

FICHA TÉCNICA DE PRODUTO

PRODUCT DATASHEET

HMI – Automação e Instrumentação, Lda.

Travessa da Indústria, nº 111 4780-573 Santo Tirso PORTUGAL Tel. +351 252 850 501 Fax. +351 300 013 487

Web: www.hmi.pt Email: hmi@hmi.pt

Data Sheet DS/266XDH-EN Rev. L

Model 266DDH Differential Model 266HDH Gauge Model 266NDH Absolute

Engineered solutions for all applications

Measurement made easy



Base accuracy

- from 0.06 % of calibrated span

Reliable sensing system coupled with very latest digital technologies

- provides large turn down ratio up to 60:1

Comprehensive sensor choice

- optimize in-use total performance and stability

Flexible configuration facilities

- provided locally via local LCD keypad

New TTG (Through-The-Glass) keypad technology

 allows quick and easy local configuration without opening the cover, even in explosion proof environments

IEC 61508 certification

- version for SIL2 (1001) and SIL3 (1002) applications

PED compliance to Sound Engineering Practice (SEP)

WirelessHART version

- the battery powered solution compliant to IEC 62591

Best-in-class battery life

- up to 10 years @ 32 s update time
- in-field replaceable



General description

Model 266xx detailed in this data sheet apply for those transmitters which include on high pressure measuring side, a direct mount seal which is integral to the transducer by a short capillary connection inside a protective rigid tube. This construction forms a standalone single assembly suitable to be mounted to the process by the seal mounting facilities. By properly selecting the high and low pressure side variant in the ordering codes model 266DDH can be in the following versions:

- a) one direct mount seal and one flange for process connection, direct 1/4 18 NPT or 1/2 14 NPT through adapter; this allows also to connect the other leg (wet or dry) for differential measurement.
- b) one direct mount seal and one remote seal with capillary; the two seals allow again a differential measurement and must be selected of same type/size.

Model 266HDH and 266NDH have the direct mount seal on the positive side, respectively with the reference at atmospheric or vacuum pressure, for gauge or absolute measurements.

Refer to S26 seals data sheet for additional data and details relevant to seal element. The following table list the types of standard seal which can be mounted with 266xD transmitters (the mnemonic is used as reference in the compatibility table).

Seal model	Seal type	Seal diaphragm size	Mnemonic
	Flanged flush diaphragm	2 in. / DN 50	P2 - F2 if low thickness
S26FA	(ASME and EN standards;	3 in. / DN 80	P3 - F3 if low thickness
S26FE	fixed and rotating flange)	4 in. / DN 100	P3 - F3 if low thickness
S26RA	Flanged extended diaphragm	2 in. / DN 50	E2 - F1.5 if fixed flange
S26RE	(ASME and EN standards;	3 in. / DN 80	E3 - F2.5 if fixed flange
	fixed and rotating flange)	4 in. / DN 100	P3 - F2.5 if fixed flange
S26RJ	Flanged flush diaphragm	A 50	P2
	(JIS standards;	A 80	P3
	only rotating flange)	A 100	P3
S26RR	Flanged flush diaphragm	1.5 in.	P1.5
	(Ring Joint ASME	2 in.	P2
	standards; rotating flange)	3 in.	P3
S26RH	Flanged to ISO 10423 flush diaphragm (API)	1 13/16 in.	H1.5
	(ONLY WITH 266HDH)	2 1/16 in.	P1.5
S26TT	Threaded off-line flanged	2 1/2 in.	T 2.5
S26MA S26ME	Off-line flanged (ASME and EN standards)	2 1/2 in.	T 2.5
	Beverage	1 1/2 in.	K 1.5
S26SS	Union nut, Triclamp,	2 in. / F50	S2
	Sanitary, Aseptic	3 in. / 4 in. / F80	S3
	Cherry Burrel	2 in.	S2.5
		3 in. / 4 in.	S3.5
S26VN	Saddle and Socket (NOT DIRECT MOUNT WITH 266DDH)	2 1/2 in.	P1.5
	In-line type	1 in.	J1
S26JN	(ONLY DIRECT MOUNT	1 1/2 in.	J1.5
	WITH 266HDH / 266NDH)	2 in.	J2
		3 in.	J3
	Pulp & Paper	1 in. ball valve (NOT AVAILABLE WITH 266NDH)	Y1
	application specific	1 in. (gasketed, NPT, Gas)	M1
S26KN	(ONLY DIRECT MOUNT	1 1/2 in. (gasketed)	M1.5
	WITH 266HDH / 266NDH)	1 1/2 in. (NPT - Gas)	M1.5A
		1 1/2 in. (M44 thread)	M1.5B

Functional Specifications

Range and span limits

Sensor	Upper	Lower Rang	e Limit (LRL)		Minimum spa	n	Compatibility (allo	wed seal)
Code	Range	266DDH	266DDH	266HDH gauge		266HDH or	Direct mount seal	Direct mount plus
	Limit	differential	gauge	or 266NDH		266NDH	only (different	remote seal for 266DDH
	(URL)			absolute		with S26KN	from S26KN)	(max length in m)
	16 kPa	–16 kPa	–16 kPa		0.8 kPa		P2, P3, F2, F3,	P2(1), P3(3), F2(2), F3(4)
Е	160 mbar	-160 mbar	–160 mbar		8 mbar		E3, F2.5, T2.5	E3(2), F2.5(2), T2.5(2),
	64 inH2O	-64 inH2O	-64 inH2O		3.2 inH2O		S3, S3.5	S3(3), S3.5(3)
	40 kPa	–40 kPa	-40 kPa	-40 kPa (∆)	0.67 kPa	1.34 kPa	P2, P3, F2, F3, E2	P2(3), P3(5), F2(4),
F	400 mbar	-400 mbar	–400 mbar	-400 kPa (∆)	6.7 mbar	13.4 mbar	E3, F2.5, T2.5, K1.5	F3(6), E3 (3), F2.5 (6),
	160 inH2O	-160 inH2O	-160 inH2O	-160 inH2O (Δ)	2.67 inH2O	5.34 inH2O	S2, S3, S2.5, S3.5	T2.5 (4), S3 (4), S3.5 (4)
	160 kPa	–160 kPa	0.07 kPa abs (§)	0.07 kPa abs (§)	2.67 kPa	5.34 kPa	ALL except H1.5	P1.5(3), P2(5), P3(10), F2(8), F3(12),
Н	1600 mbar	-1600 mbar	0.7 mbar abs (§)	0.7 mbar abs (§)	26.7 mbar	53.4 mbar	and all Jx	E2(4), E3(8), F1.5(3), F2.5(10),
	642 inH2O	-642 inH2O	0.5 mmHg (§)	0.5 mmHg (§)	10.7 inH2O	21.4 inH2O		T2.5(8), S2(3), S2.5(3), S3(8), S3.5(8)
	600 kPa	-600 kPa	0.07 kPa abs (§)	0.07 kPa abs (§)	10 kPa	20 kPa		P1.5(5), P2(8), P3(10), F2(12), F3(16),
М	6 bar	-6 bar	0.7 mbar abs (§)	0.7 mbar abs (§)	0.1 bar	0.2 bar	ALL except H1.5	E2(6), E3(10), F1.5(6), F2.5(12),
	87 psi	–87 psi	0.5 mmHg (§)	0.5 mmHg (§)	1.45 psi	2.9 psi		T2.5(8), S2(6), S2.5(6), S3(8), S3.5(8)
	2400 kPa	–2400 kPa	0.07 kPa abs (§)	0.07 kPa abs (§)	40 kPa	80 kPa		P1.5(5), P2(8), P3(10), F2(16), F3(16),
Р	24 bar	–24 bar	0.7 mbar abs (§)	0.7 mbar abs (§)	0.4 bar	0.8 bar	ALL except H1.5	E2(6), E3(10), F1.5(6), F2.5(12),
	348 psi	–348 psi	0.5 mmHg (§)	0.5 mmHg (§)	5.8 psi	11.6 psi		T2.5(10), S2(6), S2.5(6), S3(8), S3.5(8)
	8000 kPa	-8000 kPa	0.07 kPa abs (§)	0.07 kPa abs (§)	134 kPa	267 kPa		P1.5(5), P2(8), P3(10), F2(16), F3(16),
Q	80 bar	-80 bar	0.7 mbar abs (§)	0.7 mbar abs (§)	1.34 bar	2.67 bar	ALL except H1.5	E2(6), E3(10), F1.5(6), F2.5(12),
	1160 psi	-1160 psi	0.5 mmHg (§)	0.5 mmHg (§)	19.4 psi	38.7 psi		T2.5(10), S2(6), S2.5(6), S3(8), S3.5(8)
	16000 kPa	-16000 kPa	0.07 kPa abs (§)	0.07 kPa abs (§)	267 kPa	534 kPa	P1.5, P2, P3, F2,	P1.5(5) ,P2(8), P3(10),
S	160 bar	-160 bar	0.7 mbar abs (§)	0.7 mbar abs (§)	2.67 bar	5.34 bar	F3, F1.5, F2.5,	F2(16), F3(16), F1.5(6),
	2320 psi	–2320 psi	0.5 mmHg (§)	0.5 mmHg (§)	38.7 psi	77.4 psi	T2.5, Jx (all)	F2.5(12),T2.5(10)
	70000 kPa			0.07 kPa abs (•)	1400 kPa (•)		P1.5, P2, P3, F2,	
W	700 bar			0.7 mbar abs (•)	14 bar (•)		F3, T2.5, H1.5	
	10500 psi			0.5 mmHg (•)	203 psi (•)			
	105000 kPa			0.07 kPa abs (•)	10500 kPa (•)		P1.5, P2, P3,	
Z	1050 bar			0.7 mbar abs (•)	105 bar (•)		H1.5	
	15225 psi			0.5 mmHg (•)	1522 psi (•)			

⁽ Δ) 0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg for model 266NDH

^(§) Lower Range Limit is 0.135 kPa abs, 1.35 mbar abs, 1 mmHg for inert Galden or 0.4 kPa abs, 4 mbar abs, 3 mmHg for inert Halocarbon.

(•) ONLY FOR MODEL 266HDH

Span limits

Maximum span = URL (can be further adjusted up to \pm URL (TD = 0.5) for differential models, within the range limits) IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

Zero suppression and elevation

Zero and span can be adjusted to any value within the range limits detailed in the table as long as:

— calibrated span ≥ minimum span

Damping (feature not available for WirelessHART version) Selectable time constant: between 0 and 60 s This is in addition to sensor response time.

Turn on time

Operation within specification in less than 10 s with minimum damping.

Insulation resistance

> 100 M Ω at 500 V DC (terminals to earth)

Operative limits

REFER ALSO TO S26X DATA SHEET FOR POSSIBLE FURTHER LIMITATION DUE TO SEAL VARIANTS AND FOR DATA RELEVANT TO THE POSSIBLE REMOTE SEAL (IF SELECTED ON NEGATIVE SIDE)

Pressure limits:

Overpressure limits

Without damage to the transmitter

Model 266DDH	Fill fluid	Overpressure limits
Sensor F to S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
		and 21 MPa, 210 bar, 3045 psi ⁽¹⁾
Sensor E	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
		and 16 MPa, 160 bar, 2320 psi
Sensor F to S	Inert	0.135 kPa abs, 1.35 mbar abs, 1 mmHg
	(Galden)	and 21 MPa, 210 bar, 3045 psi ⁽¹⁾
Sensor E	Inert	0.135 kPa abs, 1.35 mbar abs, 1 mmHg
	(Galden)	and 16 MPa, 160 bar, 2320 psi
Sensor F to S	Inert	0.4 kPa abs, 4 mbar abs, 3 mmHg
	(Halocarbon)	and 21 MPa, 210 bar, 3045 psi ⁽¹⁾
Sensor E	Inert	0.4 kPa abs, 4 mbar abs, 3 mmHg
	(Halocarbon)	and 16 MPa, 160 bar, 2320 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

		T
Models 266HDH	Fill fluid	Overpressure limits
and 266NDH		
Sensor P, Q, S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
		and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
		and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert	0.135 kPa abs, 1.35 mbar abs, 1 mmHg
	(Galden)	and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert	0.135 kPa abs, 1.35 mbar abs, 1 mmHg
	(Galden)	and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert	0.4 kPa abs, 4 mbar abs, 3 mmHg
	(Halocarbon)	and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert	0.4 kPa abs, 4 mbar abs, 3 mmHg
	(Halocarbon)	and 14 MPa, 140 bar, 2030 psi
Sensor W	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
(266HDH only)		and 105 MPa, 1050 bar, 15225 psi
Sensor Z	No filling	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
(266HDH only)		and 135 MPa. 1350 bar. 19570 psi

Static pressure limits

Transmitters for differential pressure model 266DDH operates within specifications between the following limits:

Sensors	Static pressure limits
Sensor F to S with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
(direct mount and remote)	and 21 MPa, 210 bar, 3045 psi ⁽¹⁾
Sensor F to S with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia
(direct mount only)	and 21 MPa, 210 bar, 3045 psi ⁽¹⁾
Sensor E with 2 seals (direct	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg
mount and remote)	and 16 MPa, 160 bar, 2320 psi
Sensor E with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia
(direct mount only)	and 16 MPa, 160 bar, 2320 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

Overpressure and static upper limit can be derated by the flange rating of seal, as follows

Seal model S26RE	Carbon steel flange	AISI 316 ss flange
to EN 1092-1	@ 120 °C	@ 20 °C
PN 16	16 bar	16 bar
PN 40	40 bar	40 bar
PN 63	63 bar	63 bar
PN 100	100 bar	100 bar

Seal model S26RA and	Carbon Steel	AISI 316 ss flange
S26RR to ASME B16.5	@ 100 °F (38 °C)	@ 100 °F (38 °C)
Class 150	285 psi	275 psi
Class 300	740 psi	720 psi
Class 600	1480 psi	1440 psi
Class 900	2220 psi	2160 psi
Class 1500	3705 psi	3600 psi

Seal model S26RJ	Carbon steel flange	AISI 316 ss flange
to JIS B 2220	@ 120 °C	@ 120 °C
10K	14 bar	14 bar
20K	36 bar	36 bar
40K	68 bar	68 bar

Seal model S26RH	AISI 316 ss flange			
to ISO1 0423 (API 6A)	-29 38 °c (-20 100 °F)	@ 93 °C (200 °C)		
API 10000	69.5 MPa, 10000 psi	60 MPa, 8687 psi		
API 15000	103.5 MPa, 15000 psi	89.2 MPa, 12937 psi		

Seal model S26FE to EN 1092-1	AISI 316 L ss flange @ 20 °C
PN 16	16 bar
PN 40	40 bar
PN 63	63 bar
PN 100	100 bar

Seal model S26FA to ASME B16.5	AISI 316 L ss flange @ 100 °F (38 °C)
Class 150	230 psi
Class 300	600 psi
Class 600	1200 psi

Seal model S26ME to EN 1092-1	AISI 316 ss or Hastelloy C flange
PN 16 / 40	40 bar @ 25 °C (77 °F)

Seal model S26MA AISI 316 L ss flange		Hastelloy C flange
to ASME B16.5	@ 25 °C (77 °F)	@ 25 °C (77 °F)
Class 150	230 psi	290 psi
Class 300	600 psi	750 psi

The pressure limit decreases with increasing temperature above to the specified values as defined for the material, respectively for ASME B16.5, EN 1092-1, JIS or ISO 10423 standards.

Seal model	Temperature range	Pressure limit
S26TT bolting		
AISI 316 ss or	0 100 °C (32 212 °F)	21 MPa, 210 bar, 3045 psi
Carbon steel	-60 0 °C (-76 32 °F)	16 MPa, 160 bar, 2320 psi
	100 360 °C (212 680 °F)	16 MPa, 160 bar, 2320 psi
Alloy steel	0 37.8 °C (32 100 °F)	21 MPa, 210 bar, 3045 psi
	-48.3 0 °C (-55 32 °F)	16 MPa, 160 bar, 2320 psi
	37.8 360 °C (100 680 °F)	13 MPa, 130 bar, 1885 psi

Seal model S26JN

up to 16 MPa, 160 bar, 2320 psi

but not greater then rating of mounting flange (NOT SUPPLIED)

Seal model S26WA to ASME B16.5

up to 41.37 MPa, 413.7 bar, 6000 psi

but not greater then rating of mounting flange (NOT SUPPLIED)

Seal model S26WE to EN 1092-1	
Form B1	40 MPa, 400 bar, 5800 psi
Form D	16 MPa, 160 bar 2320 psi
Form E	10 MPa, 100 bar, 1450 psi

but not greater then rating of mounting flange (NOT SUPPLIED)

Seal model S26KN	
1 in seal - sealing with gaskets	3 MPa, 30 bar, 435 psi
1 1/2 in seals - sealing with gasket	5 MPa, 50 bar, 725 psi
1 in seal with ball valve connection	4 MPa, 40 bar, 580 psi
1 in NPT, 1 1/2 in NPT	34.5 MPa, 345 bar, 5000 psi
G 1 in A, G 1 1/2 in A	60 MPa, 600 bar, 8700 psi

Seal model	Temperature range	Pressure limit
S26VN bolting		
Alloy steel	0 37.8 °C (32 100 °F)	16 MPa, 160 bar, 2320 psi
	-48.3 0 °C (-55 32 °F)	10 MPa, 100 bar, 1450 psi
	37.8 360 °C (100 680 °F)	10 MPa, 100 bar, 1450 psi

Seal model S26SS	Pressure limit
Triclamp 2 in.	3.8 MPa, 38 bar, 550 psi
Triclamp 3 in.	2.4 MPa, 24 bar, 350 psi
Triclamp 4 in.	1.7 MPa, 17 bar, 250 psi
Union nut F50	2.5 MPa, 25 bar, 360 psi
Union nut F80	2.5 MPa, 25 bar, 360 psi
Cherry Burrel 2 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 3 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary flush 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary extended 4 in.	1.9 MPa, 19 bar, 275 psi
Beverage bolted type 1 1/2 in.	4 MPa, 40 bar, 580 psi
V-band clamp option	1 MPa, 10 bar, 145 psi
4in schedule 5 V-band clamp option	0.7 MPa, 7 bar, 100 psi

Proof pressure

The transmitter can be exposed without leaking to line pressure of up to

Model	Sensor	Proof pressure
266DDH	Sensor F to S	40.25 MPa, 402.5 bar, 5836 psi
	Sensor E	31.5 MPa, 315 bar, 4567 psi
266HDH	Sensor F, H, M	28 MPa, 280 bar, 4060 psi
266NDH	Sensor P, Q, S	40.25 MPa, 402.5 bar, 5836 psi
266HDH	Sensor W	171.5 MPa, 1715 bar, 24868 psi
	Sensor Z	210.5 MPa, 2105 bar, 30522 psi

or two times the flange rating of seal, whichever is less. Meet ANSI/ISA-S 82.03 hydrostatic test requirements.

Temperature limits °C (°F): Ambient

is the operating temperature

Models 266DDH	Ambient temperature limits
Silicone oil for sensor F to S	-40 and 85 °C (-40 and 185 °F)
Silicone oil for sensor E	-25 and 85 °C (-13 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Galden) for sensor E	-10 and 85 °C (14 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor E	-10 and 85 °C (14 and 185 °F)

Model 266HDH - 266NDH	Ambient temperature limits
Silicone oil for sensor F to W	-40 and 85 °C (-40 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Sensor Z without filling	-40 and 85 °C (-40 and 185 °F)

Models 266DDH - 266HDH - 266NDH	Ambient temperature limit
Painted AISI 316 L ss housing	max 70 °C (158 °F) countinuous

Models 266DDH - 266HDH - 266NDH	Ambient temperature limits
LCD integral display	-40 and 85 °C (-40 and 185 °F)

LCD display may not be clearly readable below –20 °C (–4 °F) or above +70 °C (+158 °F)

IMPORTANT

For Hazardous Atmosphere applications see the temperature range specified on the certificate/approval relevant to the aimed type of protection

Process

Model 266DDH (side without seal)	Process temperature limits
Silicone oil for sensor F to S	-40 and 121 °C (-40 and 250 °F) (1)
Silicone oil for sensor E	-25 and 121 °C (-13 and 250 °F) (1)
Inert (Galden) for sensor F to S	-20 and 100 °C (-4 and 212 °F) (2)
Inert (Galden) for sensor E	-10 and 100 °C (14 and 212 °F) (2)
Inert (Halocarbon) for sensor F to S	-20 and 100 °C (-4 and 212 °F) (2)
Inert (Halocarbon) for sensor E	-10 and 100 °C (14 and 212 °F) (2)
Viton gasket	-20 and 121 °C (-4 and 250 °F)

(1) 100 °C (212 °F) for application below atmospheric pressure

(2) 65 °C (150 °F) for application below atmospheric pressure

Seals model (mnemonic)	Process temperature limits
S26JN In-line type (J1, J1.5, J2, J3)	-40 and 180 °C (-40 and 356 °F)
S26KN Pulp & Paper (M1, M1.5 all)	-40 and 150 °C (-40 and 302 °F)
S26KN Pulp & Paper (Y1)	-20 and 130 °C (-4 and 266 °F)
S26SS Beverage (K1.5)	-40 and 150 °C (-40 and 302 °F)
S26SS with Ethylene Propylene	-40 and 121 °C
gasket EPDM 3-A 18-03 Class II	(-40 and 250 °F)
S26SS with Ethylene Propylene gasket	-40 and 149 °C (-40 and 300 °F)
S26XX with PFA anti-stick coating	max. 204 °C (max 400 °F)
S26SS with Ethylene Propylene gasket EPDM 3-A 18-03 Class II S26SS with Ethylene Propylene gasket	-40 and 121 °C (-40 and 250 °F) -40 and 149 °C (-40 and 300 °

Seal model S26VN	Process temperature limits			
PTFE gasket	-100 and 260 °C (-148 and 500 °F)			
Graphite gasket	-100 and 360 °C (-148 and 680 °F)			

The following table show characteristics of fill fluids when used in transmitters with direct mount seal on high pressure side.

Fill fluid	Process temperature and pressure limits						
(application)	Tmax	Pmin	Tmax	Tmin			
	@ Pabs	mbar abs	°C (°F)	°C (°F)			
	greater than	(mmHg)	@ Pmin				
Silicone oil PMX 200	250 (480)	0.7	130	-40			
10 cSt	@ 385 mbar	(0.5)	(266)	(-40)			
Silicone oil Baysilone PD5	250 (480)	0.7	45	-85			
5 cSt	@ 900 mbar	(0.5)	(113)	(-121)			
Inert oil Galden G5	160 (320)	2.1	60	-20			
(oxygen service)	@ 1 bar	(1.52)	(140)	(-4)			
Inert oil Halocarbon 4.2	180 (356)	4	70	-20			
(oxygen service)	@ 425 mbar	(3)	(158)	(-4)			
Silicone polymer Syltherm XLT	100 (212)	2.1	20	-100			
(cryogenic service)	@ 118 mbar	(1.52)	(68)	(-148)			
Silicone oil for	250 (480)	0.7	220	-10			
high temperature	@ 3.5 mbar	(0.5)	(428)	(14)			
Vegetable oil Neobee M-20	200 (390)	10	20	-18			
(food - sanitary) FDA approved	@ 1 bar	(7.2)	(68)	(O)			
Mineral oil Esso Marcol 152	250 (480)	0.7	110	-6			
(food - sanitary) FDA approved	@ 630 mbar	(0.5)	(230)	(21)			
Glycerin Water 70%	93 (200)	1000	93	-7			
(food - sanitary) FDA approved	@ 1 bar	(760)	(200)	(20)			

Flushing ring	Process limits	Process limits					
gasket material	Pressure (max.)	PxT					
Garlock	6.9 MPa, 69 bar,	-73 and 204 °C	250000				
	1000 psi	(-100 and 400 °F)	(°F x psi)				
Graphite	2.5 MPa, 25 bar,	-100 and 380 °C					
	362 psi	(-148 and 716 °F)					
PTFE	6 MPa, 60 bar,	-100 and 250 °C					
	870 psi	(-148 and 482 °F)					

Storage

Models 266DDH - 266HDH - 266NDH	Storage temperature limits
Storage limits	-50 and 85 °C (-58 and 185 °F)
LCD integral display	-40 and 85 °C (-40 and 185 °F)

Environmental limits

Electromagnetic compatibility (EMC)

Comply with 2014/30/UE to standards EN 61326-1:2013. For IEC 61508 SIL certified transmitter to EN 61326-3-1:2008. For transmitter with option "YE" to NAMUR NE 021 (2004). Surge immunity level (with surge protector): 4 kV (according to IEC 61000-4–5 EN 61000–4–5)

Pressure equipment directive (PED)

Comply with 2014/68/UE to standards ANSI/ISA 61010-1:2012 following Sound Engineering Practice (SEP).

Humidity

Relative humidity: up to 100 % Condensing, icing: admissible

Vibration resistance

Accelerations up to 2 g at frequency up to 1000 Hz (according to IEC 60068–2–6)

Shock resistance

Acceleration: 50 g Duration: 11 ms

(according to IEC 60068-2-27)

Wet and dust-laden atmospheres

The transmitter is dust and sand tight and protected against immersion effects as defined by IEC 60529 (2001) to IP 67 (IP 68 on request) or by NEMA Type 4X. IP65 with Harting Han connector.

Aluminium and AISI housings as barrel version also comply to IP 66 as defined by IEC 60529 (2001).

Hazardous atmospheres (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

INTRINSIC SAFETY Ex ia:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T6...T4 Ga and II 1/2 G Ex ia IIC T6...T4 Ga/Gb and II 1 D Ex ia IIIC T85 °C Da and II 1/2 D Ex ia IIIC T85 °C Da; IP67.

IECEx (code E8) approval

Ex ia IIC T6...T4 Ga and Ex ia IIIC T85 °C Da; IP67.

NEPSI China (code EY)

Ex ia IIC T4/T5/T6 Ga. Ex ia IIC T4/T5/T6 Ga/Gb.

Ex iaD 20 T85/T100/T135, Ex iaD 20/21 T85/T100/T135.

EXPLOSION PROOF:

ATEX Europe (code E2) approval

II 1/2 G Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

II 1/2 D Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

IECEx (code E9) approval

Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

NEPSI China (code EZ)

Ex d IIC T6 Gb, Ex tD A21 IP67 T85 °C.

INTRINSIC SAFETY Ex ic:

ATEX Europe (code E3) type examination

II 3 G Ex ic IIC T6...T4 Gc and II 3 D Ex tc IIIC T85 °C Dc; IP67.

IECEx (code ER) type examination

Ex ic IIC T6...T4 Gc and Ex tc IIIC T85 °C Dc; IP67.

NEPSI China (code ES) type examination

Ex ic IIC T4~T6 Gc, Ex nA IIC T4~T6 Gc, Ex tD A22 IP67 T85 °C.

COMBINED ATEX (code E7 = E1 + E2), (code EW = E1 + E2 + E3)

COMBINED IECEx (code EH = E8 + E9), (code EI = E8 + E9 + ER)

COMBINED NEPSI (code EP = EY + EZ), (code EQ = EY + EZ + ES)

Hazardous atmospheres (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

FM Approvals US (code E6) and FM Approvals Canada (code E4):

- Explosionproof (US): Class I, Division 1, Groups A, B, C, D; T5
- Explosionproof (Canada): Class I, Division 1, Groups B, C, D; T5
- Dust-ignitionproof: Class II, Division 1, Groups E, F, G; Class III, Div. 1; T5
- Flameproof (US): Class I, Zone 1 AEx d IIC T4 Gb
- Flameproof (Canada): Class I, Zone 1 Ex d IIC T4 Gb
- Nonincendive: Class I, Division 2, Groups A, B, C, D T6...T4
- Energy limited (US): Class I, Zone 2 AEx nC IIC T6...T4
- Energy limited (Canada): Class I, Zone 2 Ex nC IIC T6...T4
- Intrinsically safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G T6...T4 Class I, Zone 0 AEx ia IIC T6...T4 (US) Class I, Zone 0 Ex ia IIC T6...T4 (Canada)

Type 4X, IP67 for all above markings.

COMBINED FM Approvals US and Canada

- Intrinsically safe (code EA)
- Explosionproof, Flameproof and Dust-ignitionproof (code EB)
- Nonincendive and Energy Limited (code EC)

COMBINED ATEX, FM and IECEx Approvals (code EN = EW + E4 + E6+ EI)

Technical Regulations Customs Union EAC (Russia, Kazakhstan, Belarus), Inmetro (Brazil), Kosha (Korea)

Hazardous atmospheres (ONLY FOR WirelessHART VERSION)

With or without integral display

INTRINSIC SAFETY:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T4 and II 1/2 G Ex ia IIC T4.

IECEx (code E8) approval

Ex ia IIC T4.

FM Approvals US and FM Approvals Canada:

- Intrinsically safe: Class I, Div. 1, Groups A, B, C, D; T4 (code EA)

Class I, Zone 0 AEx ia IIC T4, Gb (FM US)

Class I, Zone 0 Ex ia IIC T4, Gb (FM Canada)

COMBINED ATEX, IECEx and FM Approvals US and Canada (Code EF = E1 + E8 + EA)


IMPORTANT

REFER TO CERTIFICATES FOR AMBIENT TEMPERATURE RANGES RELATED TO THE DIFFERENT TEMPERATURE CLASSES.

Electrical Characteristics and Options

Optional indicators Integrated digital display (code LS; only with HART standard functionality)

Wide screen LCD, 128 x 64 pixel, 52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix. Two keys for zero/span or without keypad. User selectable application-specific visualizations.



Integral display with integral keypad (code L1; not with HART standard functionality)

Wide screen LCD, 128 x 64 pixel, 52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix. Multilanguage. Four keys for configuration and management of device.

Easy setup for quick commissioning. User selectable application-specific visualizations.

Totalized and instantaneous flow indication.

Display may also indicate static pressure, sensor temperature and diagnostic messages and provides configuration facilities.

Integral display with Through-The-Glass (TTG) activated keypad (code L5; not with HART standard functionality)

As above integral display but equipped with the innovative TTG keypad allowing the activation of the configuration and management menus of the device without the need of removing the transmitter housing cover. TTG keypad is protected against accidental activations.



Optional surge protection

Up to 4kV

- voltage 1.2 μs rise time / 50 μs delay time to half value
- current 8 μs rise time / 20 μs delay time to half value

Process diagnostics (PILD)

Plugged impulse line detection (PILD) generates a warning via communication (HART, PA, FF). The device can be configured to drive the output to "Alarm current" or set a status "BAD".

HART® digital communication and 4 to 20 mA output Standard and Advanced functionality

Device type: 1a07_{hex} (listed with HCF)

Power supply

The transmitter operates from 10.5 to 42 V DC with no load and is protected against reverse polarity connection (additional load allows operations over 42 V DC). For Ex ia and other intrinsically safe approval power supply must not exceed 30 V DC. Minimum operating voltage increases to 12.3 V DC with optional surge protector or to 10.8 V DC with optional conformity to NAMUR NE 21 (2004).

Ripple

20 mV max on a 250 Ω load as per HART specifications.

Load limitations

4 to 20 mA and HART total loop resistance: R $(k\Omega) = \frac{\text{Supply voltage - min. operating volt}}{\text{Supply voltage - min. operating voltage}}$ 22 mA

A minimum of 250 Ω is required for HART communication.

Output signal

Two-wire 4 to 20 mA, user-selectable for linear or square root output, power of 3/2 or 5/2, square root for bidirectional flow, 22 points linearization table (i.e. for horizontal or spherical tank level measurement).

HART® communication provides digital process variable superimposed on 4 to 20 mA signal, with protocol based on Bell 202 FSK standard.

HART revision 5 is the default HART output. HART revision 7 is available on request.

Output current limits (to NAMUR NE 43 standard)

Overload condition

- Lower limit: 3.8 mA (configurable from 3.8 to 4 mA)
- Upper limit: 20.5 mA (configurable from 20 to 21 mA) Alarm current

- Lower limit: 3.6 mA (configurable from 3.6 to 4 mA)
- Upper limit: 21 mA (configurable from 20 to 23 mA, limited to 22 mA for HART Safety;

apply for electronics release 7.1.15 or later)

Factory setting: high alarm current

IEC 62591 WirelessHART® output

Device type: 1a06_{hex} (listed with HCF) Network ID: ABB_{hex} (2747 decimal)

Join keys: 57495245_{hex} (1464422981) 4c455353 $_{\text{hex}}$ (1279611731) 4649454c $_{\text{hex}}$ (1179206988) 444b4559 $_{\text{hex}}$ (1145783641).

Power Supply

1x D-cell size lithium-thionyl chloride battery.

Battery life: 10 years at 32 sec. update time, 8 years at 16 sec. update time or 5 years at 8 sec. update time.

(at reference conditions of 25 ± 2 °C ambient temperature, data routed from 3 additional devices, LCD off).

THE BATTERY CAN BE REPLACED IN FIELD, ALSO IN

Output signal

IEC 62591 WirelessHART Version 7.5 (IEEE 802.15.4-2006); Frequency band: 2.4 GHz DSSS

Update rate: user selectable from 1 sec. to 60 min.

Integrated adjustable omnidirectional antenna

- Output radio frequency: maximum 10 mW (10 dBm) EIRP

- Range: up to 300 m. (328 yds.)

HAZARDOUS CLASSIFIED AREA.

Minimum distance between antenna and person is 0.2 m. (8 in.)

Telecommunications directive

Every wireless measuring device must be certified in accordance with the telecommunications directive, in this case the frequency range. This certification is country-specific.

European directives

Radio Equipment & Telecommunications Terminal Equipment Directive 2014/53/UE to standards EN 60950-1:2013, EN 62311:2008, EN 301 489-1 V1.9.2, EN 301 489-17 V2.2.1, EN 300 328 v1.8.1.

In Europe, use of the 2400 - 2483.5 MHz frequency band is not harmonized. Country-specific regulations must be observed.

Restrictions for Norway

Operation not permitted within a radius of 20 km around Ny-Alesund in Svalbard. For more information, see www.npt.no Norway Posts and Telecommunications site

Extra-european radio frequency licences

USA to FCC Part 15.247:2009; Canada to IC RSS-210 and ICES-003; Mexico; India; United Arab Emirates (UAE)

PROFIBUS® PA output

Device type

Pressure transmitter compliant to Profiles 3.0.1

Identification number: 3450_{hex}

Power supply

The transmitter operates from 9 to 32 V DC , polarity independent, with or without surge protector. For Ex ia approval power supply must not exceed 17.5 V DC. Intrinsic safety installation according to FISCO model.

Current consumption

operating (quiescent): 15 mA fault current limiting: 20 mA max.

Output signal

Physical layer in compliance to IEC 61158–2/EN 61158–2. Transmission to Manchester II modulation, at 31.25 kbit/s.

Output interface

PROFIBUS PA communication according to Profibus DP50170 Part 2/DIN 19245 part 1–3.

Output update time

25 ms

Data blocks

3 analog input, 1 physical.

Additional blocks

1 Pressure with calibration transducer block

1 Advanced Diagnostics transducer block including Plugged Input Line Detection

1 Local Display transducer block

Transmitter failure mode

On gross transmitter failure condition, detected by selfdiagnostics, the output signal can be driven to defined conditions, selectable by the user as safe, last valid or calculated value.

If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

FOUNDATION Fieldbus™ output

Device type

LINK MASTER DEVICE

Link Active Scheduler (LAS) capability implemented.

Manufacturer code: 000320_{hex} Device type code: 0007_{hex}

Power supply

The transmitter operates from 9 to 32 V DC, polarity independent, with or without surge protector. For Ex ia approval power supply must not exceed 24 V DC (FF–816 certification) or 17.5 V DC (FISCO certification).

Current consumption

operating (quiescent): 15 mA fault current limiting: 20 mA max.

Output signal

Physical layer in compliance to IEC 61158–2/EN 61158–2. Transmission to Manchester II modulation, at 31.25 kbit/s.

Function blocks/execution period

3 enhanced Analog Input blocks/25 ms max (each)

- 1 enhanced PID block/40 ms max.
- 1 standard ARitmetic block/25 ms
- 1 standard Input Selector block/25 ms
- 1 standard Control Selector block/25 ms
- 1 standard Signal Characterization block/25 ms
- 1 standard Integrator/Totalizer block/25 ms

Additional blocks

- 1 enhanced Resource block,
- 1 custom Pressure with calibration transducer block
- 1 custom Advanced Diagnostics transducer block including

Plugged Input Line Detection

1 custom Local Display transducer block

Number of link objects

35

Number of VCRs

35

Output interface

FOUNDATION fieldbus digital communication protocol to standard H1, compliant to specification V. 1.7.

Transmitter failure mode

The output signal is "frozen" to the last valid value on gross transmitter failure condition, detected by self-diagnostics which also indicate a BAD conditions. If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

Performance specifications

Stated at reference condition to IEC 60770 ambient temperature of 20 °C (68 °F), relative humidity of 65 %, atmospheric pressure of 1013 hPa (1013 mbar), mounting position with vertical diaphragm and zero based range for transmitter with isolating diaphragms in AISI 316 L ss or Hastelloy and silicone oil fill and HART digital trim values equal to 4 mA and to 20 mA span end points, in linear mode. Unless otherwise specified, errors are quoted as % of span. Some performance referring to the Upper Range Limit are affected by the actual turndown (TD) as ratio between Upper Range Limit (URL) and calibrated span.

IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

Accuracy rating

% of calibrated span, including combined effects of terminal based linearity, hysteresis and repeatability. For fieldbus versions SPAN refer to analog input function block outscale range

Model	Sensor	for TD		
266DDH	F	from 1:1 to 10:1	± 0.06 %	
with seals	F	from 10:1 to 60:1	± (0.006 x TD) %	
mnemonic	H to S	from 1:1 to 10:1	± 0.075 %	
P3, F2, F3,	H to S	from 10:1 to 60:1	± (0.0075 x TD) %	
E3, S3, K1.5	Е	from 1:1 to 5:1	± 0.10 %	
	Е	from 5:1 to 20:1	± (0.02 x TD) %	
266DDH with	F to S	from 1:1 to 10:1	± 0.10 %	
seals mnemonic	F to S	from 10:1 to 60:1	± (0.01 x TD) %	
different from	Е	from 1:1 to 5:1	± 0.15 %	
above	Е	from 5:1 to 20:1	± (0.03 x TD) %	

Model	Sensor	for TD		
	M and P	from 1:1 to 10:1	± 0.06 %	
	M and P	from 10:1 to 60:1	± (0.006 x TD) %	
266HDH with seals	F, H, Q, S	from 1:1 to 10:1	± 0.075 %	
mnemonic P3, F3, E3,	F, H, Q, S	from 10:1 to 60:1	± (0.0075 x TD) %	
S3, K1.5, F2	W	from 1:1 to 5:1	± 0.075 %	
	W	from 5:1 to 50:1	± (0.015 x TD) %	
	Z	from 1:1 to 5:1	± 0.15 %	
	Z	from 5:1 to 10:1	± (0.03 x TD) %	
266HDH	H and M	from 1:1 to 5:1	± 0.15 %	
with seals mnemonic	H and M	from 5:1 to 30:1	± (0.03 x TD) %	
Y1	P, Q	from 1:1 to 5:1	± 0.075 %	
	P, Q	from 5:1 to 30:1	± (0.015 x TD) %	
266HDH	H and M	from 1:1 to 5:1	± 0.15 %	
with seals mnemonic	H and M	from 5:1 to 30:1	± (0.03 x TD) %	
M1	P, Q, S	from 1:1 to 5:1	± 0.075 %	
	P, Q, S	from 5:1 to 30:1	± (0.015 x TD) %	
266HDH with seals	F, H, M, P,	from 1:1 to 5:1	± 0.075 %	
mnemonic M1.5, M1.5B	Q	from 5:1 to 30:1	± (0.015 x TD) %	
266HDH with seals	F, H, M, P,	from 1:1 to 5:1	± 0.075 %	
mnemonic M1.5A	Q, S	from 5:1 to 30:1	± (0.015 x TD) %	
	F, H, M, P,	from 1:1 to 10:1	± 0.10 %	
	Q, S	from 10:0 to 60:1	± (0.01 x TD) %	
266HDH with seals	W	from 1:1 to 5:1	± 0.10 %	
different from above	W	from 5:1 to 50:1	± (0.02 x TD) %	
	Z	from 1:1 to 5:1	± 0.20 %	
	Z	from 5:1 to 10:1	± (0.04 x TD) %	
266NDH with seals	F, H, M, P,	from 1:1 to 10:1	± 0.10 %	
mnemonic P3, F3, E3,	Q, S	from 10:1 to 60:1	± (0.01 x TD) %	
S3, K1.5, F2				
266NDH	H and M	from 1:1 to 5:1	± 0.20 %	
with seals mnemonic	H and M	from 5:1 to 30:1	± (0.04 x TD) %	
M1	P, Q, S	from 1:1 to 5:1	± 0.10 %	
	P, Q, S	from 5:1 to 30:1	± (0.02 x TD) %	
266NDH with seals	F, H, M, P,	from 1:1 to 5:1	± 0.10 %	
mnemonic M1.5, M1.5B	Q	from 5:1 to 30:1	± (0.02 x TD) %	
266NDH with seals	F, H, M, P,	from 1:1 to 5:1	± 0.10 %	
mnemonic M1.5A	Q, S	from 5:1 to 30:1	± (0.02 x TD) %	
266NDH with seals	F, H, M, P,	from 1:1 to 10:1	± 0.15 %	
different from above	Q, S	from 10:1 to 60:1	± (0.015 x TD) %	

Ambient temperature

Transmitter effect per 20K change between the limits of –40 °C to +85 °C (per 36 °F change between the limits of –40 to +185 °F):

Model	Sensor	for TD up to	
266DDH	E to S	10:1	± (0.04 % URL + 0.065 % span)
266HDH	F to W	10:1	± (0.04 % URL + 0.065 % span)
	Z	10 : 1	± (0.06 % URL + 0.10 % span)
266NDH	F to S	10 : 1	± (0.08 % URL + 0.13 % span)

REFER TO S26 SEALS DATA SHEET FOR TEMPERATURE ADDITIONAL EFFECTS OF DIRECT MOUNT SEAL AND REMOTE SEAL (if selected on negative side).

For paper and in-line seal, available only as direct mount, refer respectively to the following tables of temperature effects per 20 K (36 °F) changes, detailed separately for

- the seal (one element), as process temperature error
- the system (transmitter sensor when combined with a seal of specific size/type) referred to silicone oil (PMX 200) filling and AISI 316 L ss diaphragm materials. .

S26K paper seal size	Sensor	Seal error	Direct mount	
- Mnemonic	URL	(process)	error (ambient)	
1 in Y1	≥ 160 kPa,	1.2 kPa,	0.64 kPa,	
	642 inH2O	4.8 inH2O	2.56 inH2O	
1 in M1	≥ 160 kPa,	0.6 kPa,	0.64 kPa,	
	642 inH2O	2.4 inH2O	2.56 inH2O	
1 1/2 in.	≥ 40 kPa,	0.2 kPa,	0.48 kPa,	
M1.5 - M1.5A - M1.5B	160 inH2O	0.8 inH2O	1.92 inH2O	

S26J in-line seal	Sensor	Seal error	Direct mount
size - Mnemonic	URL	(process)	error (ambient)
1 in J1	≥ 600 kPa,	2.2 kPa,	0.94 kPa,
	87 psi	8.8 inH2O	3.76 inH2O
1 1/2 in J1.5	≥ 600 kPa,	1.4 kPa,	0.36 kPa,
	87 psi	5.6 inH2O	1.44 inH2O
2 in J2	≥ 600 kPa,	4.6 kPa,	0.94 kPa,
	87 psi	18.4 inH2O	3.76 inH2O
4 in J3	≥ 600 kPa,	3.0 kPa,	0.42 kPa,
	87 psi	12 inH2O	1.68 inH2O

Static pressure

(zero errors can be calibrated out at line pressure) per 2 MPa, 20 bar or 290 psi

Model 266DDH with direct mount seal only

zero error: ±0.15% of URLspan error: ±0.15% of reading

Model 266DDH with direct mount plus remote seal

zero error: ±0.20% of URLspan error: ±0.20% of reading

Supply voltage

Within voltage/load specified limits the total effect is less than 0.005 % of URL per volt.

Load

Within load/voltage specified limits the total effect is negligible.

Electromagnetic field

Meets all the requirements of EN 61326 for surge immunity level (of NAMUR NE 21 on request).

Common mode interference

No effect from 100Vrms @ 50Hz, or 50 V DC

Physical Specification

(Refer to ordering information sheets for variant availability related to specific model or versions code)

Materials (model 266DDH only)

Low pressure side process isolating diaphragms (*)

AISI 316 L ss; Hastelloy® C-276; Monel 400®; Tantalum. A remote seal can be selected with required diaphragm material (refer to high pressure side).

Low pressure side process flanges, adapters, plugs and drain/vent valves (*)

AISI 316 L ss (1); Hastelloy® C-276 (2); Monel 400® (3);

Bolts and nuts

AISI 316 ss bolts Class A4-80 and nuts Class A4-70 per ISO 3506;

AISI 316 ss bolts and nuts Class A4-50 per ISO 3506, in compliance with NACE MR0175 Class II.

Gaskets (*)

Viton®; PTFE.

Materials (models 266DDH / 266HDH / 266NDH)

High pressure side process diaphragm (direct mount seal) (*)

AISI 316 L ss; Hastelloy® C-276; Hastelloy® C-2000; Inconel 625; Tantalum; AISI 316 L ss or Hastelloy® C-276 with anti-stick coating; AISI 316 L ss with anti-corrosion coating; AISI 316 L ss gold plated; Superduplex ss (UNS S32750 to ASTM SA479);

Diaflex (AISI with anti-abrasion treatment).

Extension material (*)

AISI 316 L ss (also for Diaflex and gold plated diaphragms); Hastelloy® C-276; AISI 316 L ss or Hastelloy® C-276 with coating same as diaphragm

High pressure side fill fluid (direct mount seal)

Silicone oil-PMX 200®; Silicone oil for high temperature; Inert-Galden®; Inert-Halocarbon® 4.2; Silicone Polymer-Syltherm XLT®;

Low viscosity silicone oil-Baysilone® M5; Glycerin Water; Vegetable oil-Neobee® M-20; Mineral oil-Esso Marcol 152®.

Sensor fill fluid

Silicone oil; Inert fill (Halocarbon® 4.2 or Galden®).

Sensor housing

AISI 316 L ss.

Electronic housing and covers

Aluminium alloy (copper content ≤ 0.3 %) with baked epoxy finish (colour RAL9002); AISI 316 L ss;

AISI 316 L ss with two components epoxy mastic coated with acrylic epoxy finish (colour aluminium grey), with antistatic agents according to CEI EN 60079.

Covers O-ring

Buna N.

Local adjustments (zero, span and write protect)

For Standard HART version:

- Internal for zero and span (on communication board)
- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable (code R1).

For all other versions:

- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable.

Plates

Transmitter nameplate: AISI 316 ss screwed to the electronics housing.

Certification plate and optional tag/calibration plate : selfadhesive attached to the electronics housing or AISI 316 ss fastened to the electronics housing with rivets or screws. Optional wired-on customer data plate: AISI 316 ss. Laser printing on metal or thermal printing on self-adhesive. For AISI 316 L ss housing it is mandatory to select option I2 or I3 for plates in AISI 316 ss.

(*) Wetted parts of the transmitter.

- (1) Supplied as AISI 316 L or as ASTM A351 Grade CF-3M
- ⁽²⁾ Supplied as Hastelloy C-276 or as ASTM A494 alloy
- (3) Supplied as Monel 400 or as ASTM A494 Grade M-35-1

Calibration

Standard: at maximum span, zero based range, ambient temperature and pressure;

Optional: at specified range and ambient conditions.

Optional extras

Display (code Lx)

4-position (at 90°) user orientable, except "LS".

Optional plates (code Ix)

Code I2: AISI 316 ss plate with laser printed tag (up to 31 characters) and calibration details (up to 31 characters: lower and upper range values and engineering unit) fixed onto transmitter housing.

Code I1: AISI 316 ss wired-on plate with laser printed customized data (4 lines of 32 characters with 4 mm/0.16 in. height).

Surge protection (code S2)

Test Certificates (test, design, calibration, material traceability) (codes Cx and Hx)

Tag and manual language (codes Tx and Mx)

Communication connectors (code Ux)

Process connections

on conventional flanges: 1/4 in. – 18 NPT on process axis; on adapters: 1/2 in. – 14 NPT on process axis; fixing threads: 7/16 in. – 20 UNF at 41.3mm centre distance; on seal side (refer to drawings for details):

Flush diaphragm flanged seal (**):

2 in. or 3 in. ASME 150 to 1500 RF; 4 in. ASME 150-300 RF; 1-1/2 in., 2 in. or 3 in. ASME 150 to 1500 RJ; DN 50 or DN 80 PN 16-40, PN 63-100; DN 100 PN 16-40; A50 or A80 Class 10K, 20K, 40K; A100 Class 10K, 20K; 1-13/16 in. or 2-1/16 in. to ISO 10423 API10000 or API15000.

Extended diaphragm flanged seal (**):

2 in., 3 in. or 4 in. ASME 150 - 300 RF; DN 50, DN 80 or DN 100 PN 16 - 40.

Off-line flanged connection seal (***)

1/2 in., 1 in. or 1-1/2 in. hole connection, ASME CL150-300; DN 25 or DN 40, EN PN 16-40.

Off-line threaded connection seal

1/4 in., 1/2 in., 3/4 in., 1 in. or 1-1/2 in. NPT thread.

Food/Sanitary seal

Triclamp: 2 in., 3 in. or 4 in.;

Union nut: F50 or F80 to DIN 11851; Cherry Burrell: 2 in., 3 in. or 4 in.;

Sanitary: 4in flush diaphragm or 4in extended (2in, 4in or 6in)

diaphragm

Beverage bolted: 1/2 in. flush diaphragm with integral 6 holes

flanged connection

^(**) Bolts and nuts, gasket and mating flange supplied by customer.

^(***) Gasket to process supplied by customer.

Pulp & paper seal

1 in. sealing with gasket for weld spud with fixing by screw 1-1/2 in. sealing with gasket for weld spud with fixing by screws 1-1/2 in. sealing with gasket for weld spud with M44 x 1.25 threaded connection

1 in. or 1-1/2 in. with NPT male threaded connection G 1 in. A or G 1-1/2 in. A male threaded connection 1 in. for ball valve connection

Saddle & Socket seal

2 in., 2-1/2 in., 3 in., 4 in.,5 in. or 6 in.saddle connection 1/2 in., 3/4 in., 1 in.,1-1/2 in. or 2 in.socket connection

In-line seal

DN25 / 1 in., DN40 / 1-1/2 in., DN 50 / 2 in., DN80 / 3 in.

Wafer seal (remote only)

1-1/2 in., 2 in. or 3 in. to ASME; DN 40, DN 50 or DN 80 to EN.

Gasket seat finish (as applicable to specific seal types)

smooth (ASME, EN or JIS): 0.8µm (Ra) serrated (ASME or JIS): 3.2 to 6.3µm (Ra) serrated (EN 1092-1 Type B1; up to PN 40): 3.2 to 12.5µm (Ra) serrated (EN 1092-1 Type D and E): according to standard.

Electrical connections

Two $^{1}/_{2}$ in. – 14 NPT or M20x1.5 threaded conduit entries, direct on housing. Only M20x1.5 for WirelessHART with one port used for antenna.

Special communication connector (on request)

- HART: straight or angle Harting Han 8D connector and one plug.
- FOUNDATION Fieldbus, PROFIBUS PA: M12x1 or 7/8 in.
 One certified stainless steel plug (supplied loose with thread according to housing entries) available as option.

Terminal block

HART version: three terminals for signal/external meter wiring up to 2.5 mm² (14 AWG), also connection points for test and communication purposes.

WirelessHART version: connection points for test and communication purposes; additional fast connection for external harvesting unit.

Fieldbus versions: two terminals for signal wiring (bus connection) up to 2.5 mm² (14 AWG)

Grounding

Internal and external 6 mm² (10 AWG) ground termination points are provided.

Mounting position

Transmitter can be mounted in any position. Electronics housing may be rotated to any position. A positive stop prevents over travel.

Mass (without options)

7 kg to 50 kg approx (15 to 110 lb) according to specified seal(s) options; add 1.5 kg (3.4 lb) for AISI housing. Add 650 g (1.5 lb) for packing.

Packing

Carton

Configuration

Transmitter with HART communication and 4 to 20 mA Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit kPa 4 mA Zero

20 mA Upper Range Limit (URL)

Output Linear
Damping 1 s
Transmitter failure mode Upscale
Software tag (8 characters max) Blank

Optional LCD display PV in kPa; output in mA and

in percentage on bargraph

Any or all the above configurable parameters, including Lower range–value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand–held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O–ring and drain/vent materials and meter code option.

Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor 16 alphanumeric characters Message 32 alphanumeric characters

Date Day, month, year

For HART protocol available engineering units of pressure

measure are : Pa, kPa, MPa

inH2O@4 °C, mmH2O@4 °C, psi

inH2O@20 °C, ftH2O@20 °C, mmH2O@20 °C

inHg, mmHg, Torr g/cm², kg/cm², atm

mbar, bar

These and others are available for PROFIBUS and

FOUNDATION Fieldbus.

Transmitter with WirelessHART communication Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit kPa

Output scale 0 % Lower Range Limit (LRL)
Output scale 100 % Upper Range Limit (URL)

Output Linear
Update rate 16 s
Software tag (8 characters max) Blank

Optional LCD display PV in kPa; output in

percentage on bargraph

Any or all the above configurable parameters, including Lower range–value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand–held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O–ring and drain/vent materials and meter code option.

Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor 16 alphanumeric characters Message 32 alphanumeric characters

Date Day, month, year

Transmitter with PROFIBUS PA communication Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa

Output scale 0 % Lower Range Limit (LRL)
Output scale 100 % Upper Range Limit (URL)

Output Linear

Hi-Hi Limit Upper Range Limit (URL)
Hi Limit Upper Range Limit (URL)
Low Limit Lower Range Limit (LRL)
Low-Low Limit Lower Range Limit (LRL)
Limits hysteresis 0.5 % of output scale

PV filter 0 s Address (set by local key) 126

Tag 32 alphanumeric characters
Optional LCD display PV in kPa; output in percentage

on bargraph

Any or all the above configurable parameters, including the range values which must be the same unit of measure, can be easily changed by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor 32 alphanumeric characters Message 32 alphanumeric characters

Date Day, month, year

Transmitter with FOUNDATION Fieldbus communication Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and the analog input function block FB1 is configured as follows:

Measure Profile Pressure Engineering Unit kPa

Output scale 0 % Lower Range Limit (LRL)
Output scale 100 % Upper Range Limit (URL)

Output Linear

Hi-Hi Limit Upper Range Limit (URL)
Hi Limit : Upper Range Limit (URL)
Low Limit Lower Range Limit (LRL)
Low-Low Limit Lower Range Limit (LRL)
Limits hysteresis 0.5 % of output scale

PV filter time 0 s

Tag 32 alphanumeric characters
Optional LCD display PV in kPa; output in percentage

on bargraph

The analog input function block FB2 and FB3 are configured respectively for the sensor temperature measured in °C and for the static pressure measured in MPa.

Any or all the above configurable parameters, including the range values, can be changed using any host compliant to FOUNDATION fieldbus. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

Custom configuration (option N6)


The following data may be specified in addition to the standard configuration parameters:

Descriptor 32 alphanumeric characters Message 32 alphanumeric characters

Date Day, month, year

MOUNTING DIMENSIONS (not for construction unless certified) - dimensions in mm. (in.)

266DDH with barrel housing and direct mount seal S26RA/S26RE/S26RJ rotating flange Raised Face flush diaphragm

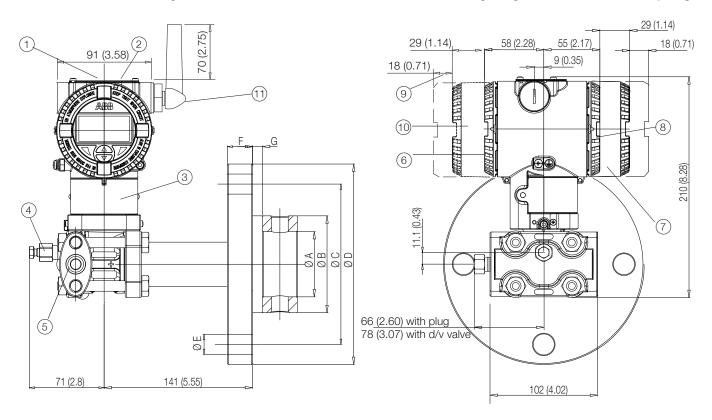


NOTE: For 266DDH, low pressure side opposite to direct mount seal can be a conventional flange or suitable for capillary to remote seal. Conventional process flange connection (1/4 in. - 18 NPT direct or 1/2 in. - 14 NPT through adapter), gasket groove and gaskets are in accordance with IEC 61518.


Bolting threads for fixing adapter or other devices (i.e. manifold etc.) on process flange is ⁷/₁₆ in. – 20 UNF.

- (1) Adjustments | (2) Identification plate | (3) Certification plate | (4) Drain/vent valve | (5) Process connection | (6) Terminal side |
- (7) L1 and L5 integral display housing | (8) Electronic side | (9) Space for cover removal (10) Battery housing of WirelessHART version |
- (11) Antenna of WirelessHART version

266DDH with DIN housing and direct mount seal S26RA/S26RE rotating flange Raised Face extended diaphragm

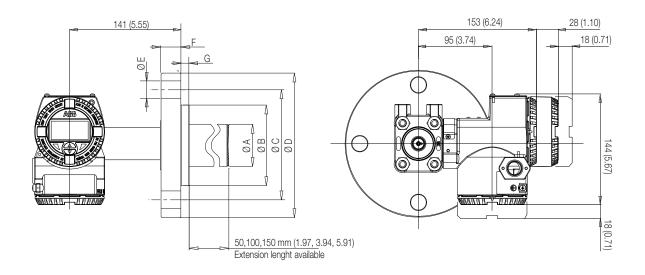

266HDH/266NDH with barrel housing and direct mount seal S26RA/S26RE flanged Raised Face extended diaphragm

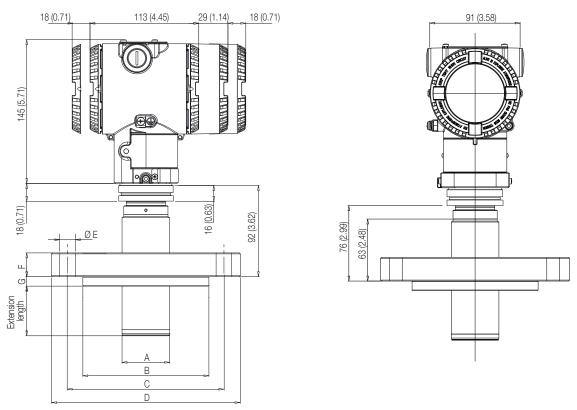

		Dimensions mm. (in.) for S26RA									
	A (dia)										
Size/Rating	extended	flush dia	aphragm	flushing ring	B (dia)	C (dia)	D (dia)	E (dia)	F	G	N° of
	diaphragm	std.	low thick.	internal dia					(Note 1)		holes
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	9.5 (0.37)	4
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	9.5 (0.37)	8
2 in. ASME CL 600	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	9.5 (0.37)	8
2 in. ASME CL 900	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
2 in. ASME CL 1500	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	4
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	26.9 (1.1)	9.5 (0.37)	8
3 in. ASME CL 600	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	31.8 (1.3)	9.5 (0.37)	8
3 in. ASME CL 900	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	190.5 (7.5)	241 (9.48)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL1500	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.7 (1.88)	9.5 (0.37)	8
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	8
4 in. ASME CL 300	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	200.2 (7.88)	254 (10)	22 (0.86)	30.2 (1.19)	9.5 (0.37)	8

					Dimension	s mm. (in.) fo	S26RE				
		Α	(dia)								
Size/Rating	extended	flush dia	aphragm	flushing ring	B (dia)	C (dia)	D (dia)	E (dia)	F	G	N° of
	diaphragm	std.	low thick.	internal dia					(Note 2)		holes
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	9.5 (0.37)	4
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	9.5 (0.37)	4
DN 50 EN PN 63	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	9.5 (0.37)	4
DN 50 EN PN 100	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	9.5 (0.37)	4
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	9.5 (0.37)	8
DN 80 EN PN 63	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	9.5 (0.37)	8
DN 80 EN PN 100	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	9.5 (0.37)	8
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 100 EN PN 40	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	162 (6.38)	190 (7.48)	235 (9.25)	22 (0.86)	21 (0.83)	9.5 (0.37)	8


			Dimension	ns mm. (in.) for	S26RJ			
Size/Rating	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	N° of
	flush diaphragm					(Note 3)		holes
A50 Class 10K	60 (2.36)	96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	16 (0.63)	9.5 (0.37)	4
A50 Class 20K	60 (2.36)	96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A50 Class 40K	60 (2.36)	104.3 (4.11)	130 (5.12)	165 (6.5)	19 (0.75)	26 (1.02)	9.5 (0.37)	8
A80 Class 10K	89 (3.5)	126 (4.96)	150 (5.91)	185 (7.28)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A80 Class 20K	89 (3.5)	132 (5.2)	160 (6.3)	200 (7.87)	23 (0.91)	22 (0.87)	9.5 (0.37)	8
A80 Class 40K	89 (3.5)	139.4 (5.49)	170 (6.69)	210 (8.27)	23 (0.91)	32 (1.26)	9.5 (0.37)	8
A100 Class 10K	89 (3.5)	151 (5.94)	175 (6.89)	210 (8.27)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A100 Class 20K	89 (3.5)	160 (6.3)	185 (7.28)	225 (8.86)	23 (0.91)	24 (0.94	9.5 (0.37)	8


Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm. (+0.12 / 0.0 in.).

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

Note 3 - Flange thickness tolerance is +1.5 / -0.0 mm. (+0.06 / 0.0 in.) up to Class 20K or +2.0 / -0.0 mm. (+0.08 / 0.0 in.) from Class 20K to Class 50K.


266HDH with barrel housing and direct mount seal S26RH flanged diaphragm seals (flush) to ISO 10423 (API standards)

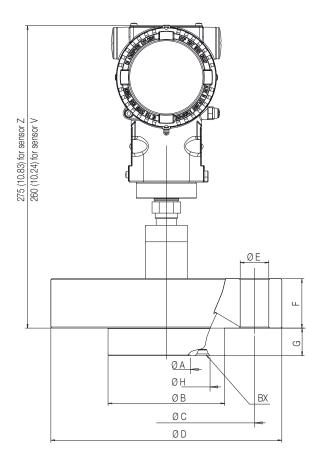


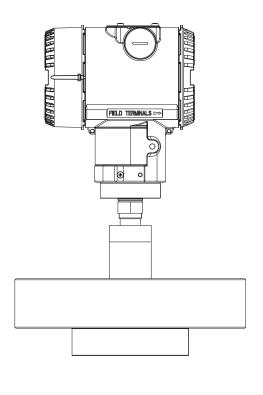

				Dimensi	ons mm. (in.)	for S26RH												
Size/Rating	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	BX	N° of								
										holes								
1 13/16 in. API 10000	40 (1.57)	105.5 (4.15)	146.1 (5.75)	185 (7.28)	23 (0.91)	42.1 (1.66)	25 (0.98)	77.77 (3.06)	BX 151	8								
1 13/16 in. API 15000	40 (1.57)	105.5 (4.15)	160.3 (6.31)	210 (8.27)	26 (1.02)	45 (1.77)	25 (0.98)	77.77 (3.06)	BX 151	8								
2 1/16 in. API 10000	50 (1.97)	112.5 (4.43)	158.8 (6.25)	200 (7.87)	23 (0.91)	44.1 (1.74)	25 (0.98)	86.23 (3.40)	BX 152	8								
2 1/16 in. API 15000	50 (1.97)	112.5 (4.43)	174.6 (6.87)	220 (8.66)	26 (1.02)	50.8 (2.00)	25 (0.98)	86.23 (3.40)	BX 152	8								


266DDH with barrel housing and direct mount seal S26RR flanged Ring Joint flush diaphragm 266HDH / 266NDH with barrel housing and direct mount seal S26RR flanged Ring Joint flush diaphragm

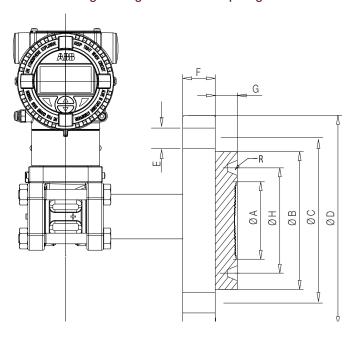

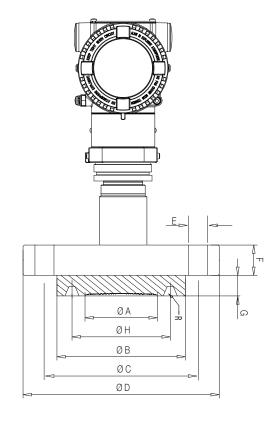


				Dimensio	ns mm. (in.) 1	for S26RR				
Size/Rating										N° of
	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	R	holes
1-1/2 in. ASME CL 150	48 (1.89)	83 (3.27)	98.6 (3.88)	127 (5)	15.75 (0.62)	17.5 (0.69)	17.3 (0.68)	65.1 (2.56)	R19	4
1-1/2 in. ASME CL 300	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	20.6 (0.81)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 600	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	22.4 (0.88)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 900/1500	48 (1.89)	92 (3.62)	124 (4.88)	177.8 (7)	28.45 (1.12)	31.8 (1.25)	20.8 (0.82)	68.3 (2.69)	R20	4
2 in. ASME CL 150	60 (2.36)	102 (4.02)	120.65 (4.75)	152.4 (6)	19.05 (0.75)	19.05 (0.75)	17.3 (0.68)	82.6 (3.25)	R22	4
2 in. ASME CL 300	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	22.35 (0.88)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 600	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	25.4 (1)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 900/1500	60 (2.36)	124 (4.88)	165 (6.5)	215.9 (8.5)	25.4 (1)	38.1 (1.5)	20.8 (0.82)	95.3 (3.75)	R24	8
3 in. ASME CL 150	89 (3.5)	133 (5.24)	152.4 (6)	190.5 (7.5)	19.05 (0.75)	23.87 (0.94)	17.3 (0.68)	114.3 (4.5)	R29	4
3 in. ASME CL 300	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	28.44 (1.12)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 600	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	31.75 (1.25)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 900	89 (3.5)	155 (6.10)	190.5 (7.5)	241.3 (9.5)	25.4 (1)	38.1 (1.50)	20.8 (0.82)	123.8 (4.87)	R31	8
3 in. ASME CL 1500	89 (3.5)	168 (6.61)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.8 (1.88)	20.8 (0.82)	136.5 (5.37)	R35	8

266DDH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face flush diaphragm

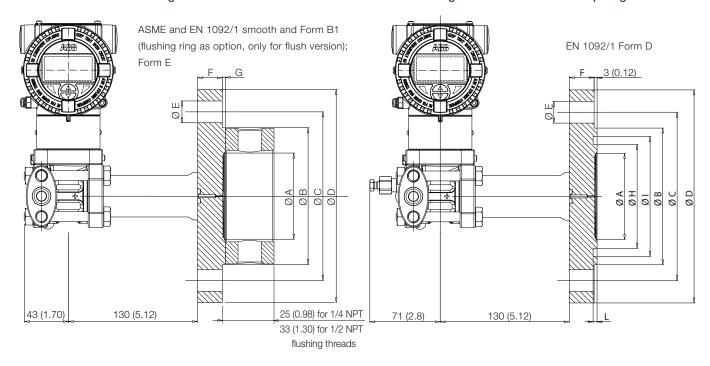

266HDH/266NDH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face

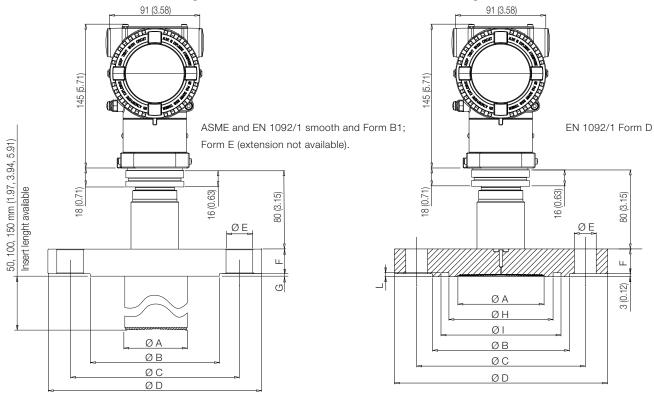

	Dimensions mm. (in.) for S26FA											
Size/Rating	A (dia)										N°	
	extended	d flush diaphragm		flushing ring							of	
	diaphragm	std.	low thick.	internal dia	B (dia)	C (dia)	D (dia)	E (dia)	F (Note 1)	G	holes	
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	2 (0.08)	4	
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	2 (0.08)	8	
2 in. ASME CL 600	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	7 (0.27)	8	
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	4	
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	26.9 (1.1)	2 (0.08)	8	
3 in. ASME CL 600	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	31.8 (1.3)	7 (0.27)	8	
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	8	

				Dimensions	mm. (in.) f	or S26FE smo	oth and For	m B1			
Size/Rating		Α	(dia)								
	extended	flush di	aphragm	flushing ring							N° of
	diaphragm	std.	low thick.	internal dia	B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	holes
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	3 (0.12)	4
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	3 (0.12)	4
DN 50 EN PN 63	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	3 (0.12)	4
DN 50 EN PN 100	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	3 (0.12)	4
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	3 (0.12)	8
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	3 (0.12)	8
DN 80 EN PN 63	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	3 (0.12)	8
DN 80 EN PN 100	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	3 (0.12)	8
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	3 (0.12)	8

Note 1 - Flange thickness tolerance is $+3.0 \ / \ -0.0$ mm. $(+0.12 \ / \ 0.0 \ in.)$.

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.


-		Dimensions mm. (in.) for S26FE Form E											
Size/Rating	diaphrag	m A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	N° of				
	std. thickness	low thickness					(Note 2)		holes				
DN 50 EN PN 16	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	13.5 (0.53)	4.5 (0.18)	4				
DN 50 EN PN 40	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	4				
DN 50 EN PN 63	60 (2.36)	58 (2.28)	87 (3.42)	135 (5.31)	180 (7.08)	22 (0.86)	21.5 (0.85)	4.5 (0.18)	4				
DN 50 EN PN 100	60 (2.36)	58 (2.28)	87 (3.42)	145 (5.71)	195 (7.67)	26 (1.02)	25.5 (1)	4.5 (0.18)	4				
DN 80 EN PN 16	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	8				
DN 80 EN PN 40	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	19.5 (0.77)	4.5 (0.18)	8				
DN 80 EN PN 63	89 (3.5)	75 (2.95)	120 (4.72)	170 (6.7)	215 (8.46)	22 (0.86)	23.5 (0.92)	4.5 (0.18)	8				
DN 80 EN PN 100	89 (3.5)	75 (2.95)	120 (4.72)	180 (7.08)	230 (9.05)	26 (1.02)	31.5 (1.24)	4.5 (0.18)	8				


				Dimensio	ns mm. (in.)	for S26F	E Form D				
Size/Rating	diaphrag	m A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	H (dia)	I (dia)	L	N° of
	std. thickness	low thickness					(Note 2)				holes
DN 50 EN PN 16	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.59)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 40	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.71)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 63	60 (2.36)	58 (2.28)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.91)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 100	60 (2.36)	58 (2.28)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 80 EN PN 16	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 40	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 63	89 (3.5)	75 (2.95)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.92)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 100	89 (3.5)	75 (2.95)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	105 (4.13)	121 (4.76)	4 (0.16)	8

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

266DDH with barrel housing and direct mount seal S26Mx off-line flanged


266HDH / 266NDH with barrel housing and direct mount seal S26Mx off-line flanged

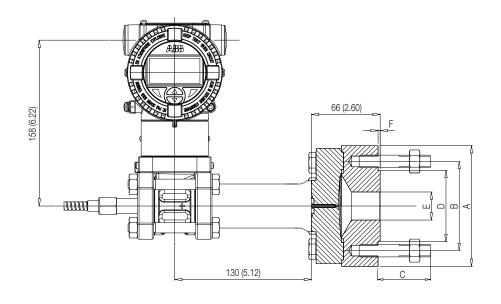

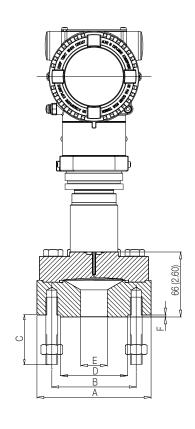


			Dimension	ns mm. (in.) for S26M	A and S26ME		
			C (4 studs)				
Size/Rating	A (dia)	B (dia)	Length	Thread	D (dia)	E (dia)	F
1/2 in. ASME CL 150	110 (4.33)	60.5 (2.38)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1/2 in. ASME CL 300	110 (4.33)	66.5 (2.62)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1 in. ASME CL 150	110 (4.33)	79.4 (3.12)	39 (1.53)	1/2 in. – 13 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 in. ASME CL 300	124 (4.88)	88.9 (3.5)	51 (2)	5/8 in. – 11 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 1/2 in. ASME CL 150	127 (5)	98.4 (3.87)	39 (1.53)	1/2 in. – 13 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
1 1/2 in. ASME CL 300	155 (6.1)	114.3 (4.5)	57 (2.24)	3/4 in. – 10 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
DN 25 PN 16-40	115 (4.52)	85 (3.34)	42 (1.65)	M12	68 (2.67)	28.5 (1.12)	2 (0.08)
DN 40 PN 16-40	150 (5.9)	110 (4.33)	48 (1.89)	M16	88 (3.46)	43.1 (1.69)	3 (0.12)


266DDH with barrel housing and direct mount seal S26TT off-line threaded flange

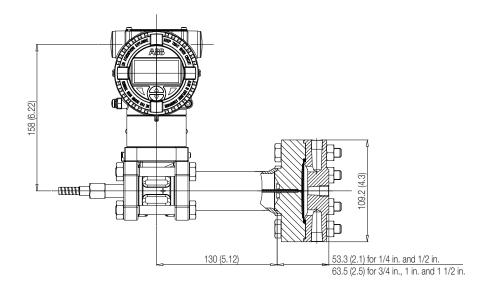


266HDH / 266NDH with barrel housing and direct mount seal S26TT off-line threaded flange

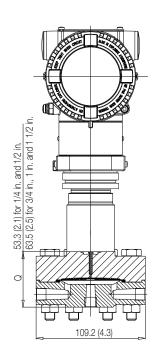


266HDH / 266NDH with barrel housing and direct mount seal S26JN in-line

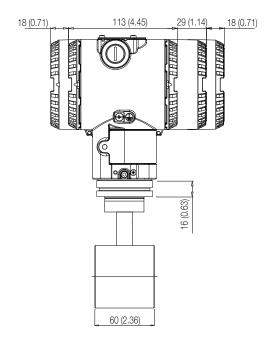

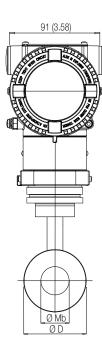


Dimensions mm. (in.) for S26JN						
Size/Rating	D (dia)	Mb (dia)				
1 in. / DN 25	63 (2.48)	28.5 (1.12)				
1 1/2 in. / DN 40	85 (3.35)	43 (1.69)				
2 in. / DN 50	95 (3.74)	54.5 (2.15)				
3 in. / DN 80	130 (5.12)	82.5 (3.25)				

266DDH with barrel housing and direct mount seal S26SS Triclamp

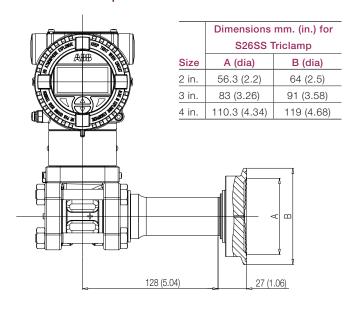

266HDH / 266NDH with barrel housing and direct mount seal S26SS Triclamp

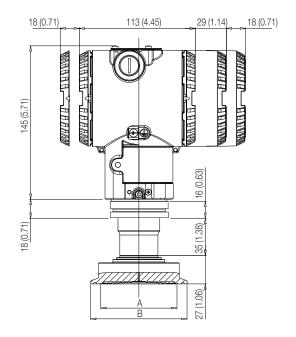



266DDH with barrel housing and direct mount seal S26SS Union Nut

266HDH / 266NDH with barrel housing and direct mount seal S26SS Union Nut

22 (0.87)

29 (1.14)

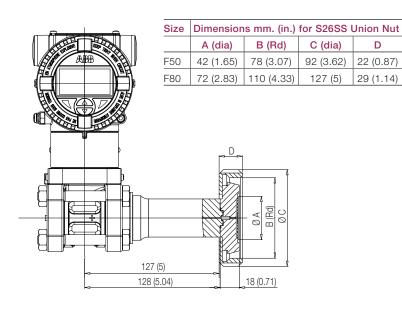


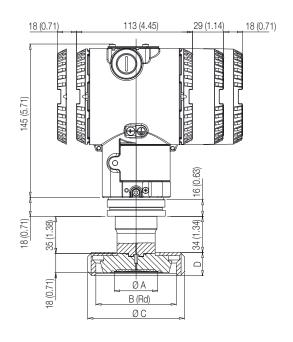

266DDH with barrel housing and direct mount seal S26SS Cherry Burrell

128 (5.04) G F E

266HDH / 266NDH with barrel housing and direct mount seal S26SS Cherry Burrell

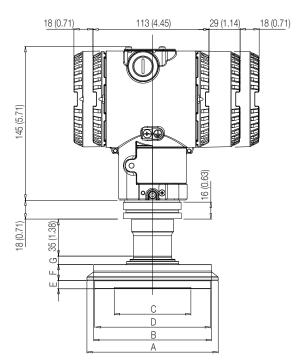


		Dimensions mm. (in.) for S26SS Cherry Burrell						
Size	A (dia)	B (dia)	C (dia)	D (dia)	Е	F	G	
2 in.	67 (2.64)	56 (2.2)	47.7 (1.88)	57 (2.24)	6.5 (0.26)	12.5 (0.49)	3 (0.12)	
3 in.	98.4 (3.87)	81 (3.19)	71 (2.80)	83.8 (3.3)	7.9 (0.31)	15 (0.59)	3 (0.12)	
4 in.	124 (4.88)	111.25 (4.38)	71 (2.80)	109.3 (4.3)	7.9 (0.31)	15 (0.59)	3 (0.12)	


266DDH with barrel housing and direct mount seal S26SS Sanitary flush

32 (1.26) 19 (0.75) 8 (0.31) for thin wall 13 (0.51) for thick wall Ø 75 (2.95) Ø 86 (3.39) Ø 118 (4.65) Ø 119 (4.69) Ø 152 (5.98) 128 (5.04) 22 (0.87) 163 (6.42)


266HDH / 266NDH with barrel housing and direct mount seal S26SS Sanitary flush

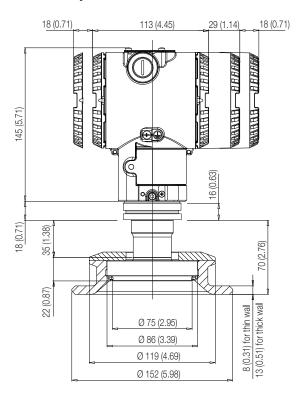


266HDH / 266NDH with barrel housing and direct mount seal S26SS beverage bolted

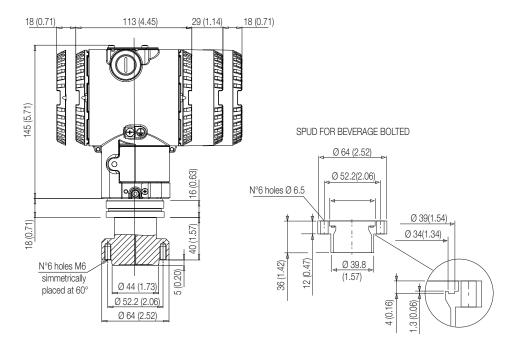

266DDH with barrel housing and direct mount seal S26SS Sanitary extended

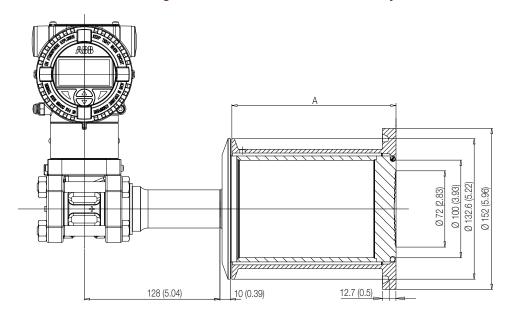



266HDH / 266NDH with barrel housing and direct mount seal S26SS Sanitary extended

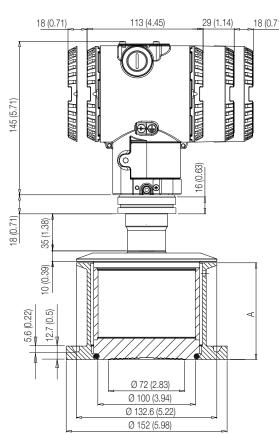


	Dimensions mm. (in.) for \$2655 Sanitary extended
Size	Α
2in	53.3 (2.1)
4in	104.1 (4.1)
6in	154.9 (6.1)

266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper NPT threaded connections

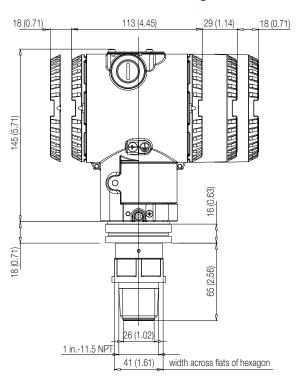


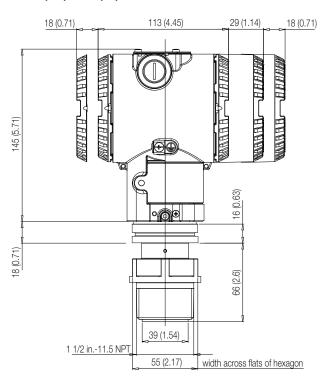


266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper Gas threaded connections

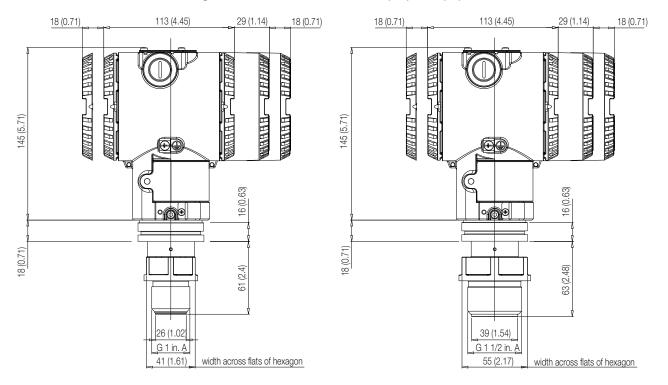


266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper sealing with gasket

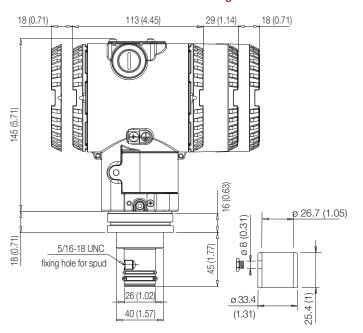


266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper ball valve connection

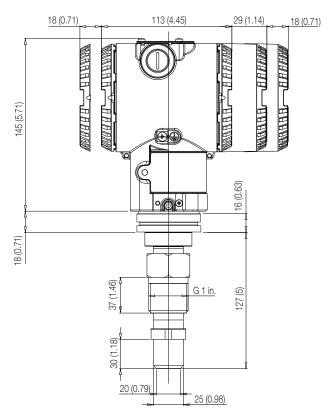


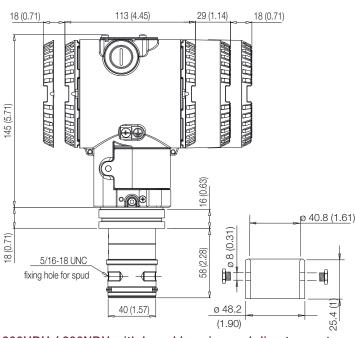


266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper to threaded spud

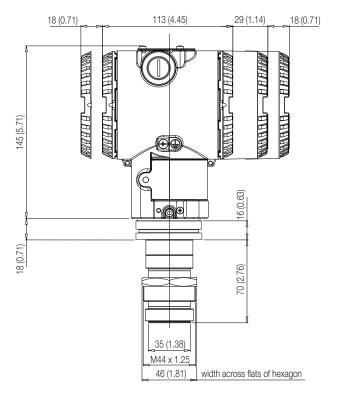

266HDH / 266NDH with barrel housing and direct mount seal S26VN saddle and socket

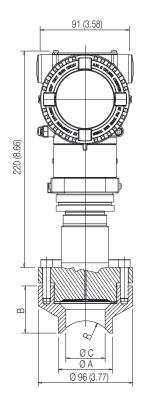

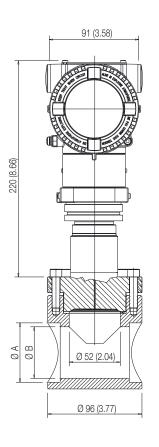


	Dimensions mm. (in.) for S2VN- saddle typ					
Fitting connection/ Size	A (dia)	В	C (dia)	R		
Saddle 2 in.	55 (2.17)	48 (1.89)	40 (1.57)	30		
Saddle 2 1/2 in.	76 (3.0)	45 (1.77)	52 (2.05)	45		
Saddle 3 in.	76 (3.0)	45 (1.77)	50 (1.97)	45		
Saddle 4 in.	76 (3.0)	41 (1.61)	50 (1.97)	57		
Saddle 5 in.	76 (3.0)	40 (1.57)	50 (1.97)	70		
Saddle 6 in.	76 (3.0)	36 (1.42)	50 (1.97)	85		

	Dimensions m	Dimensions mm. (in.) for S2VN- socket type					
Fitting connection/ Size	A (dia)	В	С				
Socket 1/2 in.	21.8 (0.86)	15.9 (0.63)	86 (3.39)				
Socket 3/4 in.	27 (1.06)	21.2 (0.83)	96 (3.78)				
Socket 1 in.	33.6 (1.32)	26.8 (1.06)	101 (3.98)				
Socket 1 1/2 in.	48.5 (1.91)	41 (1.61)	121 (4.76)				
Socket 2 in.	60.5 (2.38)	52.5 (2.07)	121 (4.76)				

Electrical connections

HART Version

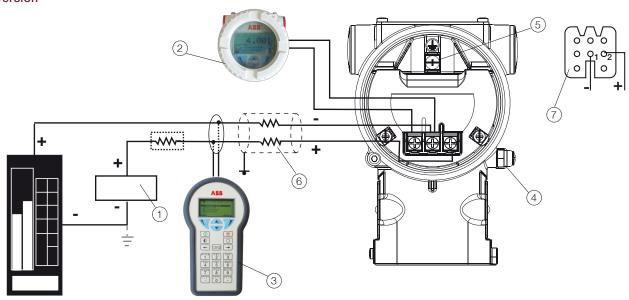

HART hand-held communicator may be connected at any wiring termination point in the loop, providing the minimum resistance is 250 ohm. If this is less than 250 ohm, additional resistance should be added to allow communications. Maximum voltage drop on external remote indicator is 0.7 V DC.

FIELDBUS Versions

7/8 in connector


M12 x 1 connector






PIN (male) IDENTIFICATION							
	FOUNDATION P						
	Fieldbus	PA					
1	DATA -	DATA +					
2	DATA +	GROUND					
3	SHIELD	DATA -					
4	GROUND	SHIELD					

CONNECTOR IS SUPPLIED LOOSE WITHOUT MATING FEMALE PLUG

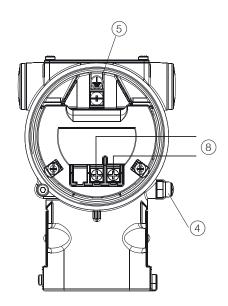

¹⁾ Power source | (2) Remote indicator | (3) Handheld communicator | (4) External ground termination point | (5) Internal ground termination point | (6) Line load | (7) Harting Han 8D socket insert for mating plug (supplied loose) | (8) Fieldbus line (polarity independent)

WirelessHART version

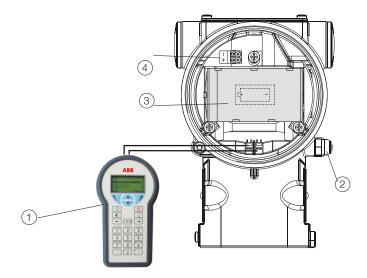

1 Handheld communicator | 2 External ground termination point | 3 Battery | 4 Fast connection for harvesting unit

Ordering information

BASIC ORDERING INFORMATION model 266DDH Differential Pressure Transmitter with direct mount seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1st to	6th characters		266DDH	x s	X	X	X	Х	X
Differential Pressure Tr	ansmitter with direct mou	ınt seal – BASE ACCURACY 0.06 %							
SENSOR - Span limits	- 7 th character						cont	inued	
0.8 and 16 kPa	8 and 160 mbar	3.2 and 64 inH2O		E		8	ee ne	xt pag	e
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O		F					
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O		Н					
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi		М					
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi		Р					
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi		Q					
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi		S					
Use code - 8th charact	ter			S					
Diaphragm material /	Fill fluid (wetted parts) -	9 th character							
AISI 316 L ss	Silicone oil	(one direct mount seal only to be quoted)		NACE	S				
Hastelloy® C-276	Silicone oil	(one direct mount seal only to be quoted)		NACE	K				
Monel 400®	Silicone oil	(one direct mount seal only to be quoted)		NACE	М				
Tantalum	Silicone oil	(one direct mount seal only to be quoted)		NACE	Т				
AISI 316 L ss	Inert fluid - Galden	(one direct mount seal only to be quoted)	(Note 1)	NACE	Α				
Hastelloy® C-276	Inert fluid - Galden	(one direct mount seal only to be quoted)	(Note 1)	NACE	F				
Monel 400®	Inert fluid - Galden	(one direct mount seal only to be quoted)	(Note 1)	NACE	С				
Tantalum	Inert fluid - Galden	(one direct mount seal only to be quoted)	(Note 1)	NACE	D				
AISI 316 L ss	Inert fluid - Halocarbon	(one direct mount seal only to be quoted)	(Note 1)	NACE	L				
Hastelloy® C-276	Inert fluid - Halocarbon	(one direct mount seal only to be quoted)	(Note 1)	NACE	Р				
Monel 400®	Inert fluid - Halocarbon	(one direct mount seal only to be quoted)	(Note 1)	NACE	4				
Tantalum	Inert fluid - Halocarbon	(one direct mount seal only to be quoted)	(Note 1)	NACE	5				
AISI 316 L ss	Silicone oil	(one direct mount seal and one remote to	be quoted)	NACE	R				
AISI 316 L ss	Inert fluid - Galden	(one direct mount seal and one remote to	be quoted) (Note 1)	NACE	2				
AISI 316 L ss	Inert fluid - Halocarbon	(one direct mount seal and one remote to	be quoted) (Note 1)	NACE	W				

BASIC ORDERING INFORMATION model 266DDH Dif	ferential Pressure	Transmitter	2 (6 6 D D H X S X	x x x	Х	X
Process flanges/adapters material and connection (v	vetted parts) - 10th	character					
AISI 316 L ss for two seals construction			(Note 2)	NACE	R		
AISI 316 L ss (Horizontal connection)	1/4 in. – 18 NPT-f	direct	(Note 3)	NACE	A		
AISI 316 L ss (Horizontal connection)	1/2 in. – 14 NPT-f	through adapter	(Note 3)	NACE	В		
Hastelloy® C-276 (Horizontal connection)	1/4 in. – 18 NPT-f	direct	(Notes 3, 4)	NACE	D		
Hastelloy® C-276 (Horizontal connection)	1/2 in. – 14 NPT-f	through adapter	(Notes 3, 4)	NACE	E		
Monel 400® (Horizontal connection)	1/4 in. – 18 NPT-f	direct	(Notes 3, 4)	NACE	G		
Monel 400® (Horizontal connection)	1/2 in. – 14 NPT-f	through adapter	(Notes 3, 4)	NACE	Н		
Bolts/Gasket (wetted parts) - 11th character							
AISI 316 ss (NACE) without gaskets for two seals const	truction- (MWP = 16	6 MPa)	(Note 2)	NACE	R		
AISI 316 ss without gaskets for two seals construction			(Note 2)		S		
AISI 316 ss	Viton [®]		(Note 3)		1		
AISI 316 ss	PTFE		(Notes 1, 3)		2		
AISI 316 ss (NACE) - (MWP = 16 MPa)	Viton [®]		(Note 3)	NACE	3		
AISI 316 ss (NACE) - (MWP = 16 MPa)	PTFE		(Notes 1, 3)	NACE	4		
Housing material and electrical connection - 12th cha	aracter						
Aluminium alloy (barrel version)	1/2 in. – 14 NPT				(Note 15)	Α	
Aluminium alloy (barrel version)	M20 x 1.5 (CM 20))	(TO BE USED for	WirelessHART)		В	
Aluminium alloy (barrel version)	Harting Han 8D co	nnector	(general purpose of	only)	(Notes 5, 15) E	
Aluminium alloy (barrel version)	Fieldbus connecto	r	(general purpose of	only)	(Notes 5, 15) G	
AISI 316 L ss (barrel version) (I2 or I3 required)	1/2 in 14 NPT				(Note 15)	S	
AISI 316 L ss (barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)		(TO BE USED for	WirelessHART)		Т	
AISI 316 L ss (barrel version) (I2 or I3 required)	Fieldbus connecto	r	(general purpose of	only)	(Notes 5, 15) Z	
AISI 316 L ss painted (barrel version) (I2 or I3 required)	1/2 in 14 NPT				(Note 15)	С	
AISI 316 L ss painted (barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)		(TO BE USED for	WirelessHART)		D	
AISI 316 L ss painted (barrel version) (I2 or I3 required)	Fieldbus connecto	r	(general purpose of	only)	(Note 15)	F	
Aluminium alloy (DIN version)	M20 x 1.5 (CM20)		(not Ex d or XP)		(Note 15)	J	
Aluminium alloy (DIN version)	Harting Han 8D co	nnector	(general purpose of	only)	(Notes 5, 15) K	
Aluminium alloy (DIN version)	Fieldbus connecto	r	(general purpose of	only)	(Notes 5, 15) W	,
Output/Additional options - 13th character							
HART and 4 to 20 mA - Standard functionality		No additional of	options		(Notes 6,	7)	L
HART and 4 to 20 mA - Standard functionality		Options reques	sted by "Additional	ordering code"	(Note 6)		7
HART and 4 to 20 mA - Advanced functionality (include	s option R1)	No additional of	options		(Notes 6,	7)	Н
HART and 4 to 20 mA - Advanced functionality (include	s option R1)	Options reques	sted by "Additional	ordering code"	(Note 6)		1
PROFIBUS PA (includes option R1)		No additional of	options		(Notes 5,	7)	Р
PROFIBUS PA (includes option R1)		Options reques	sted by "Additional	ordering code"	(Note 7)		2
FOUNDATION Fieldbus (includes option R1)		No additional of	options		(Notes 5,	7)	F
FOUNDATION Fieldbus (includes option R1)		Options reques	sted by "Additional	ordering code"	(Note 7)		3
HART and 4 to 20 mA Safety, certified to IEC 61508 (in	cludes option R1)	No additional of	options		(Notes 6,	7)	Т
HART and 4 to 20 mA Safety, certified to IEC 61508 (in	cludes option R1)	Options reques	sted by "Additional	ordering code"	(Note 6)		8
WirelessHART (includes option R1)		No additional of			(Note 14)		W
WirelessHART (includes option R1)		Options reques	sted by "Additional	ordering code"	(Note 14)		9

NOTE - Option R1 represents the external pushbuttons

ADDITIONAL ORDERING INFORMATION for model 266DDH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

					XX	ХХ
Drain/vent valve (m	aterial and position) (wetted p	oarts)				
AISI 316 L ss	on process axis	(Note 8)	NACE		V1	
AISI 316 L ss	on flange side top	(Note 8)	NACE		V2	
AISI 316 L ss	on flange side bottom	(Note 8)	NACE		V3	
Hastelloy® C-276	on process axis	(Note 9)	NACE		V4	
Hastelloy® C-276	on flange side top	(Note 9)	NACE		V5	
Hastelloy® C-276	on flange side bottom	(Note 9)	NACE		V6	
Monel 400®	on process axix	(Note 10)	NACE		V7	
Monel 400®	on flange side top	(Note 10)	NACE		V8	
Monel 400®	on flange side bottom	(Note 10)	NACE		V9	
Hazardous area cer	tifications					
ATEX Intrinsic Safety	y Ex ia			(Notes 6, 7)		E.
ATEX Explosion Pro	of Ex d			(Notes 6, 7, 11, 15)		Εź
ATEX Intrinsic Safet	y Ex ic			(Notes 6, 7, 15)		ΕC
Combined ATEX - Ir	ntrinsic Safety Ex ia, Explosion	Proof and Intrinsic Safety	Ex ic	(Notes 6, 7, 11, 15)		E٧
Combined ATEX - Ir	ntrinsic Safety Ex ia and Explos	ion Proof		(Notes 6, 7, 11, 15)		E
Combined ATEX, IE	CEx, FM Approvals (USA) and I	M Approvals (Canada)		(Notes 6, 7, 11, 15)		E١
FM Approvals (Cana	ada) approval			(Notes 6, 7, 11, 15)		Ε
FM Approvals (USA)) approval			(Notes 6, 7, 11, 15)		ΕŒ
FM Approvals (USA	and Canada) Intrinsically Safe			(Notes 6, 7)		E
FM Approvals (USA	and Canada) Explosion Proof,	Flameproof and Dust-ign	itionproof	(Notes 6, 7, 11, 15)		E
FM Approvals (USA	and Canada) Nonincendive and	d Energy Limited		(Notes 6, 7, 15)		EC
IECEx Intrinsic Safe	ty Ex ia			(Notes 6, 7)		Ε
IECEx Explosion Pro	oof Ex d			(Notes 6, 7, 11, 15)		E
IECEx Intrinsic Safe	ty Ex ic			(Notes 6, 7, 15)		EF
Combined IECEx - I	ntrinsic Safety Ex ia, Explosion	Proof and Intrinsic Safet	/ Ex ic	(Notes 6, 7, 11, 15)		Ε
Combined IECEx - I	ntrinsic Safety Ex ia and Explos	sion Proof		(Notes 6, 7, 11, 15)		Εŀ
NEPSI Intrinsic Safe	ety Ex ia			(Notes 6, 7, 15)		ΕY
NEPSI Explosion Pr	oof Ex d			(Notes 6, 7, 11, 15)		ΕZ
NEPSI Type "N"				(Notes 6, 7, 15)		ES
Combined NEPSI -	Intrinsic Safety Ex ia, Explosion	Proof and Type "N"		(Notes 6, 7, 11, 15)		EC
Combined NEPSI -	Intrinsic Safety Ex ia and Explo	sion Proof		(Notes 6, 7, 11, 15)		EF
Combined Intrinsic	Safety - ATEX, IECEx and FM A	pprovals (USA and Cana	da)	(Note 16)		EF

ADDITIONAL ORDERING INFORMATION for model 266DDH		XX	XX X	X
Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CO	DE Ex)	_		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 6, 7, 15)	W1		
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 6, 7, 11, 15)	W2		
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 6, 7, 11, 15)	WC		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 6, 7, 15)	W3		
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 6, 7, 11, 15)	W4		
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 6, 7, 11, 15)	WD		
Inmetro (Brazil) Ex ia	(Notes 6, 7, 15)	W5		
Inmetro (Brazil) Ex d	(Notes 6, 7, 11, 15)	W6		
Inmetro (Brazil) Ex nL	(Notes 6, 7, 15)	W7		
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type "N"	(Notes 6, 7, 11, 15)	W8		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 6, 7, 15)	WF		
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 6, 7, 11, 15)	WG		
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 6, 7, 11, 15)	WH		
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 6, 7, 13, 15)	WM		
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 6, 7, 11, 13, 15)	WN		
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 6, 7, 11, 13, 15)	WP		
ntegral LCD				
Digital LCD integral display with integrated keypad	(Note 13)	I	L1	
Digital LCD integral display with TTG (Through-The-Glass) activated keypad	(Note 13)	- 1	L5	
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 18)	- 1	LS	
External non intrusive Z, S and WP pushbuttons				
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)			R	11
Surge				
Surge/Transient Protector	(Note 15)			

ADDITIONAL ORDERING INFORMATION for model 266DDH	XX	XX	XX	XX)
Operating manual (multiple selection allowed)					
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)	M1				
Italian (ONLY FOR HART VERSIONS)	M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)	M3				
French (ONLY FOR HART VERSIONS)	M4				
English	M5				
Chinese (ONLY FOR HART VERSIONS)	M6				
Swedish (ONLY FOR HART VERSIONS)	M7				
Polish (ONLY FOR HART VERSIONS)	M9				
Portuguese (ONLY FOR HART VERSIONS)	MA				
Russian (ONLY FOR HART VERSIONS)	MB				
Dutch (ONLY FOR HART VERSIONS)	MD				
Danish (ONLY FOR HART VERSIONS)	MF				
Japanese (ONLY FOR HART VERSIONS)	MJ				
Romenian (ONLY FOR HART VERSIONS)	MR				
Turkish (ONLY FOR HART VERSIONS)	MT				
Plates language		_			
German		T1			
Italian		T2			
Spanish		ТЗ			
French		T4			
Additional tag plate			J		
Supplemental wired-on stainless steel plate			11		
Tag and certification stainless steel plates and laser printing of tag			12		
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag			13		
Configuration				J	
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F				N2	
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F				N3	
Standard - Pressure = inH2O/ psi at 20 °C; Temperature = deg. C				N4	
Standard - Pressure = inH2O/ psi at 4 °C; Temperature = deg. C				N5	
Custom				N6	
Certificates (multiple selection allowed)					_
Inspection certificate EN 10204–3.1 of calibration (9-point)					
Inspection certificate EN 10204–3.1 of helium leakage test of the sensor module					
Inspection certificate EN 10204–3.1 of the pressure test					
Certificate of compliance with the order EN 10204–2.1 of instrument design					
Printed record of configured data of transmitter					
PMI test of wetted parts					

ADDITIONAL ORDERING INFORMA	TION FOR MODEL 266DDH			XX	XX	XX	XX
Approvals							
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y1			
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y2			
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y4			
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y5			
DNV approval (PENDING)		(Notes 13	, 15)		YA		
Approval for Custody transfer (PEND	NING)				YC		
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")	(Notes 13	, 15, 17,	19)	ΥE		
Material traceability							
Certificate of compliance with the or	der EN 10204-2.1 of process wetted parts					H1	
Inspection certificate EN 10204-3.1	of process wetted parts					НЗ	
Test report EN 10204-2.2 of pressur	re bearing and process wetted parts					H4	
Connector							
Fieldbus 7/8 in. (Recommended for I	FOUNDATION Fieldbus) - (supplied loose without mating female plug)		(Note:	s 7,	12, 1	5)	U1
Fieldbus M12x1 (Recommended for	PROFIBUS PA) - (supplied loose without mating female plug)		(Note:	s 7,	12, 1	5)	U2
Harting Han 8D - straight entry - (su	pplied loose)		(Note:	s 6,	12, 1	5)	U3
Harting Han 8D - angle entry - (supp	olied loose)		(Note:	s 6,	12, 1	5)	U4

One certified stainless steel plug (supplied loose with thread according to housing entries)

Z1

Note 1: Suitable for oxygen service

Note 2: Not available with low side diaphragm code S, K, M, T, A, F, C, D, L, P, 4, 5

Note 3: Not available with low side diaphragm code R, 2, W

Note 4: Not available with diaphragm material/fill fluid code S, A, L

Nota 5: Select type in additional ordering code

Note 6: Not available with Housing code G, Z, W, F

Note 7: Not available with Housing code E, K

Note 8: Not available with Process flanges/adapters code D, E, G, H, R

Note 9: Not available with Process flanges/adapters code A, B, G, H, R Note 10: Not available with Process flanges/adapters code A, B, D, E, R

Note 11: Not available with Housing code J, K, W

Note 12: Not available with Housing code A, B, S, T, J

Note 13: Not available with Output code 7

Note 14: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 15: Not available with Output code 9

Note 16: Not available with Output code 1, 2, 3, 7, 8

Note 17: Not available with Output code 2, 3

Standard delivery items (can be differently specified by additional ordering code)

- Adapter supplied loose
- Plug on axis (no drain/vent valve)
- General purpose (no electrical certification)
- No display, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

BASIC ORDERING INFORMATION model 266HDH Gauge Pressure Transmitter with direct mount seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1st to 6th	characters		266HDH X	Х	Х	Х
Gauge Pressure Transmitte	er with direct mount seal - B	ASE ACCURACY 0.06 %				
SENSOR - Span limits - 7th	character					
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O	F			
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O	Н			
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi	M			
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi	Р			
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi	Q			
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi	S			
1400 and 70000 kPa	14 and 700 bar	203 and 10150 psi	W			
10500 and 105000 kPa	105 and 1050 bar	1522 and 15225 psi	Z			
Diaphragm material / Fill f	luid - 8 th character					
AISI 316 L ss	Silicone oil		(Note 9)	R		
AISI 316 L ss	Inert fluid - Galden		(Notes 1, 8, 9)	2		
AISI 316 L ss	Inert fluid - Halocarbon		(Notes 1, 8, 9)	W		
Inconel 718		No filling	(Notes 8, 10)	U		
Process connection (wette	ed parts) - 9th character					
Direct mount seal		(one seal to be quoted separately)			М	
Housing material and elec	trical connection - 10th cha	aracter				
Aluminium alloy (barrel vers	sion)	1/2 in. – 14 NPT		(Note 1	12)	Α
Aluminium alloy (barrel vers	sion)	M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)			В
Aluminium alloy (barrel vers	sion)	Harting Han 8D connector	(general purpose only)	(Note 2	2, 12)	Е
Aluminium alloy (barrel vers	sion)	Fieldbus connector	(general purpose only)	(Note 2	2, 12)	G
AISI 316 L ss (barrel version	n) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 1	12)	S
AISI 316 L ss (barrel version	n) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)			Т
AISI 316 L ss (barrel version	n) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Note 2	2, 12)	Z
AISI 316 L ss painted (barr	el version) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 1	12)	С
AISI 316 L ss painted (barr	el version) (12 or 13 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)			D
AISI 316 L ss painted (barr	el version) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Note 2	2, 12)	F
Aluminium alloy (DIN version	on)	M20 x 1.5 (CM20)	(not Ex d or XP)	(Note 1	12)	J
Aluminium alloy (DIN version	on)	Harting Han 8D connector	(general purpose only)	(Note 2	2, 12)	K
Aluminium alloy (DIN version	on)	Fieldbus connector	(general purpose only)	(Note 2	2, 12)	W

BASIC ORDERING INFORMATION model 266HDH Gauge Pressure Tra	insmitter	266HDHXXXX		
Output/Additional options - 11th character			_	
HART and 4 to 20 mA - Standard functionality	No additional options	(Notes 3, 4, 9)	L	
HART and 4 to 20 mA - Standard functionality	Options requested by "Additional ordering code"	(Note 3, 9)	7	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	No additional options	(Notes 3, 4)	Н	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	Options requested by "Additional ordering code"	(Note 3)	1	
PROFIBUS PA (includes option R1)	No additional options	(Notes 3, 4)	Р	
PROFIBUS PA (includes option R1)	Options requested by "Additional ordering code"	(Note 4)	2	
FOUNDATION Fieldbus (includes option R1)	No additional options	(Notes 3, 4)	F	
FOUNDATION Fieldbus (includes option R1)	Options requested by "Additional ordering code"	(Note 4)	3	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	No additional options	(Notes 3, 4)	Т	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	Options requested by "Additional ordering code"	" (Note 3)	8	
WirelessHART (includes option R1)	No additional options	(Notes 9, 11)	W	
WirelessHART (includes option R1)	Options requested by "Additional ordering code"	" (Notes 9, 11)	9	

NOTE - Option R1 represents the external pushbuttons

ADDITIONAL ORDERING INFORMATION for model 266HDH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

		XX
Hazardous area certifications		
ATEX Intrinsic Safety Ex ia	(Notes 3, 4)	E1
ATEX Explosion Proof Ex d	(Notes 3, 4, 5, 12)	E2
ATEX Intrinsic Safety Ex ic	(Notes 3, 4, 12)	E3
Combined ATEX - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 12)	EW
Combined ATEX - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 12)	E7
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes 3, 4, 5, 12)	EN
FM Approvals (Canada) approval	(Notes 3, 4, 5, 12)	E4
FM Approvals (USA) approval	(Notes 3, 4, 5, 12)	E6
FM Approvals (USA and Canada) Intrinsically Safe	(Notes 3, 4)	EA
FM Approvals (USA and Canada) Explosion Proof, Flameproof and Dust-ignitionproof	(Notes 3, 4, 5, 12)	EB
FM Approvals (USA and Canada) Nonincendive and Energy Limited	(Notes 3, 4, 12)	EC
IECEx Intrinsic Safety Ex ia	(Notes 3, 4)	E8
IECEx Explosion Proof Ex d	(Notes 3, 4, 5, 12)	E9
IECEx Intrinsic Safety Ex ic	(Notes 3, 4, 12)	ER
Combined IECEx - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 12)	EI
Combined IECEx - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 12)	EH
NEPSI Intrinsic Safety Ex ia	(Notes 3, 4, 8, 12)	EY
NEPSI Explosion Proof Ex d	(Notes 3, 4, 5, 8, 12)	EZ
NEPSI Type "N"	(Notes 3, 4, 8, 12)	ES
Combined NEPSI - Intrinsic Safety Ex ia, Explosion Proof and Type "N"	(Notes 3, 4, 5, 8, 12)	EQ
Combined NEPSI - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 8, 12)	EP
Combined Intrinsic Safety - ATEX, IECEx and FM Approvals (USA and Canada)	(Notes 8, 13)	EF
Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 3, 4, 12)	W1
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 3, 4, 5, 12)	W2
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 3, 4, 5, 12)	WC
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 3, 4, 12)	W3
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 3, 4, 5, 12)	W4
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 3, 4, 5, 12)	WD
Inmetro (Brazil) Ex ia	(Notes 3, 4, 12)	W5
Inmetro (Brazil) Ex d	(Notes 3, 4, 5, 12)	W6
Inmetro (Brazil) Ex nL	(Notes 3, 4, 12)	W7
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type "N"	(Notes 3, 4, 5, 12)	W8
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 3, 4, 12)	WF
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 3, 4, 5, 12)	WG
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 3, 4, 5, 12)	WH
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 3, 4, 7, 8, 12)	WM
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 3, 4, 5, 7, 8, 12)	
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 3, 4, 5, 7, 8, 12	

ADDITIONAL ORDERING INFORMATION for model 266HDH		XX							
ntegral LCD									
Digital LCD integral display	(Note 7)	L1							
TTG (Through-The-Glass) digital LCD controlled display	(Note 7)	L5							
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 15)	LS							
External non intrusive Z, S and WP pushbuttons			-						
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)			R1						
Surge				•					
Surge/Transient Protector	(Note 12)			S2					
Operating manual (multiple selection allowed)					-				
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)					M1				
Italian (ONLY FOR HART VERSIONS)					M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)					МЗ				
French (ONLY FOR HART VERSIONS)					M4				
English					M5				
Chinese (ONLY FOR HART VERSIONS)					M6				
Swedish (ONLY FOR HART VERSIONS)					M7				
Polish (ONLY FOR HART VERSIONS)					M9				
Portuguese (ONLY FOR HART VERSIONS)					MA				
Russian (ONLY FOR HART VERSIONS)					MB				
Dutch (ONLY FOR HART VERSIONS)					MD				
Danish (ONLY FOR HART VERSIONS)					MF				
Japanese (ONLY FOR HART VERSIONS)					MJ				
Romenian (ONLY FOR HART VERSIONS)					MR				
Turkish (ONLY FOR HART VERSIONS)					МТ				
Plates language						J			
German						T1			
Italian						T2			
Spanish						ТЗ			
French						T4			
Additional tag plate									
Supplemental wired-on stainless steel plate							11		
Tag and certification stainless steel plates and laser printing of tag							12		
Tag, certification and supplemental wired-on stainless steel plates and laser printing	of tag						13		
Configuration									
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F								N2	
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F								N3	
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C								N4	
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C								N5	
Custom								N6	
Certificates (multiple selection allowed)									J
Inspection certificate EN 10204–3.1 of calibration (9-point)									C
									С
Inspection certificate EN 10204–3.1 of the pressure test									
Inspection certificate EN 10204–3.1 of the pressure test Certificate of compliance with the order EN 10204–2.1 of instrument design.									()
Inspection certificate EN 10204–3.1 of the pressure test Certificate of compliance with the order EN 10204–2.1 of instrument design Printed record of configured data of transmitter									C

ADDITIONAL ORDERING INFORMA	TION FOR MODEL 266HDH	X	(XX	XX	XX
Approvals					
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICA	ATION) Y			
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICA	ATION) Y2	2		
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICA	ATION) Y	ı		
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICA	ATION) Y	5		
DNV approval (PENDING)		(Notes 7, 8, 9, 12)	YA		
Approval for Custody transfer (PEND	NING)		YC		
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")	(Notes 7, 8, 9, 12, 14, 16	YE		
Material traceability					
Certificate of compliance with the or	der EN 10204-2.1 of process wetted parts			H1	
Inspection certificate EN 10204-3.1	of process wetted parts			НЗ	
Test report EN 10204-2.2 of pressur	e bearing and process wetted parts			H4	
Connector					
Fieldbus 7/8 in. (Recommended for	FOUNDATION Fieldbus) - (supplied loose without mating female	plug) (Notes 4	, 6, 12	2)	U1
Fieldbus M12x1 (Recommended for	PROFIBUS PA) - (supplied loose without mating female plug)	(Notes 4	, 6, 12	2)	U2
Harting Han 8D - straight entry - (su	pplied loose)	(Notes 3	8, 6, 12	2)	U3
Harting Han 8D - angle entry - (supp	olied loose)	(Notes 3	8, 6, 12	2)	U4

Electrical connection plug

One certified stainless steel plug (supplied loose with thread according to housing entries)

Ζ1

Note 1: Suitable for oxygen service

Nota 2: Select type in additional ordering code

Note 3: Not available with Housing code G, Z, W, F

Note 4: Not available with Housing code E, K Note 5: Not available with Housing code J, K, W

Note 6: Not available with Housing code A, B, S, T, J

Note 7: Not available with Output code 7

Note 8: Not available with Sensor code W Note 9: Not available with Sensor code Z

Note 10: Not available with Sensor code F to S

Note 11: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 12: Not available with Output code 9

Note 13: Not available with Output code 1, 2, 3, 7, 8

Note 14: Not available with Output code 2, 3

Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

BASIC ORDERING INFORMATION model 266NDH Absolute Pressure Transmitter with direct mount seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1st to 6th		Decity one of more	Codes for each ti	2 6 6 N D H	X X	X	X	X
	ter with direct mount seal -	BASE ACCURACY O OF	6 %	2001011	^	^		
SENSOR - Span limits - 7		27.027.0001.7.01 0.00						
0.67 and 40 kPa	6.7 and 400 mbar	5 and 300 mmHg			F			
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O)		Н			
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi			М			
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi			Р			
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi			Q			
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi			S			
Diaphragm material / Fill	fluid - 8th character	· ·						
AISI 316 L ss	Silicone oil				R			
AISI 316 L ss	Inert fluid - Galden			(Note 1)	2			
AISI 316 L ss	Inert fluid - Halocarbon			(Note 1)	w			
Process connection (wet	ted parts) - 9th character							
Direct mount seal	• •	(one seal to be quote	ed separately)			М		
Housing material and ele	ctrical connection - 10th c	haracter						
Aluminium alloy (barrel ve	rsion)	1/2 in. – 14 NPT			(Note 9	9)	Α	
Aluminium alloy (barrel ve	rsion)	M20 x 1.5 (CM 20)		(TO BE USED for Wireles	ssHART)		В	
Aluminium alloy (barrel ve	rsion)	Harting Han 8D conr	nector	(general purpose only)	(Note 2	2, 9)	Ε	
Aluminium alloy (barrel ve	rsion)	Fieldbus connector		(general purpose only)	(Note 2	2, 9)	G	
AISI 316 L ss (barrel versi	ion) (I2 or I3 required)	1/2 in. – 14 NPT			(Note 9	9)	S	
AISI 316 L ss (barrel versi	ion) (I2 or I3 required)	M20 x 1.5 (CM20)		(TO BE USED for Wireles	ssHART)		Т	
AISI 316 L ss (barrel versi	ion) (I2 or I3 required)	Fieldbus connector		(general purpose only)	(Note 2	2, 9)	Z	
AISI 316 L ss painted (ba	rrel version) (12 or 13 required	d) 1/2 in. – 14 NPT			(Note 9	9)	С	
AISI 316 L ss painted (ba	rrel version) (12 or 13 required	d) M20 x 1.5 (CM20)		(TO BE USED for Wireles	ssHART)		D	
AISI 316 L ss painted (ba	rrel version) (12 or 13 required	d) Fieldbus connector		(general purpose only)	(Note 2	2, 9)	F	
Aluminium alloy (DIN vers	ion)	M20 x 1.5 (CM20)		(not Ex d or XP)	(Note 9	9)	J	
Aluminium alloy (DIN vers	ion)	Harting Han 8D conr	nector	(general purpose only)	(Note 2	2, 9)	K	
Aluminium alloy (DIN vers	ion)	Fieldbus connector		(general purpose only)	(Note 2	2, 9)	W	
Output/Additional option	s - 11 th character							
HART and 4 to 20 mA - S	Standard functionality		No additional option	ons	(Notes	3, 4)		L
HART and 4 to 20 mA - S	Standard functionality		Options requested	by "Additional ordering co	ode" (Note (3)		7
HART and 4 to 20 mA - A	Advanced functionality (included)	des option R1)	No additional option	ns	(Notes	3, 4)		Н
HART and 4 to 20 mA - A	Advanced functionality (included)	des option R1)	Options requested	by "Additional ordering co	ode" (Note 3	3)		1
PROFIBUS PA (includes of	option R1)		No additional option	ons	(Notes	3, 4)		Ρ
PROFIBUS PA (includes of	option R1)		Options requested	by "Additional ordering co	ode" (Note	4)		2
FOUNDATION Fieldbus (in	ncludes option R1)		No additional option	ons	(Notes	3, 4)		F
FOUNDATION Fieldbus (in	ncludes option R1)		Options requested	by "Additional ordering co	ode" (Note	4)		3
HART and 4 to 20 mA Sa	fety, certified to IEC 61508 (includes option R1)	No additional option	ons	(Notes	3, 4)		Т
HART and 4 to 20 mA Sa	fety, certified to IEC 61508 (includes option R1)	Options requested	by "Additional ordering co	ode" (Note 3	3)		8
WirelessHART (includes of	option R1)		No additional option	ons	(Note 8	8)		W
WirelessHART (includes of	pption R1)		Options requested	by "Additional ordering co	ode" (Note 8	8)		9

NOTE - Option R1 represents the external pushbuttons

ADDITIONAL ORDERING INFORMATION for model 266NDH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

		XX
Hazardous area certifications		
ATEX Intrinsic Safety Ex ia	(Notes 3, 4)	E1
ATEX Explosion Proof Ex d	(Notes 3, 4, 5, 9)	E2
ATEX Intrinsic Safety Ex ic	(Notes 3, 4, 9)	E3
Combined ATEX - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 9)	EW
Combined ATEX - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	E7
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes 3, 4, 5, 9)	EN
FM Approvals (Canada) approval	(Notes 3, 4, 5, 9)	E4
FM Approvals (USA) approval	(Notes 3, 4, 5, 9)	E6
FM Approvals (USA and Canada) Intrinsically Safe	(Notes 3, 4)	EA
FM Approvals (USA and Canada) Explosion Proof, Flameproof and Dust-ignitionproof	(Notes 3, 4, 5, 9)	EB
FM Approvals (USA and Canada) Nonincendive and Energy Limited	(Notes 3, 4, 9)	EC
IECEx Intrinsic Safety Ex ia	(Notes 3, 4)	E8
IECEx Explosion Proof Ex d	(Notes 3, 4, 5, 9)	E9
IECEx Intrinsic Safety Ex ic	(Notes 3, 4, 9)	ER
Combined IECEx - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 9)	El
Combined IECEx - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	EH
NEPSI Intrinsic Safety Ex ia	(Notes 3, 4, 9)	EY
NEPSI Explosion Proof Ex d	(Notes 3, 4, 5, 9)	EZ
NEPSI Type "N"	(Notes 3, 4, 9)	ES
Combined NEPSI - Intrinsic Safety Ex ia, Explosion Proof and Type "N"	(Notes 3, 4, 5, 9)	EQ
Combined NEPSI - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	EP
Combined Intrinsic Safety - ATEX, IECEx and FM Approvals (USA and Canada)	(Note 10)	EF
Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 3, 4, 9)	W1
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 3, 4, 5, 9)	W2
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 3, 4, 5, 9)	WC
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 3, 4, 9)	W3
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 3, 4, 5, 9)	W4
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 3, 4, 5, 9)	WD
Inmetro (Brazil) Ex ia	(Notes 3, 4, 9)	W5
Inmetro (Brazil) Ex d	(Notes 3, 4, 5, 9)	W6
Inmetro (Brazil) Ex nL	(Notes 3, 4, 9)	W7
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type "N"	(Notes 3, 4, 5, 9)	W8
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 3, 4, 9)	WF
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 3, 4, 5, 9)	WG
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 3, 4, 5, 9)	WH
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 3, 4, 7, 9)	WM
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 3, 4, 5, 7, 9)	WN
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 3, 4, 5, 7, 9)	WP

ADDITIONAL ORDERING INFORMATION for model 266NDH		XX							
Integral LCD									
Digital LCD integral display	(Note 7)	L1							
TTG (Through-The-Glass) digital LCD controlled display	(Note 7)	L5							
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 12)	LS							
External non intrusive Z, S and WP pushbuttons									
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7))		R1						
Surge				,					
Surge/Transient Protector	(Note 9)			S2					
Operating manual (multiple selection allowed)									
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)					M1				
Italian (ONLY FOR HART VERSIONS)					M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)					МЗ				
French (ONLY FOR HART VERSIONS)					M4				
English					M5				
Chinese (ONLY FOR HART VERSIONS)					M6				
Swedish (ONLY FOR HART VERSIONS)					M7				
Polish (ONLY FOR HART VERSIONS)					M9				
Portuguese (ONLY FOR HART VERSIONS)					MA				
Russian (ONLY FOR HART VERSIONS)					MB				
Dutch (ONLY FOR HART VERSIONS)					MD				
Danish (ONLY FOR HART VERSIONS)					MF				
Japanese (ONLY FOR HART VERSIONS)					MJ				
Romenian (ONLY FOR HART VERSIONS)					MR				
Turkish (ONLY FOR HART VERSIONS)					МТ				
Plates language						J			
German						T1			
Italian						T2			
Spanish						ТЗ			
French						T4			
Additional tag plate							J		
Supplemental wired-on stainless steel plate							11		
Tag and certification stainless steel plates and laser printing of tag							12		
Tag, certification and supplemental wired-on stainless steel plates and laser printing	of tag						13		
Configuration								'	
Standard - Pressure = inH2O/ psi at 68 °F; Temperature = deg. F								N2	
Standard - Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F								N3	
Standard - Pressure = inH2O/ psi at 20 °C; Temperature = deg. C								N4	
Standard - Pressure = inH2O/ psi at 4 °C; Temperature = deg. C								N5	
Custom								N6	
Certificates (multiple selection allowed)									ı
Inspection certificate EN 10204–3.1 of calibration (9-point)									C.
Inspection certificate EN 10204–3.1 of the pressure test									C!
Certificate of compliance with the order EN 10204–2.1 of instrument design									C
Printed record of configured data of transmitter									CO
PMI test of wetted parts									СТ

ADDITIONAL ORDERING INFORMA	TION FOR MODEL 266NDH		XX	XX	XX	XX
Approvals						
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICAT	ION)	Y1			
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICAT	ION)	Y2			
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICAT	ION)	Y4			
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICAT	ION)	Y5			
DNV approval (PENDING)		(Notes 7, 9)	,	ΥA		
Approval for Custody transfer (PEND	DING)		`	YC		
Conformity to NAMUR NE 021 (2004	4) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")	(Notes 7, 9, 11, 13)	,	ΥE		
Material traceability						
Certificate of compliance with the or	der EN 10204-2.1 of process wetted parts				H1	
Inspection certificate EN 10204-3.1	of process wetted parts				НЗ	
Test report EN 10204-2.2 of pressur	re bearing and process wetted parts				H4	
Connector						
Fieldbus 7/8 in. (Recommended for	FOUNDATION Fieldbus) - (supplied loose without mating female plu	ıg) (N	lotes 4, 6	, 9)		U1
Fieldbus M12x1 (Recommended for	PROFIBUS PA) - (supplied loose without mating female plug)	(N	lotes 4, 6	, 9)		U2
`				٥)		U3
Harting Han 8D - straight entry - (su	pplied loose)	(N	lotes 3, 6	, 9)		00

Electrical connection plug

One certified stainless steel plug (supplied loose with thread according to housing entries)

Z1

Note 1: Suitable for oxygen service

Nota 2: Select type in additional ordering code

Note 3: Not available with Housing code G, Z, W, F

Note 4: Not available with Housing code E, K Note 5: Not available with Housing code J, K, W

Note 6: Not available with Housing code A, B, S, T, J

Note 7: Not available with Output code 7

Note 8: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 9: Not available with Output code 9

Note 10: Not available with Output code 1, 2, 3, 7, 8

Note 11: Not available with Output code 2, 3

Note 12: Not available with Hazardous area certification code EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

IMPORTANT REMARK FOR ALL MODELS

THE SELECTION OF SUITABLE WETTED PARTS AND FILLING FLUID FOR COMPATIBILITY WITH THE PROCESS MEDIA IS A CUSTOMER'S RESPONSIBILITY, IF NOT OTHERWISE NOTIFIED BEFORE MANUFACTURING.

NACE COMPLIANCE INFORMATION

- (1) The materials of constructions comply with metallurgical recommendations of NACE MR0175/ISO 15156 for sour oil field production environments. As specific environmental limits may apply to certain materials, please consult latest standard for further details. AISI 316/316 L, Hastelloy C-276, Monel 400 also conform to NACE MR0103 for sour refining environments.
- (2) NACE MR-01-75 addresses bolting requirements in two classes:
 - Exposed bolts: bolts directly exposed to the sour environment or buried, incapsulated or anyway not exposed to atmosphere
 - Non exposed bolts: the bolting must not be directly exposed to sour environments and must be directly exposed to the atmosphere at all times.

266DDH bolting identified by "NACE" are in compliance with requirements of NACE MR0175 when considered "exposed bolting".

BASIC ORDERING INFORMATION model S26RA Rotating flange diaphragm seals (flush and extended) to ASME B16.5

Select one character or set of characters from each category and specify complete catalog number. BASE MODEL - 1st to 5th characters S 2 6 R A Х XX Х XX Χ Χ Х Rotating flange diaphragm seal (Raised face flush and extended) to ASME B16.5 Transmitter Side of Connection - 6th character continued High pressure side Н see next page Low pressure side Mounting Flange Rating / Size - 7th and 8th characters ASME CL 150 / 2 in. Ε1 ASME CL 300 / 2 in. E2 ASME CL 600 / 2 in. E3 ASME CL 900-1500 / 2 in. E5 ASME CL 150 / 3 in. G1 ASME CL 300 / 3 in. G2 ASME CL 600 / 3 in. G3 ASME CL 900 / 3 in. G4 ASME CL 1500 / 3 in. G5 ASME CL 150 / 4 in. H1 ASME CL 300 / 4 in. H2 Mounting Flange Material - 9th character Carbon steel С AISI 316 ss S Extensions Length and Material - 10th character Flush 50 mm (2 in.) AISI 316 L ss (Note 1) 50 mm (2 in.) Hastellov C-276 (Note 1) 2 100 mm (4 in.) AISI 316 L ss (Note 1) 3 Hastelloy C-276 4 100 mm (4 in.) (Note 1) 150 mm (6 in.) AISI 316 L ss 5 (Note 1) 150 mm (6 in.) Hastelloy C-276 (Note 1) 6 Diaphragm Material - 11th and 12th characters NACE SM AISI 316 L ss (Note 2) AISI 316 L ss - Low thickness (not for extended diaphragm) (Note 3) NACE SL Hastelloy C-276 **NACE** НМ Hastelloy C-276 - Low thickness (not for extended diaphragm) NACE (Note 3) HL NACE MM Hastelloy C-2000 (not for extended diaphragm) (Note 3) Hastelloy C-2000 diaphragm and body (not for extended diaphragm) (Note 3) NACE ZM Inconel 625 (not for extended diaphragm) (Note 3) NACE LM Tantalum (not for extended diaphragm) TM (Note 3) AISI 316 L ss gold plated (not for extended diaphragm) (Note 3) NACE NM AISI 316 L ss with PFA anti-stick coating NACE (Note 2) KM NACE Hastelloy C-276 with PFA anti-stick coating ΥM AISI 316 L ss with PFA coating anti-corrosion and anti-stick NACE WM (Note 2) Diaflex (AISI with anti-abrasion treatment) (Note 2) NACE FM Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm) (Note 3) **NACE** ΕM

(Note 3)

NACE

GM

Monel (not for extended diaphragm)

BASIC ORDERING INFORMATION mo	del S26RA	S 2 6 R A X XX X X XX	Х	X	Х	X	Х	X	Х
Seal Surface Finish - 13th character									
Serrated		(Note 4)	1				C	ontinue	ed
Smooth		(Note 15)	2				see	next p	age
Capillary Protection - 14th character				,					
AISI 316 L ss armour				Α					
AISI 316 L ss armour with PVC protection	ive cover			В					
Extension tube for direct mount seal		(Note 5)		Ν					
Capillary Length m (Feet) - 15th charac	ter								
Direct-mount construction		(Note 6)			1				
1 (3)		(Note 7)			Α				
1.5 (5)		(Note 7)			В				
2 (7)		(Note 7)			С				
2.5 (8)		(Note 7)			D				
3 (10)		(Note 7)			Ε				
3.5 (12)		(Note 7)			F				
4 (13)		(Note 7)			G				
4.5 (15)		(Note 7)			Н				
5 (17)		(Note 7)			J				
5.5 (18)		(Note 7)			K				
6 (20)		(Note 7)			L				
6.5 (22)		(Note 7)			Μ				
7 (23.5)		(Note 7)			Ν				
7.5 (25)		(Note 7)			Р				
8 (27)		(Note 7)			Q				
9 (30)		(Note 7)			R				
10 (33)		(Note 7)			S				
12 (40)		(Note 7)			Т				
14 (47)		(Note 7)			U				
16 (53)		(Note 7)			V				
Fill Fluid - 16th character									
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)					S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)					Р			
Inert oil - Galden G5	(Oxygen service)	(Note 8)				Ν			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)				D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)					G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)					С			
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)				W			
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)				Α			
Glycerin-water 70%	(FDA approved)	(Note 9)				В			

BASIC ORDERING INFORMATION model S26RA	S 2 6 R A	XXXXXXXXXXXX	X	
Flushing Ring: Hole and Thread - 17th character				
None (TO BE SELECTED FOR EXTENDED VERSIONS)		N		
1 hole - 1/2 in. NPT	(Note 3)	2		
2 holes - 1/2 in. NPT	(Note 3)	3		
1 hole - 1/4 in. NPT	(Note 3)	4		
2 holes - 1/4 in. NPT	(Note 3)	5		
Flushing Ring Material - 18th character				
None	(Note 10)		Ν	
AISI 316 L ss	(Note 11)	NACE	Α	
Hastelloy C-276	(Notes 11, 12)	NACE	Н	
Flushing Ring: Plug and Gasket - 19th character				
No plug - No gasket				1
No plug - garlock	(Note 11)			,
No plug - PTFE	(Note 11)			ı
No plug - graphite	(Note 11)			(
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE		[
AISI 316 L ss - garlock	(Notes 11, 13)	NACE		ı
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE		
AISI 316 L ss - graphite	(Notes 11, 13)	NACE		(
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE		-
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE		1
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE		1
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE		-

Note 1: Not available with mounting flange rating code E3, E5, G3, G4, G5

Note 2: Not available with extensions length and material code 2, 4, 6

Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6

Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM

Note 5: Not available with transmitter side of connection code L

Note 6: Not available with capillary protection code A, B

Note 7: Not available with capillary protection code N

Note 8: Suitable for oxygen service

Note 9: Suitable for food application

Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5

Note 11: Not available with Flushing ring: hole and thread code N

Note 12: Not available with Seal surface finish code 1

Note 13: Not available with Hastelloy C-276 flushing ring material code H

Note 14: Not available with AISI 316 L flushing ring material code A

Note 15: Not available with diaphragm material code ZM

BASIC ORDERING INFORMATION model S26RE Rotating flange diaphragm seals (flush and extended) to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number. BASE MODEL - 1st to 5th characters S 2 6 R E XX Χ Χ XX Χ Χ Rotating flange diaphragm seal (flush and extended) to EN 1092-1 Transmitter Side of Connection - 6th character continued High pressure side Н see next page Low pressure side Mounting Flange Rating / Size - 7th and 8th characters PN 16 - 40 / DN 50 N2 PN 63 / DN 50 N3 PN 100 / DN 50 N4 PN 16 / DN 80 Р1 P2 PN 40 / DN 80 PN 63 / DN 80 РЗ PN 100 / DN 80 Ρ4 PN 16 / DN 100 Q1 PN 40 / DN 100 Q2 Mounting Flange Material - 9th character Carbon steel C S AISI 316 ss Extensions Length and Material - 10th character Flush 50 mm. (2 in.) AISI 316 L ss (Note 1) 50 mm. (2 in.) Hastelloy C-276 (Note 1) 2 100 mm. (4 in.) AISI 316 L ss (Note 1) 3 100 mm. (4 in.) Hastellov C-276 (Note 1) 4 150 mm. (6 in.) AISI 316 L ss (Note 1) 5 150 mm. (6 in.) Hastelloy C-276 (Note 1) 6 Diaphragm Material - 11th and 12th characters AISI 316 L ss (Note 2) NACE SM AISI 316 L ss - Low thickness (not for extended diaphragm) NACE SL (Note 3) NACE НМ Hastelloy C-276 NACE Hastelloy C-276 - Low thickness (not for extended diaphragm) (Note 3) HL Hastelloy C-2000 (not for extended diaphragm) (Note 3) NACE MM Inconel 625 (not for extended diaphragm) NACE (Note 3) I M Tantalum (not for extended diaphragm) (Note 3) TM NACE AISI 316 L ss gold plated (not for extended diaphragm) (Note 3) NM AISI 316 L ss with PFA anti-stick coating (Note 2) NACE KM NACE ΥM Hastelloy C-276 with PFA anti-stick coating AISI 316 L ss with PFA coating anti-corrosion and anti-stick (Note 2) NACE WM Diaflex (AISI with anti-abrasion treatment) (Note 2) NACE FM Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm) (Note 3) NACE ΕM

Monel

NACE

GM

(Note 3)

BASIC ORDERING INFORMATION me	odel S26RE	S 2 6 R E X XX X X XX	Х	Х	Х	X	Х	X	X
Seal Surface Finish - 13 th character									
Serrated		(Note 4)	1				С	ontinue	ed
Smooth			2				see	next p	age
Capillary Protection - 14th character									
AISI 316 L ss armour				Α					
AISI 316 L ss armour with PVC protect	etive cover			В					
Extension tube for direct mount seal		(Note 5)		Ν					
Capillary Length m (Feet) - 15th chara	cter								
Direct-mount construction		(Note 6)			1				
1 (3)		(Note 7)			Α				
1.5 (5)		(Note 7)			В				
2 (7)		(Note 7)			С				
2.5 (8)		(Note 7)			D				
3 (10)		(Note 7)			Е				
3.5 (12)		(Note 7)			F				
4 (13)		(Note 7)			G				
4.5 (15)		(Note 7)			Н				
5 (17)		(Note 7)			J				
5.5 (18)		(Note 7)			K				
6 (20)		(Note 7)			L				
6.5 (22)		(Note 7)			M				
7 (23.5)		(Note 7)			Ν				
7.5 (25)		(Note 7)			Р				
8 (27)		(Note 7)			Q				
9 (30)		(Note 7)			R				
10 (33)		(Note 7)			S				
12 (40)		(Note 7)			Т				
14 (47)		(Note 7)			U				
16 (53)		(Note 7)			V				
Fill Fluid - 16th character						,			
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)					S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)					Р			
Inert oil - Galden G5	(Oxygen service)	(Note 8)				Ν			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)				D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)					G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)					С			
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)				W			
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)				Α			
Glycerin-water 70%	(FDA approved)	(Note 9)				В			

BASIC ORDERING INFORMATION model S26RE	S 2 6 R E	X XX X X XX X X X	Х	X	Χ
Flushing Ring: Hole and Thread - 17th character			_		
None (TO BE SELECTED FOR EXTENDED VERSIONS)			Ν		
1 hole - 1/2 in. NPT	(Note 3)		2		
2 holes - 1/2 in. NPT	(Note 3)		3		
1 hole - 1/4 in. NPT	(Note 3)		4		
2 holes - 1/4 in. NPT	(Note 3)		5		
Flushing Ring Material - 18th character				1	
None	(Note 10)			Ν	
AISI 316 L ss	(Note 11)	NACE		Α	
Hastelloy C-276	(Notes 11, 12)	NACE		Н	
Flushing Ring: Plug and Gasket - 19th character					
No plug - No gasket					Ν
No plug - garlock	(Note 11)				Α
No plug - PTFE	(Note 11)				В
No plug - graphite	(Note 11)				С
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE			D
AISI 316 L ss - garlock	(Notes 11, 13)	NACE			Ε
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE			F
AISI 316 L ss - graphite	(Notes 11, 13)	NACE			G
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE			Н
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE			L
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE			Μ
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE			Р

Note 1: Not available with mounting flange rating code N3, N4, P3, P4

Note 2: Not available with extensions length and material code 2, 4, 6

Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6

Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM

Note 5: Not available with transmitter side of connection code L

Note 6: Not available with capillary protection code A, B

Note 7: Not available with capillary protection code N

Note 8: Suitable for oxygen service

Note 9: Suitable for food application
Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5


Note 11: Not available with Flushing ring: hole and thread code $\ensuremath{\mathsf{N}}$

Note 12: Not available with Seal surface finish code 1

Note 13: Not available with Hastelloy C-276 flushing ring material code H

Note 14: Not available with AISI 316 L flushing ring material code A

BASIC ORDERING INFORMATION model S26RJ Rotating flange diaphragm seals (flush) to JIS

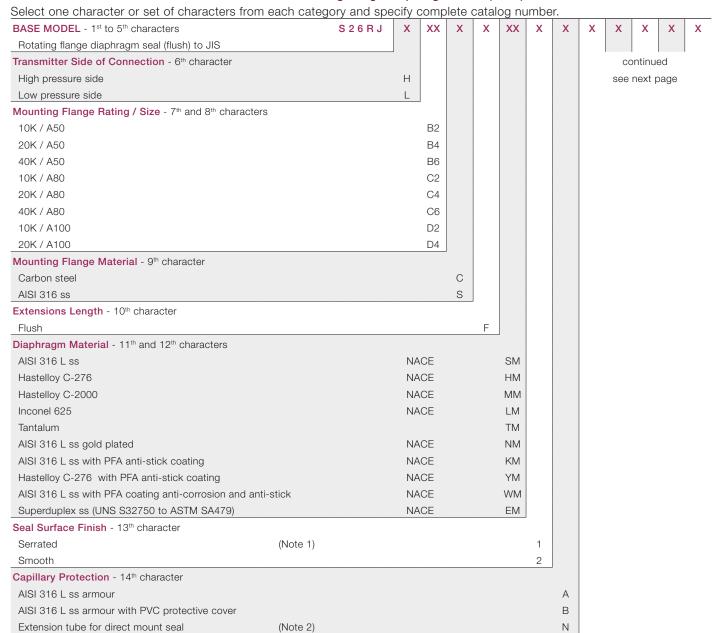

BASIC ORDERING INFORMATION r	nodel S26RJ	S 2 6 R J X XX X X XX X X	X	Χ	Х	Х
Capillary Length m (Feet) - 15 th char	acter					
Direct-mount construction		(Note 3)	1			
1 (3)		(Note 4)	Α			
1.5 (5)		(Note 4)	В			
2 (7)		(Note 4)	С			
2.5 (8)		(Note 4)	D			
3 (10)		(Note 4)	E			
3.5 (12)		(Note 4)	F			
4 (13)		(Note 4)	G			
4.5 (15)		(Note 4)	Н			
5 (17)		(Note 4)	J			
5.5 (18)		(Note 4)	K			
6 (20)		(Note 4)	L			
6.5 (22)		(Note 4)	М			
7 (23.5)		(Note 4)	N			
7.5 (25)		(Note 4)	Р			
8 (27)		(Note 4)	Q			
9 (30)		(Note 4)	R			
10 (33)		(Note 4)	S			
12 (40)		(Note 4)	Т			
14 (47)		(Note 4)	U			
16 (53)		(Note 4)	V			
Fill Fluid - 16th character						
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)			Р		
Inert oil - Galden G5	(Oxygen service)	(Note 5)		Ν		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 5)		D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)			G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			С		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)		W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)		Α		
Glycerin-water 70%	(FDA approved)	(Note 6)		В		
Flushing Ring: Hole and Thread - 17	7 th character					
None					Ν	
Flushing Ring Material - 18th charact	ter					

Ν None

Note 1: Not available with diaphragm material code HM, MM, LM, TN, NM, KM, YM, WM

Note 2: Not available with transmitter side of connection code $\ensuremath{\mathsf{L}}$

Note 3: Not available with capillary protection code A, B

Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service Note 6: Suitable for food application

BASIC ORDERING INFORMATION model S26RR Rotating flange diaphragm seals (flush) - Ring Joint

Select one character or set of characters from each category and specify complete catalog number. BASE MODEL - 1st to 5th characters S 2 6 R R Χ XXXXΧ Χ Χ Rotating flange diaphragm seal (flush) Ring Joint to ASME B16.5 Transmitter Side of Connection - 6th character continued High pressure side Н see next page Low pressure side L Mounting Flange Rating / Size - 7th and 8th characters ASME CL 150 / 1 1/2 in. D1 ASME CL 300 / 1 1/2 in. D2 ASME CL 600 / 1 1/2 in. D3 ASME CL 900-1500 / 1 1/2 in. D5 ASME CL 2500 / 1 1/2 in. D6 ASME CL 150 / 2 in. F1 ASME CL 300 / 2 in. E2 ASME CL 600 / 2 in. E3 ASME CL 900-1500 / 2 in. F5 ASME CL 2500 / 2 in. E6 ASME CL 150 / 3 in. G1 ASME CL 300 / 3 in. G2 ASME CL 600 / 3 in. G3 ASME CL 900 / 3 in. G4 ASME CL 1500 / 3 in. G5 G6 ASME CL 2500 / 3 in. Mounting Flange Material - 9th character Carbon steel С AISI 316 ss S Extensions Length - 10th character Flush F Diaphragm Material - 11th and 12th characters AISI 316 L ss NACE SM Hastelloy C-276 NACE НМ Inconel 625 NACE LM Seal Surface Finish - 13th character Ring joint 3 Capillary Protection - 14th character AISI 316 L ss armour Α AISI 316 L ss armour with PVC protective cover В Extension tube for direct mount seal Ν (Note 1)


BASIC ORDERING INFORMATION		S	S 2 6 R R X XX X X X X X X X	Χ	Х	Х	Х
Capillary Length m (Feet) - 15th c	haracter						
Direct-mount construction		(Note 2)		1			
1 (3)		(Note 3)		Α			
1.5 (5)		(Note 3)		В			
2 (7)		(Note 3)		С			
2.5 (8)		(Note 3)		D			
3 (10)		(Note 3)		Е			
3.5 (12)		(Note 3)		F			
4 (13)		(Note 3)		G			
4.5 (15)		(Note 3)		Н			
5 (17)		(Note 3)		J			
5.5 (18)		(Note 3)		Κ			
6 (20)		(Note 3)		L			
6.5 (22)		(Note 3)		М			
7 (23.5)		(Note 3)		Ν			
7.5 (25)		(Note 3)		Р			
8 (27)		(Note 3)		Q			
9 (30)		(Note 3)		R			
10 (33)		(Note 3)		S			
12 (40)		(Note 3)		Т			
14 (47)		(Note 3)		U			
16 (53)		(Note 3)		V			
Fill Fluid - 16th character					J		
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				Р		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			Ν		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				С		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			Α		
Glycerin-water 70%	(FDA approved)	(Note 5)			В		
Flushing Ring: Hole and Thread	- 17 th character					J	
None						Ν	
Flushing Ring Material - 18th char	racter						
None							Ν
Flushing Ring: Plug and Gasket -	- 19th character						
None							

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N Note 4: Suitable for oxygen service Note 5: Suitable for food application

BASIC ORDERING INFORMATION model S26RH Rotating flange diaphragm seals (flush) to ISO 10423 (API standards)

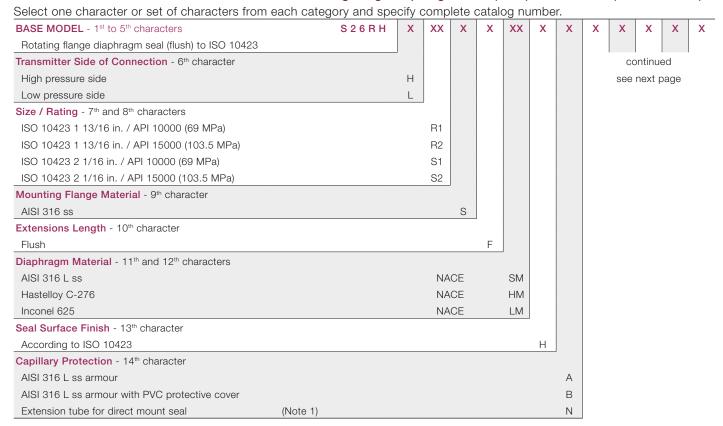


BASIC ORDERING INFORMATIO	N model S26RH	S 2 6 R H X XX X X XX X X	Х	Χ	Χ	Х
Capillary Length m (Feet) - 15th c	haracter					
Direct-mount construction		(Note 2)	1			
1 (3)		(Note 3)	Α			
1.5 (5)		(Note 3)	В			
2 (7)		(Note 3)	С			
2.5 (8)		(Note 3)	D			
3 (10)		(Note 3)	E			
3.5 (12)		(Note 3)	F			
4 (13)		(Note 3)	G			
4.5 (15)		(Note 3)	Н			
5 (17)		(Note 3)	J			
5.5 (18)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	K			
6 (20)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	L			
6.5 (22)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	М			
7 (23.5)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	Ν			
7.5 (25)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	Р			
8 (27)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)	Q			
Fill Fluid - 16th character						
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)			Р		
Inert oil - Galden G5	(Oxygen service)	(Note 4)		Ν		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)		D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)			G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			С		
lushing Ring: Hole and Thread	- 17 th character				1	
None					Ν	
Flushing Ring Material - 18th cha	racter					
None						Ν

None

Note 1: Not available with transmitter side of connection code L Note 2: Not available with capillary protection code A, B Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

BASIC ORDERING INFORMATION model S26FA Fixed flange diaphragm seals (flush) to ASME B16.5

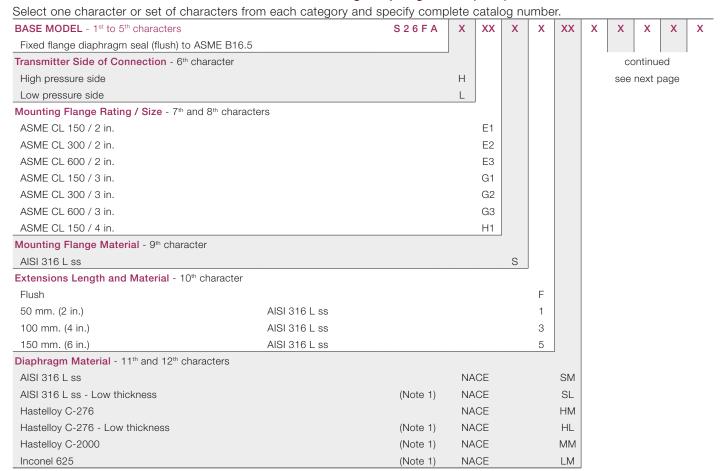

BASIC ORDERING INFORMATION	model S26FA	S 2 6 F A X XX X X XX	X	X	X	Х	Х	Х	X
Seal Surface Finish - 13th character									
Serrated		(Note 2)	1				c	ontinue	эd
Smooth			2				see	next p	age
Capillary Protection - 14th character				•					
AISI 316 L ss armour				Α					
AISI 316 L ss armour with PVC prot	ective cover			В					
Extension tube for direct mount sea	I	(Note 3)		Ν					
Capillary Length m (Feet) - 15 th cha	racter								
Direct-mount construction		(Note 4)			1				
1 (3)		(Note 5)			Α				
1.5 (5)		(Note 5)			В				
2 (7)		(Note 5)			С				
2.5 (8)		(Note 5)			D				
3 (10)		(Note 5)			Ε				
3.5 (12)		(Note 5)			F				
4 (13)		(Note 5)			G				
4.5 (15)		(Note 5)			Н				
5 (17)		(Note 5)			J				
5.5 (18)		(Note 5)			K				
6 (20)		(Note 5)			L				
6.5 (22)		(Note 5)			М				
7 (23.5)		(Note 5)			Ν				
7.5 (25)		(Note 5)			Р				
8 (27)		(Note 5)			Q				
9 (30)		(Note 5)			R				
10 (33)		(Note 5)			S				
12 (40)		(Note 5)			Т				
14 (47)		(Notes1, 5)			U				
16 (53)		(Notes1, 5)			V				
Fill Fluid - 16th character						J			
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)					S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)					Р			
Inert oil - Galden G5	(Oxygen service)	(Note 6)				Ν			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 6)				D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)					G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)					С			
Mineral oil Esso Marcol 152	(FDA approved)	(Note 7)				W			
Vegetable oil Neobee M-20	(FDA approved)	(Note 7)				Α			
Glycerin-water 70%	(FDA approved)	(Note 7)				В			

BASIC ORDERING INFORMATION model S26FA S 2 6 F A X XX X X X X X X X X X X X X X X X)
Flushing Ring: Hole and Thread - 17th character				
None		N		
1 hole - 1/2 in. NPT	(Note 1)	2		
2 holes - 1/2 in. NPT	(Note 1)	3		
1 hole - 1/4 in. NPT	(Note 1)	4		
2 holes - 1/4 in. NPT	(Note 1)	5		
Flushing Ring Material - 18th character			_	
None	(Note 8)		Ν	
AISI 316 L ss	(Note 9)	NACE	Α	
Hastelloy C-276	(Notes 9, 10)	NACE	Н	
Flushing Ring: Plug and Gasket - 19th character				,
No plug - No gasket				1
No plug - garlock	(Note 9)			1
No plug - PTFE	(Note 9)			E
No plug - graphite	(Note 9)			(
AISI 316 L ss - no gasket	(Notes 9, 11)	NACE		[
AISI 316 L ss - garlock	(Notes 9, 11)	NACE		E
AISI 316 L ss - PTFE	(Notes 9, 11)	NACE		ı
AISI 316 L ss - graphite	(Notes 9, 11)	NACE		(
Hastelloy C-276 - no gasket	(Notes 9, 12)	NACE		ŀ
Hastelloy C-276 - garlock	(Notes 9, 12)	NACE		l
Hastelloy C-276 - PTFE	(Notes 9, 12)	NACE		١
Hastelloy C-276 - graphite	(Notes 9, 12)	NACE		F

Note 1: Not available with extensions length and material code 1, 3, 5

Note 2: Not available with diaphragm material code MM, LM

Note 3: Not available with transmitter side of connection code L

Note 4: Not available with capillary protection code A, B

Note 5: Not available with capillary protection code N

Note 6: Suitable for oxygen service

Note 7: Suitable for food application


Note 8: Not available with Flushing ring: hole and thread code 2, 3, 4, 5

Note 9: Not available with Flushing ring: hole and thread code N Note 10: Not available with Seal surface finish code 1

Note 11: Not available with Hastelloy C-276 flushing ring material code H

Note 12: Not available with AISI 316 L flushing ring material code A

BASIC ORDERING INFORMATION model S26FE Fixed flange diaphragm seals (flush) to EN 1092-1

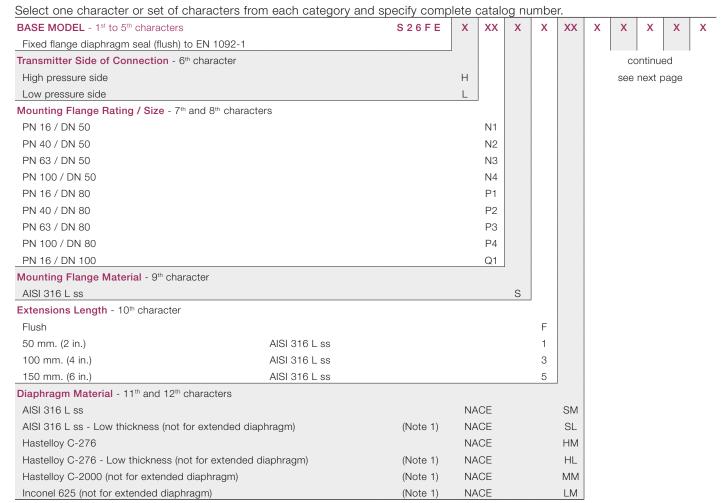

BASIC ORDERING INFORMATION	model S26FE	S 2 6 F E X XX X X XX	Х	Х	Х	Х	Х	X	Х
Seal Surface Finish - 13th character									
Serrated		(Note 2)	1				C	ontinue	ed
Smooth			2				see	next p	age
Form E - Spigot type		(Notes 1, 3)	4						
Form D - Groove type		(Notes 1, 3, 4)	6						
Capillary Protection - 14th character				, l					
AISI 316 L ss armour				Α					
AISI 316 L ss armour with PVC prote	ective cover			В					
Extension tube for direct mount sea		(Note 5)		Ν					
Capillary Length m (Feet) - 15th cha	racter								
Direct-mount construction		(Note 6)			1				
1 (3)		(Note 7)			Α				
1.5 (5)		(Note 7)			В				
2 (7)		(Note 7)			С				
2.5 (8)		(Note 7)			D				
3 (10)		(Note 7)			Е				
3.5 (12)		(Note 7)			F				
4 (13)		(Note 7)			G				
4.5 (15)		(Note 7)			Н				
5 (17)		(Note 7)			J				
5.5 (18)		(Note 7)			K				
6 (20)		(Note 7)			L				
6.5 (22)		(Note 7)			Μ				
7 (23.5)		(Note 7)			Ν				
7.5 (25)		(Note 7)			Р				
8 (27)		(Note 7)			Q				
9 (30)		(Note 7)			R				
10 (33)		(Note 7)			S				
12 (40)		(Note 7)			Т				
14 (47)		(Notes 1, 7)			U				
16 (53)		(Notes 1, 7)			V				
Fill Fluid - 16th character						,			
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)					S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)					Р			
Inert oil - Galden G5	(Oxygen service)	(Note 8)				Ν			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)				D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)					G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)					С			
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)				W			
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)				Α			
Glycerin-water 70%	(FDA approved)	(Note 9)				В			

BASIC ORDERING INFORMATION model S26FE	S 2 6 F E	X XX X X XX X X X X X	X	
Flushing Ring: Hole and Thread - 17th character				
None		N		
1 hole - 1/2 in. NPT	(Notes 1, 10)	2		
2 holes - 1/2 in. NPT	(Notes 1, 10)	3		
1 hole - 1/4 in. NPT	(Notes 1, 10)	4		
2 holes - 1/4 in. NPT	(Notes 1, 10)	5		
Flushing Ring Material - 18th character			_	
None	(Note 11)		Ν	
AISI 316 L ss	(Note 12)	NACE	Α	
Hastelloy C-276	(Notes 12, 13)	NACE	Н	
Flushing Ring: Plug and Gasket - 19th character				-
No plug - No gasket				
No plug - garlock	(Note 12)			
No plug - PTFE	(Note 12)			
No plug - graphite	(Note 12)			
AISI 316 L ss - no gasket	(Notes 12, 14)	NACE		
AISI 316 L ss - garlock	(Notes 12, 14)	NACE		
AISI 316 L ss - PTFE	(Notes 12, 14)	NACE		
AISI 316 L ss - graphite	(Notes 12, 14)	NACE		
Hastelloy C-276 - no gasket	(Notes 12, 15)	NACE		
Hastelloy C-276 - garlock	(Notes 12, 15)	NACE		
Hastelloy C-276 - PTFE	(Notes 12, 15)	NACE		
Hastelloy C-276 - graphite	(Notes 12, 15)	NACE		

Note 1: Not available with extensions length and material code 1, 3, 5

Note 2: Not available with diaphragm material code MM, LM Note 3: Not available with DN 100 size code Q1

Note 4: Not available with diaphragm material code HM, HL, MM, LM

Note 5: Not available with transmitter side of connection code L

Note 6: Not available with capillary protection code A, B

Note 7: Not available with capillary protection code N

Note 8: Suitable for oxygen service

Note 9: Suitable for food application

Note 10: Not available with Seal surface finish code 4, 6

Note 11: Not available with Flushing ring: hole and thread code 2, 3, 4, 5 $\,$


Note 12: Not available with Flushing ring: hole and thread code N

Note 13: Not available with Seal surface finish code 1

Note 14: Not available with Hastelloy C-276 flushing ring material code H

Note 15: Not available with AISI 316 L flushing ring material code A

BASIC ORDERING INFORMATION model S26MA Off-line flange diaphragm seals

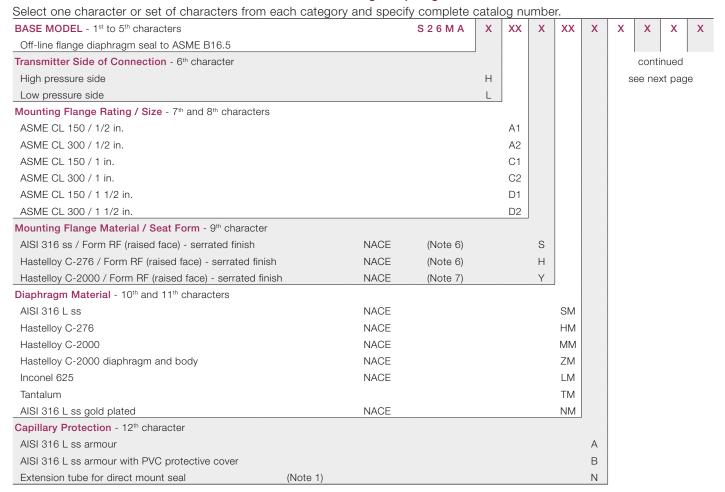

BASIC ORDERING INFORMATION model S26MA		S 2 6 M A X XX X XX X	X X		X		
Capillary Length m (Feet) - 13 th chara	cter						
Direct-mount construction		(Note 2)		1			
1 (3)		(Note 3)		A			
1.5 (5)		(Note 3)	1	В			
2 (7)		(Note 3)	(C			
2.5 (8)		(Note 3)		D			
3 (10)		(Note 3)		E			
3.5 (12)		(Note 3)		F			
4 (13)		(Note 3)	(G			
4.5 (15)		(Note 3)	1	н			
5 (17)		(Note 3)		J			
5.5 (18)		(Note 3)		K			
6 (20)		(Note 3)		L			
6.5 (22)		(Note 3)	1	М			
7 (23.5)		(Note 3)	I	N			
7.5 (25)		(Note 3)		P			
8 (27)		(Note 3)	(Q			
9 (30)		(Note 3)		R			
10 (33)		(Note 3)	;	s			
12 (40)		(Note 3)		Т			
Fill Fluid - 14th character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				Р		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			Ν		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				С		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			Α		
Glycerin-water 70%	(FDA approved)	(Note 5)			В		
Flushing Connections - 15th character	r						
Not required						1	
Provided (2 off)						Q	
Gasket - 16th character							,
PTFE							
Viton [®]		(Note 6)					
Graphite		(Note 6)					

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N Note 4: Suitable for oxygen service


Note 5: Suitable for food application

Note 6: Not available with diaphragm material code ZM

Note 7: Not available with diaphragm material code SM, HM, MM, LM, TM, NM

BASIC ORDERING INFORMATION model S26ME Off-line flange diaphragm seals


Select one character or set of characters from each category and specify complete catalog number.

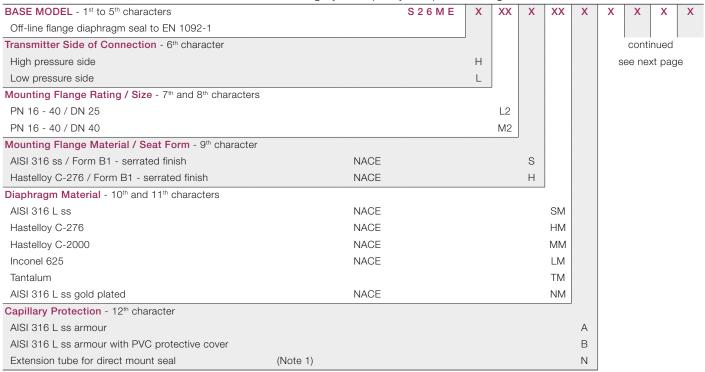

BASIC ORDERING INFORMATION model S26ME		S 2 6 M E X XX X XX X X X			Х)	
Capillary Length m (Feet) - 13 th chara	cter						
Direct-mount construction		(Note 2)	-				
1 (3)		(Note 3)	A	۱ ا			
1.5 (5)		(Note 3)	E	3			
2 (7)		(Note 3)	(
2.5 (8)		(Note 3)					
3 (10)		(Note 3)	E				
3.5 (12)		(Note 3)	F	=			
4 (13)		(Note 3)	(à			
4.5 (15)		(Note 3)	H	4			
5 (17)		(Note 3)		J			
5.5 (18)		(Note 3)	ŀ	<			
6 (20)		(Note 3)	L	-			
6.5 (22)		(Note 3)	N	Л			
7 (23.5)		(Note 3)	١	1			
7.5 (25)		(Note 3)	F	>			
8 (27)		(Note 3)	(2			
9 (30)		(Note 3)	F	3			
10 (33)		(Note 3)	9	3			
12 (40)		(Note 3)	٦	-			
Fill Fluid - 14th character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			;	S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)			1	Р		
Inert oil - Galden G5	(Oxygen service)	(Note 4)		1	N		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)		1	D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)			(G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			(С		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)		١	W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)		,	Α		
Glycerin-water 70%	(FDA approved)	(Note 5)		1	В		
lushing Connections - 15th character							
Not required						1	
Provided						Q	
Gasket - 16 th character							
PTFE							
Viton®							
Graphite							

Note 1: Not available with transmitter side of connection code L Note 2: Not available with capillary protection code A, B Note 3: Not available with capillary protection code N Note 4: Suitable for oxygen service Note 5: Suitable for food application

BASIC ORDERING INFORMATION model S26TT Off-line threaded diaphragm seals

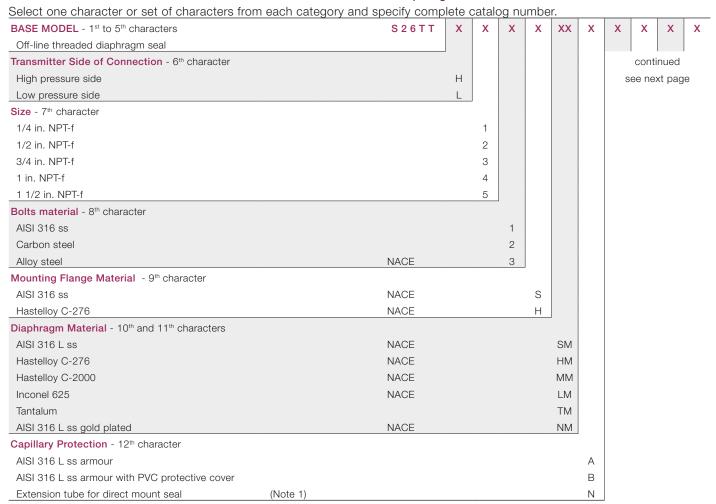

BASIC ORDERING INFORMATION r	nodel S26TT		S 2 6 T T X XX X XX X	X	X	
Capillary Length m (Feet) - 13th char	racter					
Direct-mount construction		(Note 2)	1			
1 (3)	(Note 3)	Α				
1.5 (5)		(Note 3)	В			
2 (7)		(Note 3)	С			
2.5 (8)		(Note 3)	D			
3 (10)		(Note 3)	E			
3.5 (12)		(Note 3)	F			
4 (13)		(Note 3)	G			
4.5 (15)		(Note 3)	Н			
5 (17)		(Note 3)	J			
5.5 (18)		(Note 3)	K			
6 (20)		(Note 3)	L			
6.5 (22)		(Note 3)	М			
7 (23.5)		(Note 3)	N			
7.5 (25)		(Note 3)	Р			
8 (27)		(Note 3)	Q			
9 (30)		(Note 3)	R			
10 (33)		(Note 3)	S			
12 (40)		(Note 3)	Т			
Fill Fluid - 14th character						
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)			Р		
Inert oil - Galden G5	(Oxygen service)	(Note 4)		Ν		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)		D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)			G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			С		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)		W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)		Α		
Glycerin-water 70%	(FDA approved)	(Note 5)		В		
Flushing Connections - 15th charact	er				_	
Not required					1	
Provided (2 off)		(Note 6)			Q	
Gasket - 16 th character						J
PTFE						
Viton®						
Graphite						

Note 1: Not available with transmitter side of connection code L


Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service Note 5: Suitable for food application

Note 6: Not available with size code 5

BASIC ORDERING INFORMATION model S26SS Sanitary and food diaphragm seals

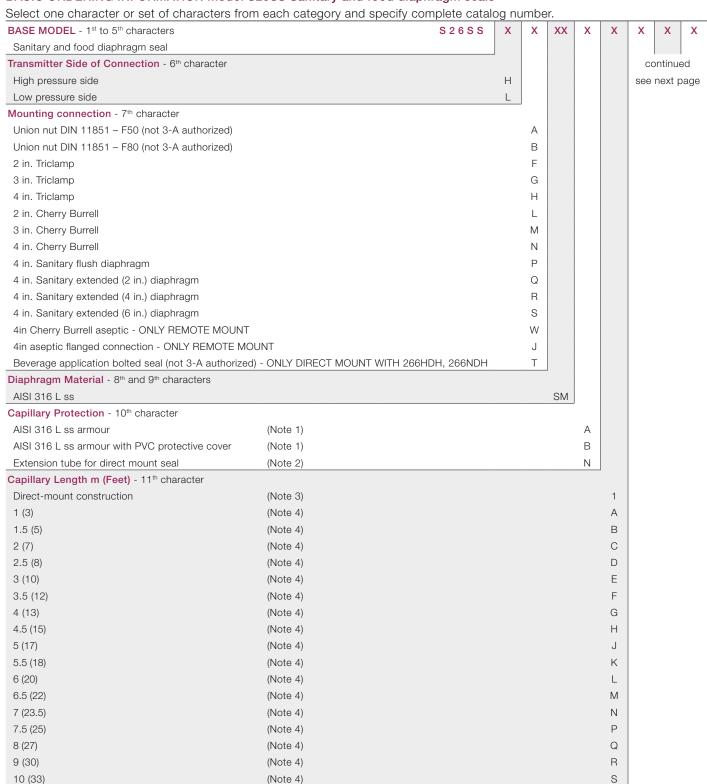

BASIC ORDERING INFORMATION m	nodel S26SS		S 2 6 S S X X XX X X	Х	Χ
Fill Fluid - 12th character					
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S	
Inert oil - Halocarbon 4.2	(-40 to 250 °C; -40 to 480 °F)	(Note 5)		D	
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			С	
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)		W	
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)		Α	
Glycerin-water 70%	(FDA approved)	(Note 6)		В	
Clamp/Fittings - 13th character					
None					1
2 in. V-band Clamp (for 2 in. Triclamp	o)				Α
3 in. V-band Clamp (for 3 in. Triclamp)					В
4 in. V-band Clamp (for 4 in. Triclamp, 4 in. Cherry Burrell, 4 in. Sanitary flush and 4 in. aseptic flanged)					С
4 in. Tank spud, tank wall up to 4.7mm (0.18) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)					D
4 in. Tank spud, tank wall up to 9.5mm (0.37) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)				Е	
4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended seal)				F	
Tank spud for 2 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 2 in. seal)					G
Tank spud for 4 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 4 in. seal)					Н
Tank spud for 6 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 6 in. seal)					J
Aseptic tank spud (for 4 in. aseptic fla	anged seal)				Р
Flanged tank spud with 6 holes (for 1 1/2 in. beverage seal)					K
Gasket - 14th character					
None					
Ethylene propylene gasket DN100 (for 4 in. Sanitary extended seal) - (EPDM 3-A 18-03 Class II)					
Ethylene propylene gasket (for 1 1/2 in. beverage seal)					
Ethylene propylene gasket DN50 (for F50 Union nut seal)					
Ethylene propylene gasket DN80 (for	F80 Union nut seal)				
Ethylene propylene gasket (for 4 in. S	Sanitary flush and 4 in. aseptic) - (EPDM 3-A 18	3-03 Class II)			

Note 1: Not available with beverage bolted seal connection code T Note 2: Not available with transmitter side of connection code L $\,$


Note 3: Not available with capillary protection code A, B Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service

Note 6: Suitable for food application

BASIC ORDERING INFORMATION model S26KN Pulp and paper diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

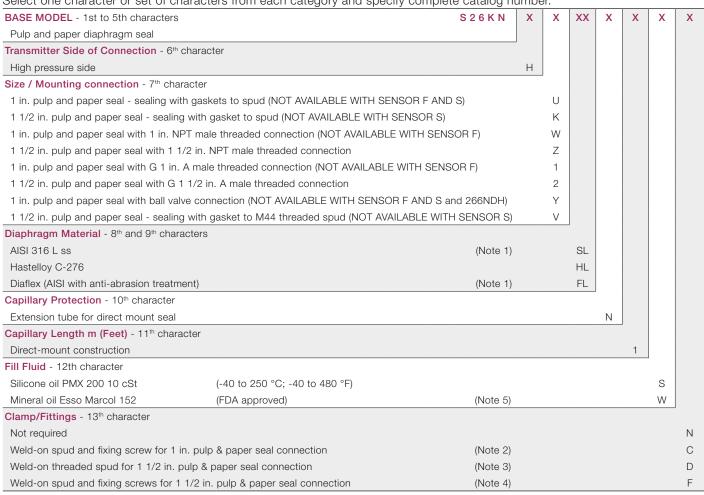

Note 1: Not available with connection code Y

Note 2: Suitable ONLY for 1 in. size - sealing with gaskets code U


Note 3: Suitable ONLY for 1-1/2 in. size to M44 threaded spud - sealing with gaskets code V

Note 4: Suitable ONLY for 1-1/2 in. size - sealing with gaskets code K

Note 5: Suitable for food application

BASIC ORDERING INFORMATION model S26JN In-line diaphragm seals


Select one character or set of characters from each category and specify complete catalog number.

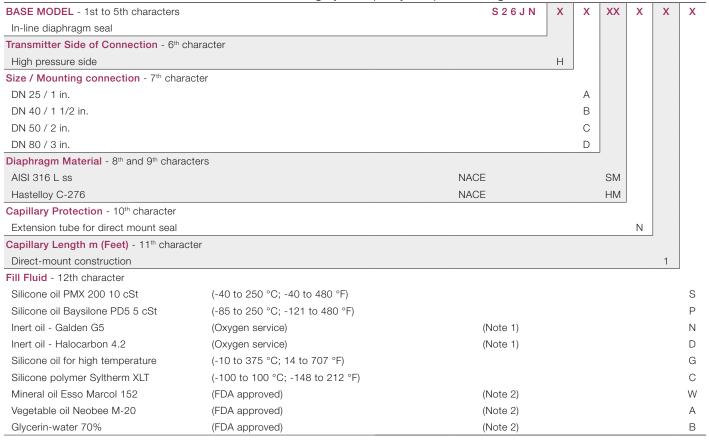

Note 1: Suitable for oxygen service Note 2: Suitable for food application

BASIC ORDERING INFORMATION model S26VN Socket and saddle diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

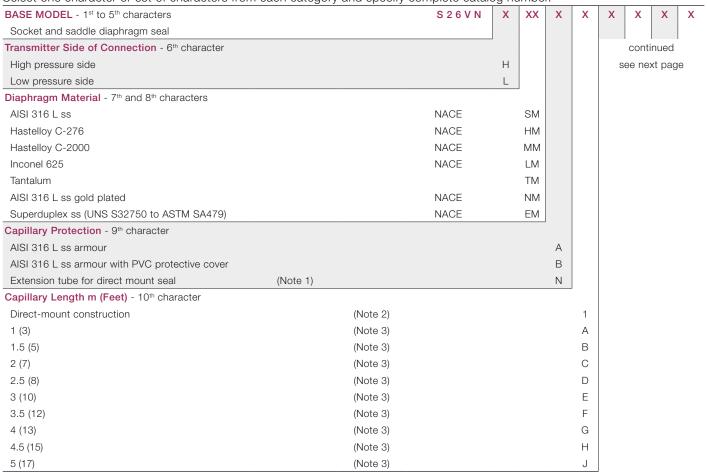

BASIC ORDERING INFORMATION	model S26VN		S 2 6 V N X XX X	X	X
ill Fluid - 11th character					
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S	
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)			Р	
Inert oil - Galden G5	(Oxygen service)	(Note 4)		Ν	
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)		D	
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)			G	
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			С	
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)		W	
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)		Α	
Glycerin-water 70%	(FDA approved)	(Note 5)		В	
Process Fitting Connections - 12th	character				
Not required					N
Saddle 2 in.					1
Saddle 2 1/2 in.					2
Saddle 3 in.					3
Saddle 4 in.					4
Saddle 5 in.					5
Saddle 6 in.					6
Socket 1/2 in.					Α
Socket 3/4 in.					В
Socket 1 in.					С
Socket 1 1/2 in.					D
Socket 2 in.					E
Gasket - 13 th character					
PTFE					
Graphite					

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service Note 5: Suitable for food application

- ® Hastelloy is a registered trademark of Haynes International
- ® Monel and Inconel are registered trademarks of Special Metals Corporation
- ® Viton is a registered trademark of E.I. DuPont de Nemour
- ® PMX 200 and Syltherm are registered trademarks of Dow Corning Corporation
- ® Galden is a registered trademark of Solvay Group
- ® Halocarbon is a registered trademark of Halocarbon Products Co.
- ® Baysilone is a registered trademark of Bayer
- ® Neobee is a registered trademark Stepan Specialty Products, LCC
- ® Esso Marcol 152 is a registered trademark Esso Italiana
- ® HART and WirelessHART are registered trademarks of HART Communication Foundation
- ® PROFIBUS is a registered trademark of Profibus International
- $^{\mbox{\tiny TM}}$ FOUNDATION Fieldbus is a trademark of Fieldbus Foundation

Contact us

ABB Ltd.

Industrial Automation

Howard Road St. Neots Cambridgeshire PE19 8EU UK

Tel: +44 (0)1480 475321 Fax: +44 (0)1480 217948

ABB Inc.

Industrial Automation

125 E. County Line Road Warminster PA 18974 USA

Tel: +1 215 674 6000 Fax: +1 215 674 7183

ABB Automation Products GmbH Industrial Automation

Schillerstr. 72 32425 Minden Germany

Tel: +49 551 905 534 Fax: +49 551 905 555

ABB S.p.A.

Industrial Automation

Via Luigi Vaccani 4 22016 Tremezzina (CO) Italy

Tel: +39 0344 58111

www.abb.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2017 ABB All rights reserved 3KXP200017R1001







Sales

Service

Softwar





Our offering:

9 m B	Actuators and Positioners		Analytical Instruments
	Device Management, Fieldbus and Wireless		Flow Measurement
	Force Measurement	A. A.	Level Measurement
ēĒ	Natural Gas Measurement		Pressure Measurement
THE PARTY OF THE P	Recorders and Controllers	CK 100	Temperature Measurement

HMI – Automação e Instrumentação, Lda.

Travessa da Indústria, nº 111 4780-573 Santo Tirso PORTUGAL

Fax. +351 300 013 487

Tel. +351 252 850 501

Web: <u>www.hmi.pt</u> Email: <u>hmi@hmi.pt</u>