



FICHA TÉCNICA DE PRODUTO

PRODUCT DATASHEET

HMI – Automação e Instrumentação, Lda.

Travessa da Indústria, nº 111
4780-573 Santo Tirso
PORTUGAL

Tel. +351 252 850 501
Fax. +351 300 013 487

Web: www.hmi.pt

Email: hmi@hmi.pt

PitoMaster FPD550

Compact averaging pitot flowmeter

Economical flow metering
solutions for gases, liquids and
steam



Compact flowmeter with integral transmitter, manifold and temperature element

- for volumetric- or mass-flow metering; available for pipe sizes DN100 to DN600 (4 to 24 in.)
- problems caused by impulse piping eliminated by mounting the transmitter and manifold directly onto the meter
- complete with manifold and ABB DP or Multivariable transmitter

Unique profile shape

- offers high flow turndown

Low permanent pressure loss

- low energy consumption and running costs
- reduced carbon footprint

Dual averaging feature

- gives improved accuracy with asymmetric flow profiles

Factory acceptance report

- supplied with report detailing results of critical inspection checks, plus certification data

PitoMaster FPD550

Compact averaging pitot flowmeter

PitoMaster – compact averaging pitot tube flowmeter

PitoMaster is an averaging pitot tube-based flowmeter designed to greatly simplify specification, installation and commissioning.

PitoMaster is a one-piece flowmeter assembly with the following features:

- Averaging Pitot tube assembly with choice of pipe sizes from DN100 to DN 600 (4 to 24 in.)
- Threaded or flanged pipe connection
- Integral 3-valve instrument manifold (optional 5-valve manifold available)
- Optional integral mineral-insulated temperature element for corrected volume / mass calculations; optional integral temperature transmitter
- Integral DP or multivariable transmitter, factory fitted to manifold
- Fully leak tested
- New 'through-the-glass' (TTG) keypad technology enables configuration without the need to remove the transmitter covers, even in hazardous areas.
- Factory configuration saves the user time during commissioning and ensures that the flowmeter output span truly matches that of the application flowrate.



Benefits

PitoMaster avoids many of the difficulties involved in the sizing, selection, procurement, installation and commissioning of conventional DP flowmeter installations.

- With all the major components in one assembly, PitoMaster eliminates the problems of sourcing multiple components. It provides large savings in cost and time due to the simplicity of purchasing, design and installation.
- Integral transmitter and manifold with compact tapping connections eliminates the need to run and connect impulse piping and offers:
 - reduced possibility of impulse line blockage
 - reduced number of potential leakage points
- The assembly is pressure-tested in the factory, ensuring the connections between the tapping points and the transmitter are completely free of leaks.
- The 'Plugged Impulse Line Detection' (PILD) feature generates a warning via HART communication if either or both of the impulse lines become fully or partially obstructed (for example, by foreign material or ice). The meter can also be configured to drive the analog output signal to the 'Alarm current'.

Versions

PitoMaster is available in two versions:

PitoMaster V

- a compact averaging pitot tube flowmeter for general purpose measurement of liquids, gases and steam in volumetric units (actual volume). It uses the ABB 266 DSH transmitter and provides a flow rate and total display with an output of 4 to 20 mA proportional to the actual volume flowrate.

PitoMaster V has a stainless steel body and an alloy, 304 stainless steel or 316 stainless steel transmitter case.

PitoMaster M

- a compact averaging pitot tube flowmeter, giving measurement directly in mass- or corrected volume-units for liquids and steam. Gas flow measurement is directly in reduced volume units. It uses the ABB 267CS multivariable transmitter to measure DP, temperature and pressure, providing a flowrate and total display and transmits a 4 to 20 mA signal proportional to the mass or corrected volume flowrate.

PitoMaster M has a stainless steel body, an aluminium alloy transmitter case (optionally stainless steel) and an optional internal temperature element.

DP span limits

For both versions there are 6 DP sensor ranges available. For optimum accuracy refer to Table 1 and select the sensor so that the full scale DP is in the shaded area and is as close as possible to the maximum range of the sensor.

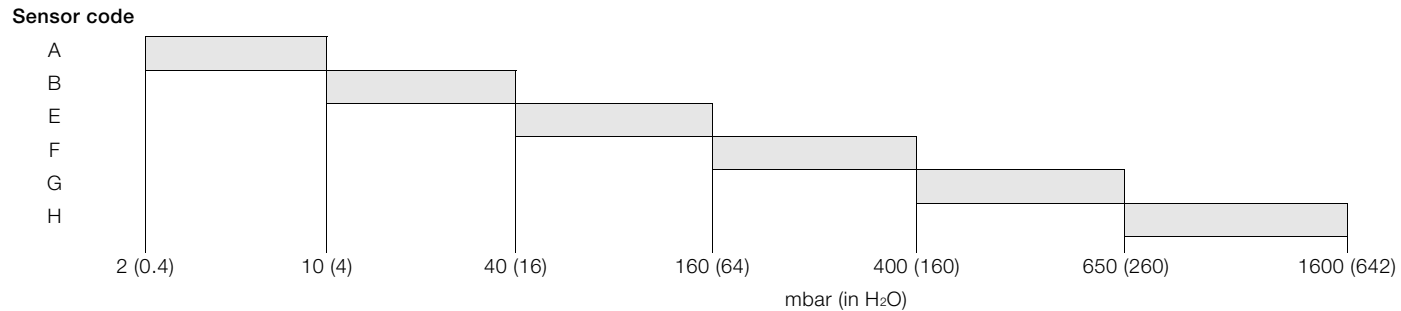


Table 1: PitoMaster V and PitoMaster M – full scale DP application range

PitoMaster FPD550

Compact averaging pitot flowmeter

Specification – general

Fluids

Liquids, gases and saturated steam

Line sizes

100 to 600 mm (4 to 24 in.)

Probe

13 or 25 mm ($\frac{1}{2}$ or 1 in.) diameter probe with optional end support

Process connection

- Threaded BSPT or NPT
- Flanged DN25 (1 in.) or DN 40 ($1\frac{1}{2}$ in.) to ANSI 150RF, 300RF or NP10/16, NP25/40

Construction materials

Probe

316 stainless steel

Manifold

316 stainless steel

Manifold seals

PTFE

Flange

316 stainless steel

Weld adaptor

A105 carbon steel; 316 stainless steel

Process isolating diaphragms

Hastelloy C-276™

(AISI 316 L stainless steel gold plated for Hydrogen service)
packing

Process flanges, adapters, plugs and drain / vent valves

AISI 316 L stainless steel

Sensor fill fluid

- Silicone oil
- Inert fill (Halocarbon™ 4.2 or Galden™)

Manifold

Integral 3-valve manifold (optional 5-valve manifold)

Output signal

- Two-wire, 4 to 20 mA, selected for square-root output
- Low flow cut-off facility
- HART® communication provides digital process variable (% , mA or engineering units) superimposed on 4 to 20 mA signal, with protocol based on Bell202 FSK standard
- Optional Profibus PA, Foundation Fieldbus or Modbus communications

Accuracy

Uncalibrated

PitoMaster V:

- ± 1.4 % of actual flow

PitoMaster M:

- ± 1.15 % of actual flow

Flow range

8:1

Maximum pressure

50 Bar @ 38 °C (725 psi @ 100 °F)

Maximum process temperature

180 °C (356 °F)

At the transmitter sensor

Silicone oil filled sensor F to H:

— -40 to 121 °C (-40 to 250 °F)

Silicone oil filled sensor A, B, E:

— -25 to 121 °C (-13 to 250 °F)

Inert (Galden) filled sensor F to H:

— -20 to 100 °C (-4 to 212 °F)

Inert (Galden) filled sensor E:

— -10 to 100 °C (14 to 212 °F)

Inert (Halocarbon) filled sensor F to H:

— -20 to 100 °C (-4 to 212 °F)

Inert (Halocarbon) filled sensor E:

— -10 to 100 °C (14 to 212 °F)

IMPORTANT

For hazardous atmosphere applications see the temperature range specified on the certificate / approval relevant to the type of protection

Ambient Temperature Limits

Note. LCD display may not be clearly readable below -20 °C (-4 °F) or above 70 °C (158 °F)

PitoMaster V

V1: Sensors A, B: -25 and 85 °C (-13 and 185 °F)

Other sensors: -40 and 85 °C (-40 and 185 °F)

V2: Sensors A to E incl: -25 and 85 °C (-13 and 185 °F)

Other sensors: -40 and 85 °C (-40 and 185 °F)

PitoMaster M

M1: -40 and 85 °C (-40 and 185 °F)

Storage limits

-50 to 85 °C (-58 to 185 °F)

LCD integral display:

— -40 to 85 °C (-40 to 185 °F)

Integral display

PitoMaster V

— Wide screen LCD, 128 x 64 pixel, 52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix

— Multi language

— 4 keys for flowmeter configuration and management

— Totalized and instantaneous flow indication

— Display can also indicate diagnostic messages and provides configuration facilities

PitoMaster M

19-segment alphanumeric display (2-line, 6-character) with additional bar chart display. Back illumination optional.

PitoMaster FPD550

Compact averaging pitot flowmeter

Environmental limits

Electromagnetic compatibility (EMC)

Complies with EN 61326 and NAMUR NE-21

Surge immunity level (with surge protector)

4 kV (according to IEC 1000-4-5 EN 61000-4-5)

Pressure equipment directive (PED)

Complies with 97/23/EEC Category III Module H

Humidity

Relative humidity:

- up to 100 %

Condensing, icing:

- admissible

Vibration resistance

Accelerations up to 2 g at frequency up to 1000 Hz
(according to IEC 60068-2-6)

Shock resistance

Acceleration:

- 50 g

Duration:

- 11 ms (according to IEC 60068-2-27)

Wet and dust-laden atmospheres

The meter is dust and sand tight and protected against immersion effects as defined by EN 60529 (1989) to IP 67 (IP 68 on request) or by NEMA to 4X or by JIS to C0920. IP65 with Harting Han connector.

Hazardous atmospheres

With or without integral display

Combined ATEX code EW (= E1 + E2 + E3 below)

Combined ATEX and FM Approvals code EN

(= E1 + E2 + E3 + E4 + E6 below)

Intrinsic safety:

- ATEX Europe (code E1)
- II 1/2 G Ex ia IIC T6/T5/T4; IP67
- II 1 D Ex iaD 20 T85 °C
- II 1/2 D Ex iaD 21 T85 °C; IP67

Explosion proof:

- ATEX Europe (code E2)
- II 1/2 G Ex d IIC T6
- II 1/2 D Ex tD A21 T85 °C (–50 °C • Ta • +75 °C); IP67

Type 'N':

- ATEX Europe (code E3) type examination
- II 3 G Ex nL IIC T6/T5/T4
- II 3 D Ex tD A22 T85 °C; IP67

FM Approvals US (code E6) and Canada (code E4)

Explosion proof (US):

- Class I, Div. 1, Groups A, B, C, D

Explosion proof (Canada):

- Class I, Div. 1, Groups B, C, D

Dust ignition proof:

- Class II, Div. 1, Groups E, F, G

Suitable for:

- Class II, Div. 2, Groups F, G; Class III, Div.1, 2

Non-incendive:

- Class I, Div. 2, Groups A, B, C, D

Intrinsically safe:

- Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G
- Class I, Zone 0 AEx ia IIC T6/T4, Zone 0 (FM US)
- Class I, Zone 0 Ex ia IIC T6/T4, Zone 0 (FM Canada)

FM Approvals US

Intrinsically safe (code EA):

- Class I; Division 1; Groups A, B, C, D;
- Class I; Zone 0; Group IIC; AEx ia IIC

Explosion proof (code EB):

- Class I, Division 1, Groups A, B, C, D;
- Class II/III, Division 1, Groups E, F, G

Refer to certificates for ambient temperature ranges (within the limits –50 to 85 °C) related to the different temperature classes

CSA Approvals Canada (code EE):

Explosion proof:

- Class I, Division 1, Groups B, C, D;
- Class II/III, Division 1, Groups E, F, G

Weights

Typical product weights in kg (lbs) excluding pipe fittings and end supports

Size mm (in.)	Threaded	Flanged 1½ in. ANSI 150lb	Flanged 1½ in. ANSI 300lb	Flanged DN40 PN10/16	Flanged DN40 PN25
100 (4)	10 (22)	12 (26.5)	13 (28.7)	12 (26.5)	12 (26.5)
150 (6)	10 (22)	12 (26.5)	13 (28.7)	13 (28.7)	13 (28.7)
200 (8)	10 (22)	12 (26.5)	13 (28.7)	13 (28.7)	13 (28.7)
250 (10)	11 (24.3)	12 (26.5)	14 (30.9)	13 (28.7)	13 (28.7)
300 (12)	11 (24.3)	12 (26.5)	14 (30.9)	13 (28.7)	13 (28.7)
350 (14)	11 (24.3)	12 (26.5)	14 (30.9)	13 (28.7)	13 (28.7)
400 (16)	11 (24.3)	12 (26.5)	14 (30.9)	13 (28.7)	13 (28.7)
450 (18)	11 (24.3)	13 (28.7)	14 (30.9)	13 (28.7)	13 (28.7)
500 (20)	11 (24.3)	13 (28.7)	14 (30.9)	13 (28.7)	13 (28.7)
600 (24)	11 (24.3)	13 (28.7)	14 (30.9)	13 (28.7)	13 (28.7)

Weight adders:

5 valve manifold +1 kg (2.2 lbs)

PitoMaster V design level 2 (SS) +2 kg (4.4 lbs)

PitoMaster M design level 1 (SS) +1 kg (2.2 lbs)

DP span

Sensor code	Upper range limit (URL)	Minimum span
A	1 kPa	0.05 kPa
	10 mbar	0.5 mbar
	4 in. H ₂ O	0.2 in. H ₂ O
B	4 kPa	0.2 kPa
	40 mbar	1.4 mbar
	16 in. H ₂ O	0.56 in. H ₂ O
E	16 kPa	0.54 kPa
	160 mbar	1.6 mbar
	64 in. H ₂ O	0.65 in. H ₂ O
F	40 kPa	0.4 kPa
	400 mbar	4 mbar
	160 in. H ₂ O	1.6 in. H ₂ O
G	65 kPa	0.65 kPa
	650 mbar	6.5 mbar
	260 in. H ₂ O	2.6 in. H ₂ O
H	160 kPa	1.6 kPa
	1600 mbar	16 mbar
	642 in. H ₂ O	6.4 in. H ₂ O


PitoMaster FPD550

Compact averaging pitot flowmeter

Dimensions – PitoMaster V

Design level 1 – threaded process connection


Dimensions in mm (in.)

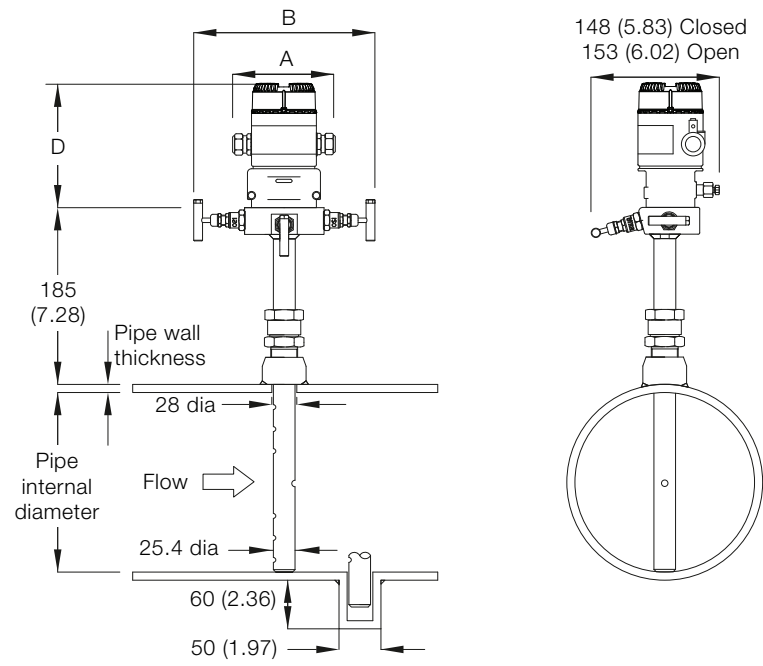


A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open
D	153 (6.0) with display	
	124 (4.9) without display	

Design level 2 – threaded process connection

Dimensions in mm (in.)

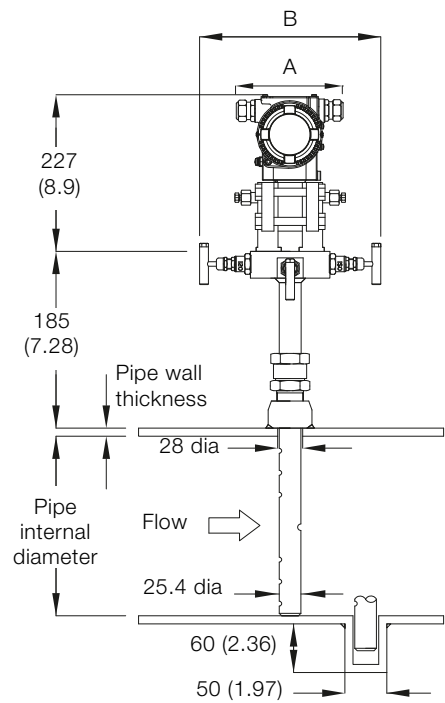

145 (5.71) Closed
151 (5.94) Open

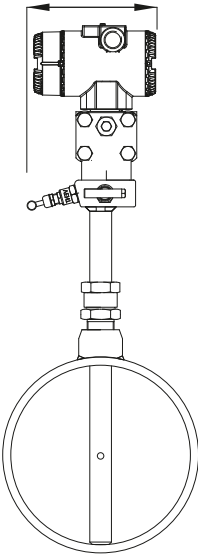


A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open

PitoMaster FPD550

Compact averaging pitot flowmeter

Design level 1 – flanged process connection

Dimensions in mm (in.)

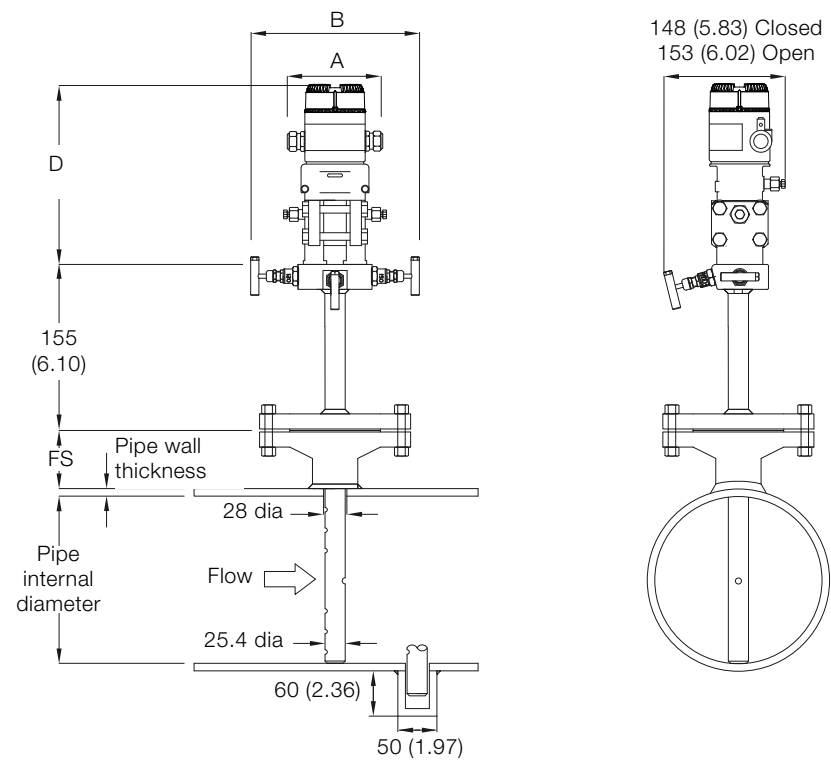


A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open
D	153 (6.0) with display	
	124 (4.9) without display	


Flange Rating	150 lb	300 lb	PN10 PN16	PN25
FS	95 (3.74)	100 (3.94)	78 (3.07)	78 (3.07)

Design level 2 – flanged process connection

Dimensions in mm (in.)

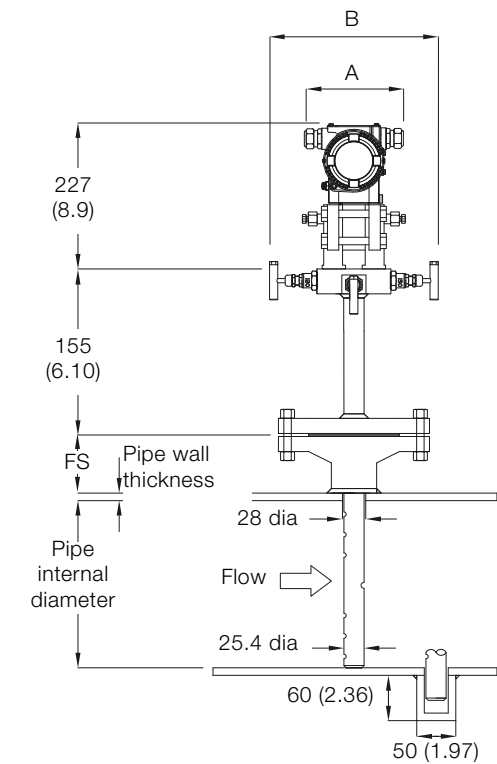

145 (5.71) Closed
151 (5.94) Open

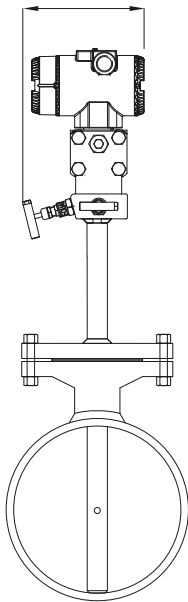

A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open

Flange Rating	150 lb	300 lb	PN10 PN16	PN25
FS	95 (3.74)	100 (3.94)	78 (3.07)	78 (3.07)


PitoMaster FPD550

Compact averaging pitot flowmeter

Dimensions – PitoMaster M

Design level 1 – threaded process connection


Dimensions in mm (in.)

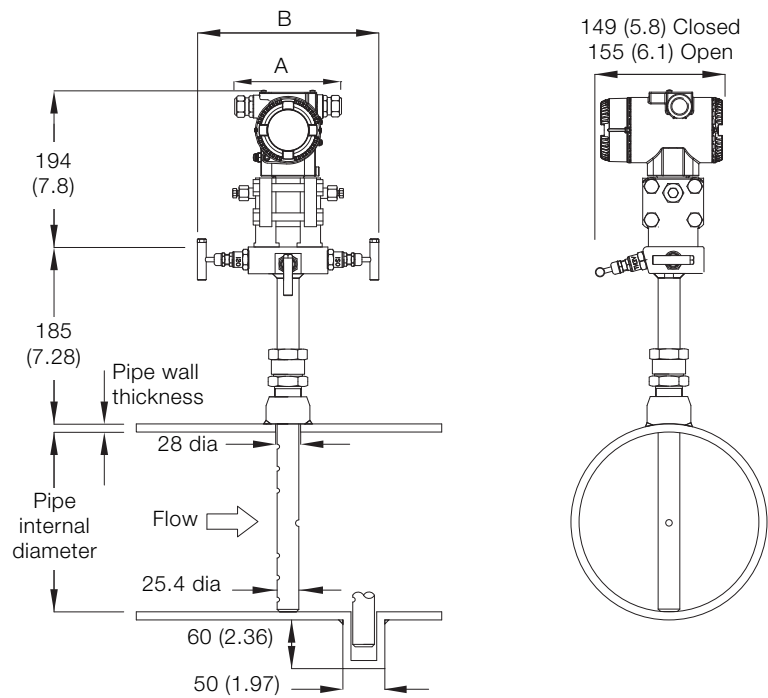

A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open

Design level 1 – threaded process connection and integral temperature measurement

Dimensions in mm (in.)

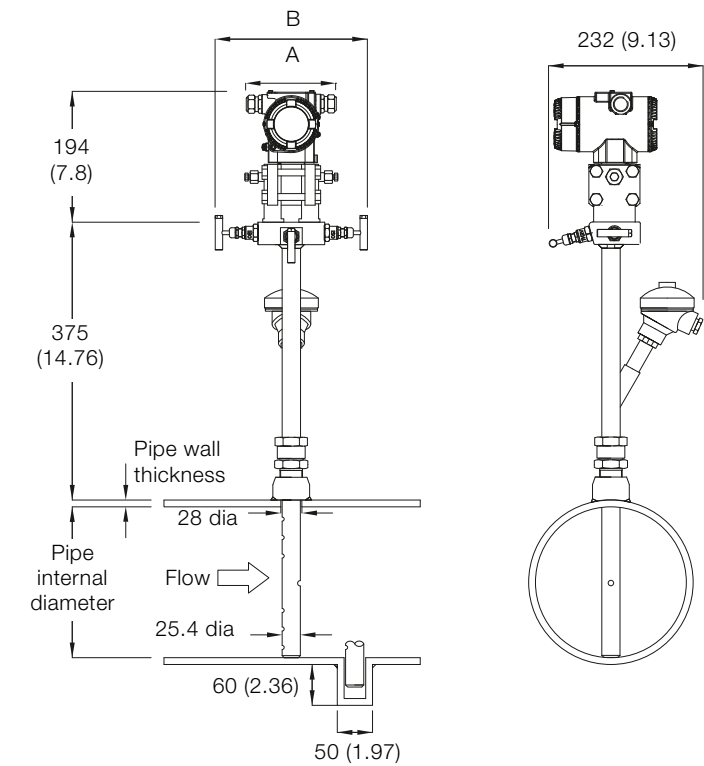


A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed
		212 (8.35) open
	5-valve	252 (9.92) closed
		269 (10.59) open

PitoMaster FPD550

Compact averaging pitot flowmeter

Design level 1 – flanged process connection

Dimensions in mm (in.)

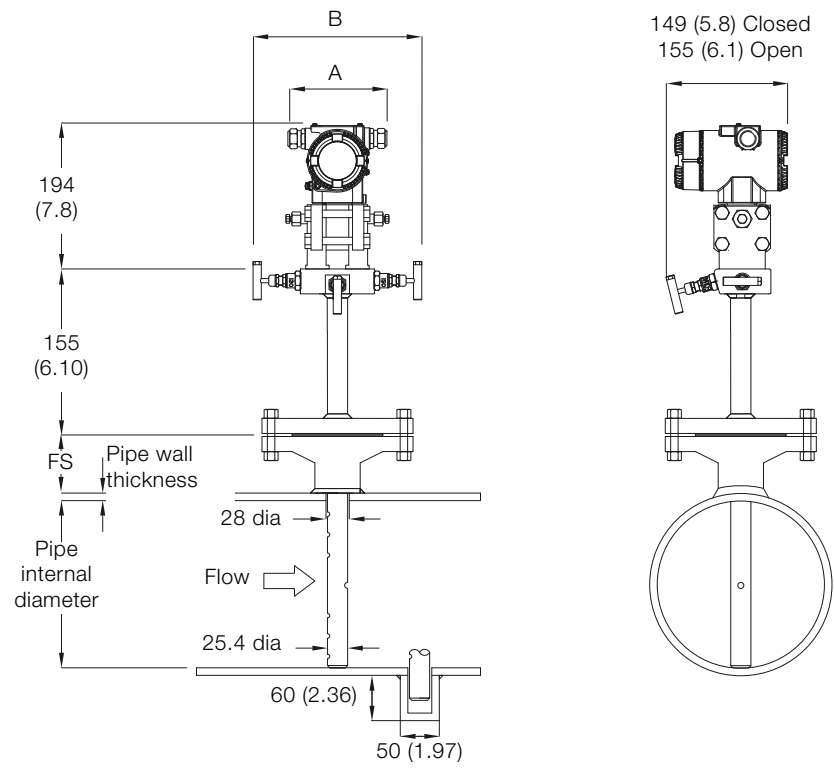


A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open

Flange Rating	150 lb	300 lb	PN10 PN16	PN25
FS	95 (3.74)	100 (3.94)	78 (3.07)	78 (3.07)

Design level 1 – flanged process connection and integral temperature measurement

Dimensions in mm (in.)

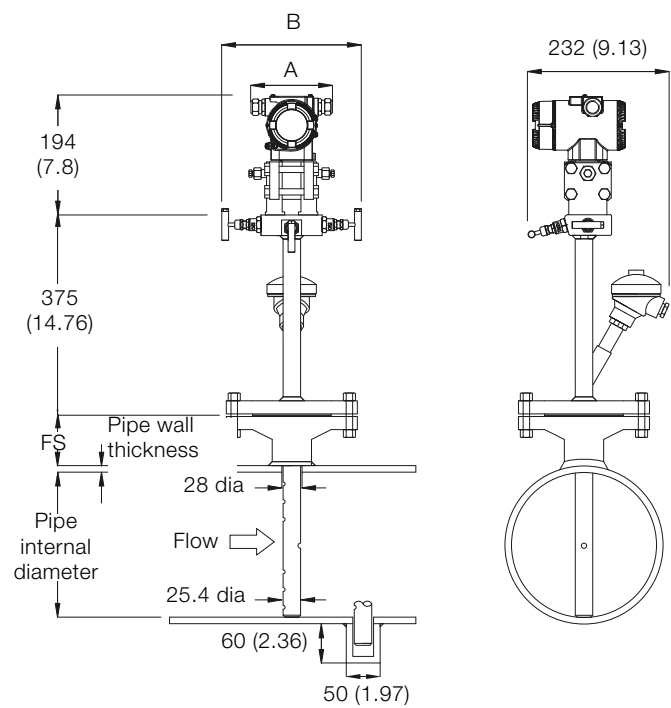

A	154 (6.06) over glands	
B	3-valve	202 (7.95) closed 212 (8.35) open
	5-valve	252 (9.92) closed 269 (10.59) open

Flange Rating	150 lb	300 lb	PN10 PN16	PN25
FS	95 (3.74)	100 (3.94)	78 (3.07)	78 (3.07)

PitoMaster FPD550

Compact averaging pitot flowmeter

Ordering information

										Main code										Optional code							
PitoMaster compact averaging pitot flowmeter										FPD550	XX	XXX	X	XX	XX	XX	X	X	X	X	X	X	XX	XX	XX	XX	XX
Model and design level																											
PitoMaster V, for volume flow, design level 1 (364DS)										V1																	
PitoMaster V, for volume flow, design level 2 (266DSH)										V2																	
PitoMaster M, for mass flow, design level 1 (267CS)										M1																	
Meter size (nominal inside diameter) specify actual id within range...																											
100 mm (4 in.)										88 ... 111 mm (3.5 ... 4.4 in.)	100																
125 mm (5 in.)										112 ... 137 mm (4.4 ... 5.4 in.)	125																
150 mm (6 in.)										138 ... 174 mm (5.4 ... 6.9 in.)	150																
200 mm (8 in.)										175 ... 224 mm (6.9 ... 8.8 in.)	200																
250 mm (10 in.)										225 ... 274 mm (5.4 ... 6.9 in.)	250																
300 mm (12 in.)										275 ... 324 mm (3.5 ... 4.5 in.)	300																
350 mm (14 in.)										325 ... 374 mm (4.5 ... 5.5 in.)	350																
400 mm (16 in.)										375 ... 424 mm (5.5 ... 6.9 in.)	400																
450 mm (18 in.)										425 ... 474 mm (5.4 ... 6.9 in.)	450																
500 mm (20 in.)										475 ... 549 mm (18.5 ... 21.5 in.)	500																
600 mm (24 in.)										550 ... 674 mm (21.5 ... 26.5 in.)	600																
Fluid																											
Liquid										L																	
Gas										G																	
Steam										S																	
Fitting material																											
A105 CS pipe fitting										C1																	
316L SS fitting										S6																	
Process connection type																											
Threaded, 1 in. BSPT process connection with weld fitting										B3																	
Threaded, 1 in. BSPT process connection with weld fitting and weld cup end support										B4																	
Threaded, 1 in. NPT process connection with weld fitting										N3																	
Threaded, 1 in. NPT process connection with weld fitting and weld cup end support										N4																	
Flanged RF process connection DN 40 (1½ in.), with flanged stand-off, nuts, bolts and gaskets										F3																	
Flanged RF process connection DN 40 (1½ in.), with flanged stand-off, nuts, bolts, gaskets and weld cup end support										F4																	

Continued on next page ...

Continued on next page ...

PitoMaster compact averaging pitot flowmeter

Main code													
FPD550	XX	XXX	X	XX	XX	XX	X	X	X	X	X	X	XX
See page 16													
							Y0						
							A1						
							A3						
							D1						
							D3						
							H						
							V						
								3					
								5					
								A					
								B					
								C					
								E					
								F					
								G					
								H					
								L					

Continued on next page ...

Optional code

XX	XX	XX	XX	XX
See page 19				

PitoMaster FPD550

Compact averaging pitot flowmeter

Main code										Optional code																																
FPD550										XX	XXX	X	XX	XX	XX	X	X	X	X	X	X	XX	XX	XX	XX	XX																
										See page 16					See page 17																											
Transmitter seal material																																										
Without seal																																										
Viton																																										
PTFE																																										
EPDM																																										
Perbunan																																										
Electronic housing material / electrical connection																																										
Aluminium alloy / 1/2-14 NPT																																										
Aluminium alloy / M20 x 1.5																																										
AISI 304L SST / 1/2-14 NPT																																										
AISI 304L SST / M20 x 1.5																																										
AISI 316L SST / 1/2-14 NPT																																										
AISI 316L SST / M20 x 1.5																																										
Integrated digital display (LCD)																																										
None (blind)																																										
LCD display																																										
LCD display (backlit)																																										
TTG (through-the-glass) controlled digital LCD display																																										
Output signal																																										
HART digital communications and 4 ... 20 mA																																										
HART digital communications and 4 ... 20 mA, SIL2 and SIL3 certified to IEC 61508																																										
PROFIBUS PA																																										
FOUNDATION Fieldbus																																										
MODBUS RS 485																																										
Wireless HART																																										

PitoMaster compact averaging pitot flowmeter	Main code												Optional code				
	FPD550	XX	XXX	X	XX	XX	XX	X	X	X	X	X	XX	XX	XX	XX	XX
	See page 16																
Temperature element																	
Integral														AT			
Remote (element not included)														AR			
Certificates																	
Material monitoring with inspection certificate 3.1 acc. EN 10204														C2			
Dye penetrant NDE of welds														C9			
Hydrostatic pressure test certificate														CB			
Material monitoring NACE MR 01-75 with inspection certificate 3.1 acc. EN 10204														CN			
PED certificate (Pressure Equipment Directive 97 / 23 / EC)														CP			
Explosion protection certification																	
Factory mutual (FM) – intrinsically safe														EA			
Factory mutual (FM) – explosion proof														EB			
Canadian standard association (CSA) – explosion proof														EE			
ATEX + FM + CSA														EN			
ATEX II 1/2 GD EEx ia + ATEX II 1/2 GD EEx d + ATEX EEx nL														EW			
Documentation language																	
German														M1			
Italian														M2			
Spanish														M3			
French														M4			
Chinese														M6			
Special applications																	
Degreased (oil- and grease-free) with inert capsule filling for oxygen applications																P1	
Gold-plated diaphragm (silicone oil-filled) for hydrogen applications																P2	

Contact us

ABB Limited

Process Automation

Salterbeck Trading Estate

Workington, Cumbria

CA14 5DS

UK

Tel: +44 (0)1946 830 611

Fax: +44 (0)1946 832 661

ABB Inc.

Process Automation

125 E. County Line Road

Warminster

PA 18974

USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

www.abb.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2013 ABB

All rights reserved

3KXF511551R1001

DS/FPD550-EN Rev. C 12.2013



Our offering:

	Actuators and Positioners		Analytical Instruments
	Device Management, Fieldbus and Wireless		Flow Measurement
	Force Measurement		Level Measurement
	Natural Gas Measurement		Pressure Measurement
	Recorders and Controllers		Temperature Measurement

HMI – Automação e Instrumentação, Lda.

Travessa da Indústria, nº 111
4780-573 Santo Tirso
PORTUGAL

Tel. +351 252 850 501
Fax. +351 300 013 487

Web: www.hmi.pt

Email: hmi@hmi.pt