



FICHA TÉCNICA DE PRODUTO

PRODUCT DATASHEET

---

HMI – Automação e Instrumentação, Lda.

---

Rua dos 5 Caminhos, nº 570  
4780-382 Santo Tirso  
PORTUGAL

Tel. +351 252 850 501  
Fax. +351 300 013 487

Web: [www.hmi.pt](http://www.hmi.pt)

Email: [hmi@hmi.pt](mailto:hmi@hmi.pt)

# FieldKey NHU200 Wireless adapter

## Making wireless networks easy



### Wireless upgrade adapter

- Add WirelessHART capability to an installed HART Instrument
- 2.4 GHz operating frequency (ISM Band)

### Range

- Up to 200 m (656 ft) Outside
- Up to 50 m (164 ft) Inside

### Loop powered

- Does not require battery power
- Automatically adapts to available power

### Robust design

- Fixed antenna with rotating housing
- Potted electronics

### Small size to assist with installation

- Body 47 x 47 mm (1.85 x 1.85 in.)
- M20 and ½ in. NPT fitting

### Built to survive

- IP 67 and NEMA 4X environmental protection

### WirelessHART standard

- Reliable and simple wireless mesh network
- Adapts to nearby wireless networks (co-existence)
- Data encryption and authentication
- Channel hopping

### Certification

- IP 67
- HART 7
- 802.15.4 radio


### Applications

- Condition monitoring (ABB Asset Vision)
- Read all Process values from installed HART instruments
- Network repeater (extender)


# FieldKey NHU200 Wireless adapter

## Adapter mounting

The adapter can be mounted on the field instrument via a spare cable gland entry or via a T-Piece if no spare gland is available. It would also be possible to connect the adapter at another convenient point in the 4 to 20 mA loop, for example at a junction box.

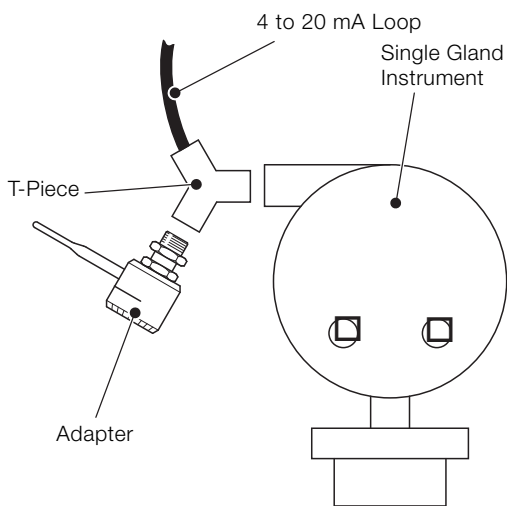

**Fig. 1: Single gland instrument**

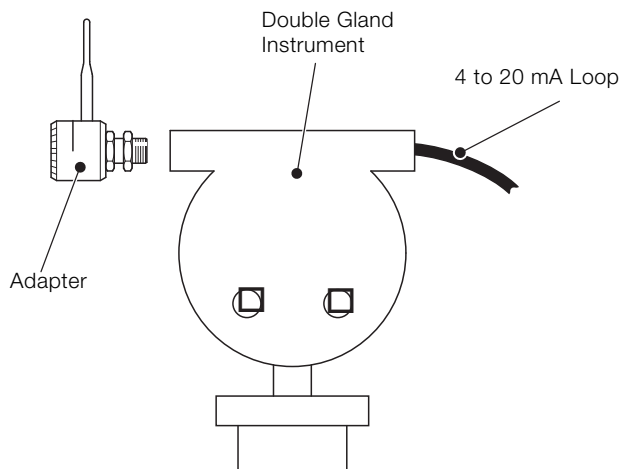

**Fig. 2: Via a spare gland on an instrument**

## Antenna

Omnidirectional antenna with vertical polarization.

### Antenna positioning

The antenna is positioned by rotating the adaptor housing until the antenna is in the best position (normally in a vertical direction). The housing can be locked by adjusting the Rotation locking nut.

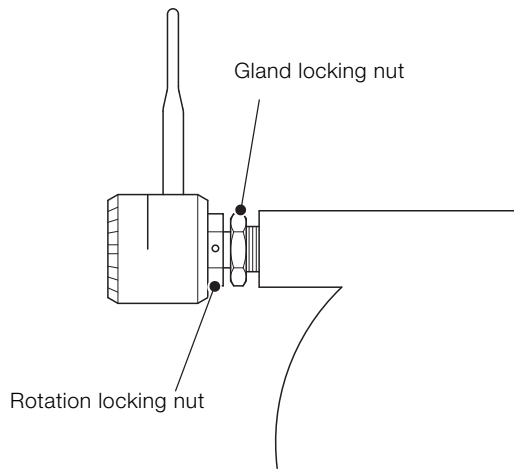


Fig. 3: Antenna positioning

## Electrical connections

The FieldKey wireless adapter uses energy harvesting where power is taken from the 4 to 20 mA instrument loop, as a result there is no battery to install or maintain. The adapter is wired in series with the instrument loop as shown in this diagram. It may take up to 3 minutes for the adapter to store sufficient energy for it to be ready for commissioning (set Network Identity and Join Key).

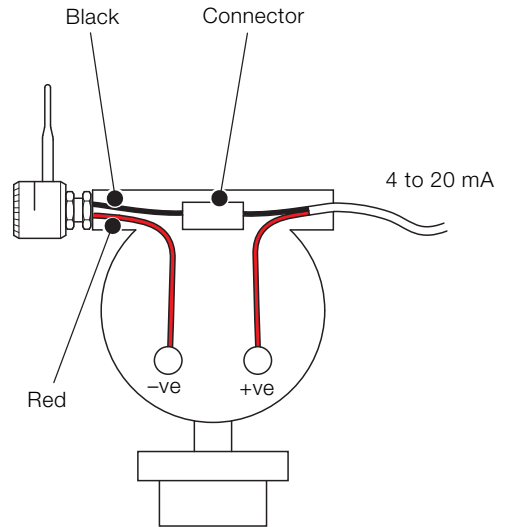


Fig. 4: Electrical connections

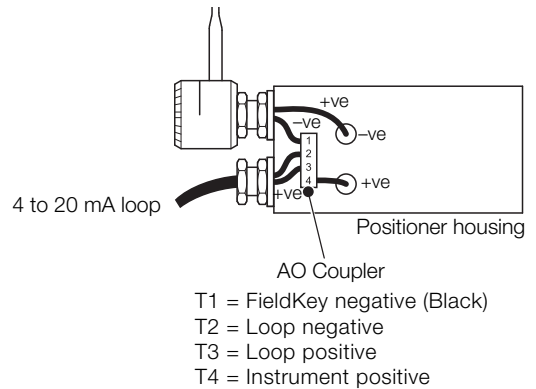


Fig. 5: Electrical connections AO coupler

# FieldKey NHU200

## Wireless adapter

### Technical specification

#### Electrical specifications

Communication type

- HART

Protocol version

- HART Version 7.0 wired and wireless
- HART Version 5.9 wired

Transmission range

- up to 200 m outside

Device loop power

- Power consumption 9 ... 51 mW  
(@ 3.6 ... 22 mA)
- Loop voltage drop max 2.3 V  
(no external 250  $\Omega$  resistor required)

Diagnosis

- Device status NE 107
- Wired communication quality and statistics
- Wireless communication quality and statistics
- Join status
- Subdevice status
- Subdevice information

#### Ambient specifications

Ambient temperature

- -40 ... 85 °C (-40 ... 185 °F)

Transport/Storage temperature

- -40 ... 85 °C (-40 ... 185 °F)

Climate class

- CX, -40 ... 85 °C (-40 ... 185 °F)
- 5 ... 95 % relative humidity (acc. with DIN EN 60654)

Relative humidity

- max. 100 %, condensation permitted  
(acc. with EC 68000-2-30)

Vibration resistance

- 10 ... 2000 Hz at 5 g in acc. with IEC 60068-2-6  
during operation and transport

Shock resistance

- gn = 30 in acc. with IEC 60068-2-27  
during operation and transport

Type of protection

- IP 67 / NEMA 4X

#### Mechanical specifications

Weight

- 220 g (0.48 lb)

Housing material

- Polycarbonate

Color

- Grey RAL9002

Gland connection size

- Gland connection size M20 x 1.5 (AISI 316 SST) or  
1/2 in. NPT (AISI 316 SST)

Type of connection cable

- 0.75 mm<sup>2</sup> / AWG 20
- 0.3 m

#### Antenna

Type

- Omnidirectional antenna with vertical polarization, IP 67

#### T-Piece

Material

- Stainless steel AISI 316 SST

Connections

- M20 x 1.5 or 1/2 in. NPT

## Overall dimensions

Dimensions in mm (in.)

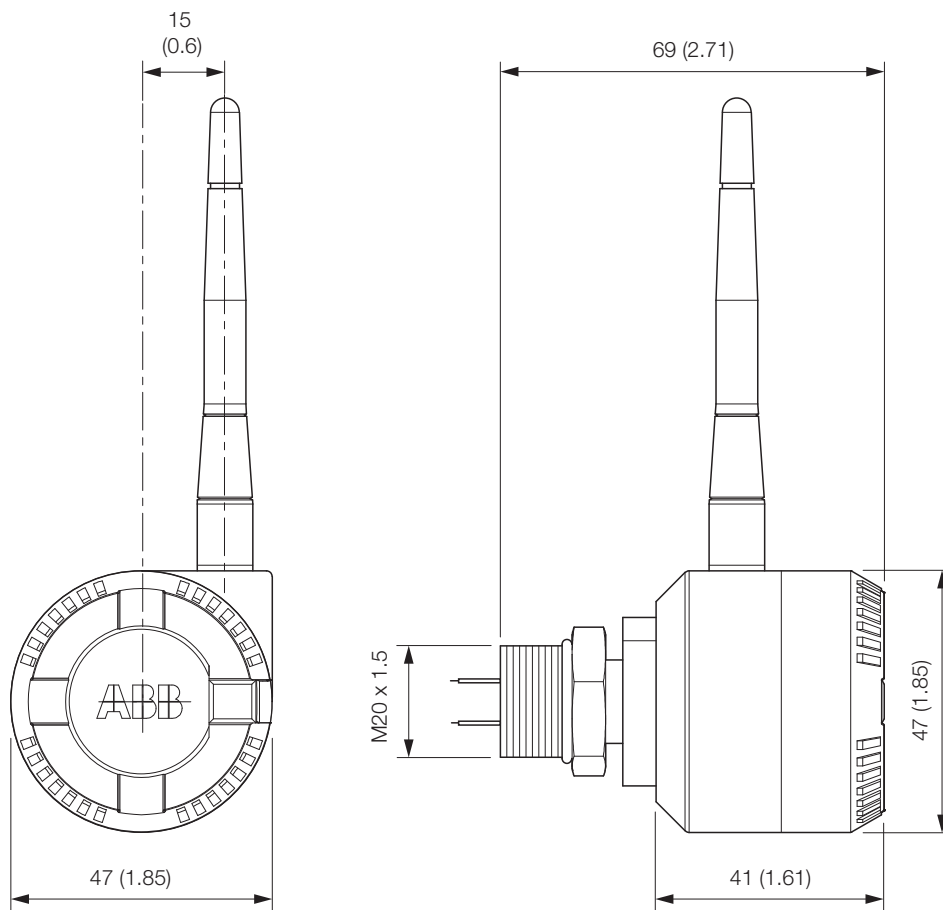


Fig. 6: Overall dimensions

# FieldKey NHU200 Wireless adapter

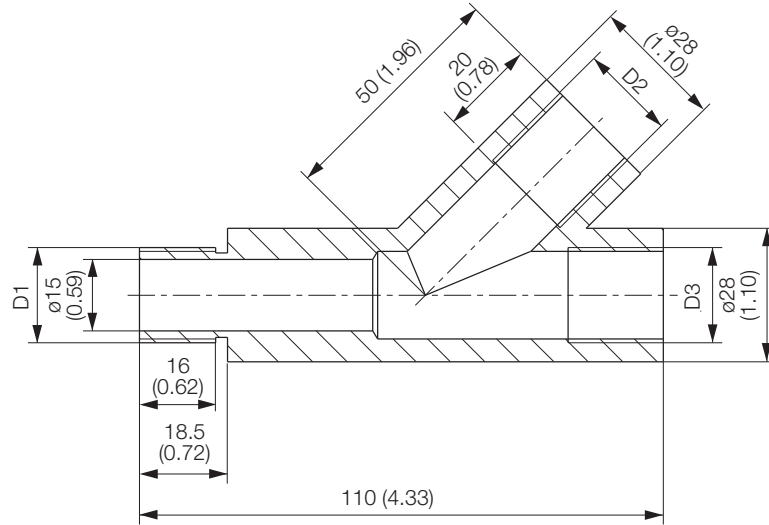


Fig. 7: Overall dimensions wireless T-piece

Index	Part No.	D1	D2	D3
1	CNW IP0010	M20 x 1.5-6g	M20 x 1.5-6H	M20 x 1.5-6H
2	CNW IP0011	1/2 " NPT	1/2 " NPT	1/2 " NPT







## Ordering information

FieldKey NHU200 wireless adapter	NHU200	XX	X	X	X	XX	XX
<b>Adapter HART FSK to Wireless Network</b>							
Loop powered - fixed antenna	WL						
Includes DD and DTM for host integration							
Includes CE Mark							
<b>Wireless Protocol</b>							
Wireless HART			1				
Others			9				
<b>Design</b>							
Wireless Adapter using a spare instrument gland for connection				A			
Wireless Adapter for use where the instrument has no spare gland for connection includes T-piece pipe mount				B			
<b>Gland Connection Size / Material</b>							
M20 x 1.5 / AISI 316 SST					5		
1/2 in. NPT / AISI 316 SST					6		
<b>Explosion Protection Certification</b>							
General purpose non-hazardous area						Y0	
<b>Documentation Language</b>							
English							M5





## Our offering:

	Actuators and Positioners		Analytical Instruments
	Device Management, Fieldbus and Wireless		Flow Measurement
	Force Measurement		Level Measurement
	Natural Gas Measurement		Pressure Measurement
	Recorders and Controllers		Temperature Measurement

---

HMI – Automação e Instrumentação, Lda.

---

Rua dos 5 Caminhos, nº 570  
4780-382 Santo Tirso  
PORTUGAL

Tel. +351 252 850 501  
Fax. +351 300 013 487

Web: [www.hmi.pt](http://www.hmi.pt)

Email: [hmi@hmi.pt](mailto:hmi@hmi.pt)

# Contact us

## **ABB Limited**

### **Process Automation**

Howard Road

St. Neots

Cambridgeshire PE19 8EU

UK

Tel: +44 (0)1480 475321

Fax: +44 (0)1480 217948

## **ABB Inc.**

### **Process Automation**

125 E. County Line Road

Warminster

PA 18974

USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

[www.abb.com](http://www.abb.com)

## Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2011 ABB

All rights reserved

3KXN674200R1001

DS/NHU200-EN 03.2011